


TUSB2040

4-PORT HUB FOR THE UNIVERSAL SERIAL BUS


SLLS260B – NOVEMBER 1996 – REVISED AUGUST 1997

- Universal Serial Bus (USB) Version 1.0 Compliant
- Integrated USB Transceivers
- Four Downstream Ports
- Two Power Source Modes
 - Self-powered Mode
 - Bus-powered Mode
- Power Switching and Overcurrent Reporting is Provided Per Port or Ganged
- Suspend Status Terminal Available for External Logic Power Down
- All Downstream Ports Support Full-Speed and Low-Speed Operations
- Supports Suspend and Resume Operations
- Available in 28-Pin DIP Package and a 48-Pin TQFP[†] Package
- 3.3-V Operation

N PACKAGE
(TOP VIEW)

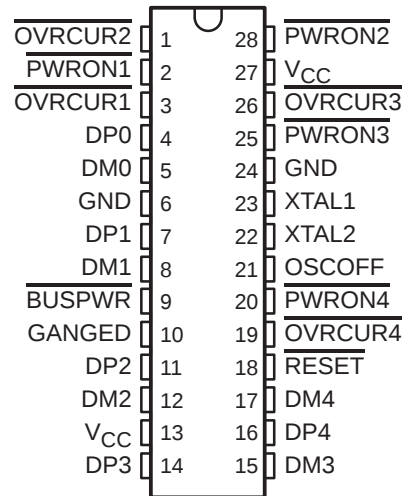

PT PACKAGE
(TOP VIEW)

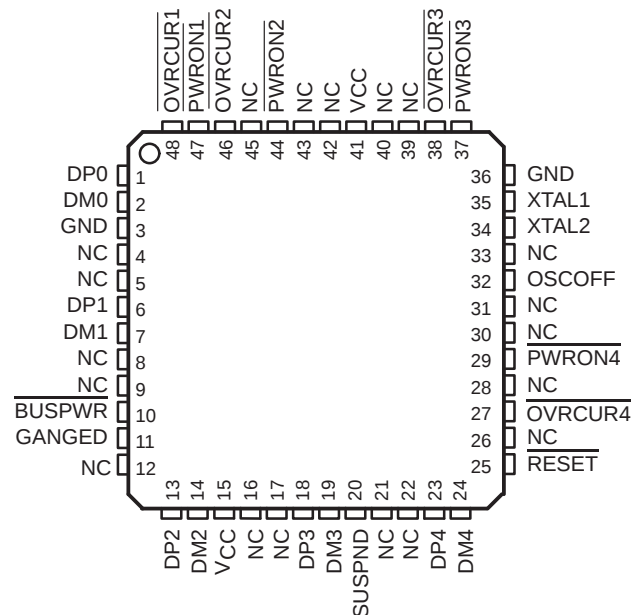

description

The TUSB2040 hub is a CMOS device that provides up to four downstream ports in conformance with the USB specification, version 1.0. It supports two power source modes: bus-powered and self-powered. The hub and downstream ports share the same power source. The TUSB2040 hub powers down to 20 nA during the suspend operation by powering down the internal oscillator.

The TUSB2040 hub supports power switching to the downstream ports either individually or ganged. An external device or devices are required to switch power and to detect overcurrent conditions. The TUSB2040 provides outputs to control power switching and inputs to monitor any overcurrent conditions. In the ganged operation, all PWRON signals transition simultaneously, and any OVRCUR input may be used.

[†] JEDEC descriptor S-PQFP-G for thin quad flatpack (TQFP)



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1997, Texas Instruments Incorporated

TUSB2040


4-PORT HUB FOR THE UNIVERSAL SERIAL BUS

SLLS260B – NOVEMBER 1996 – REVISED AUGUST 1997

The hub requires a 48-MHz clock signal to sample data from the upstream port and generate a synchronized 12-MHz USB clock signal. The hub supports the flexibility to use either a 48-MHz oscillator or a crystal tuned to 48-MHz. If an oscillator is used, connect its output to the XTAL1 terminal and leave the XTAL2 terminal open. An oscillator with TTL output may be used if the output does not exceed 3.6 V. For a crystal implementation, use the XTAL1 terminal as the input and the XTAL2 terminal as the feedback path to the crystal. Because the crystal is required to resonate at 48-MHz, a tuning circuit as shown in Figure 6 may be required.

USB-compliant transceivers are provided for the upstream port and all downstream ports. Every downstream port supports both full- and low-speed connection by automatically setting the slew rate according to the speed of the device attached to the port.

functional block diagram

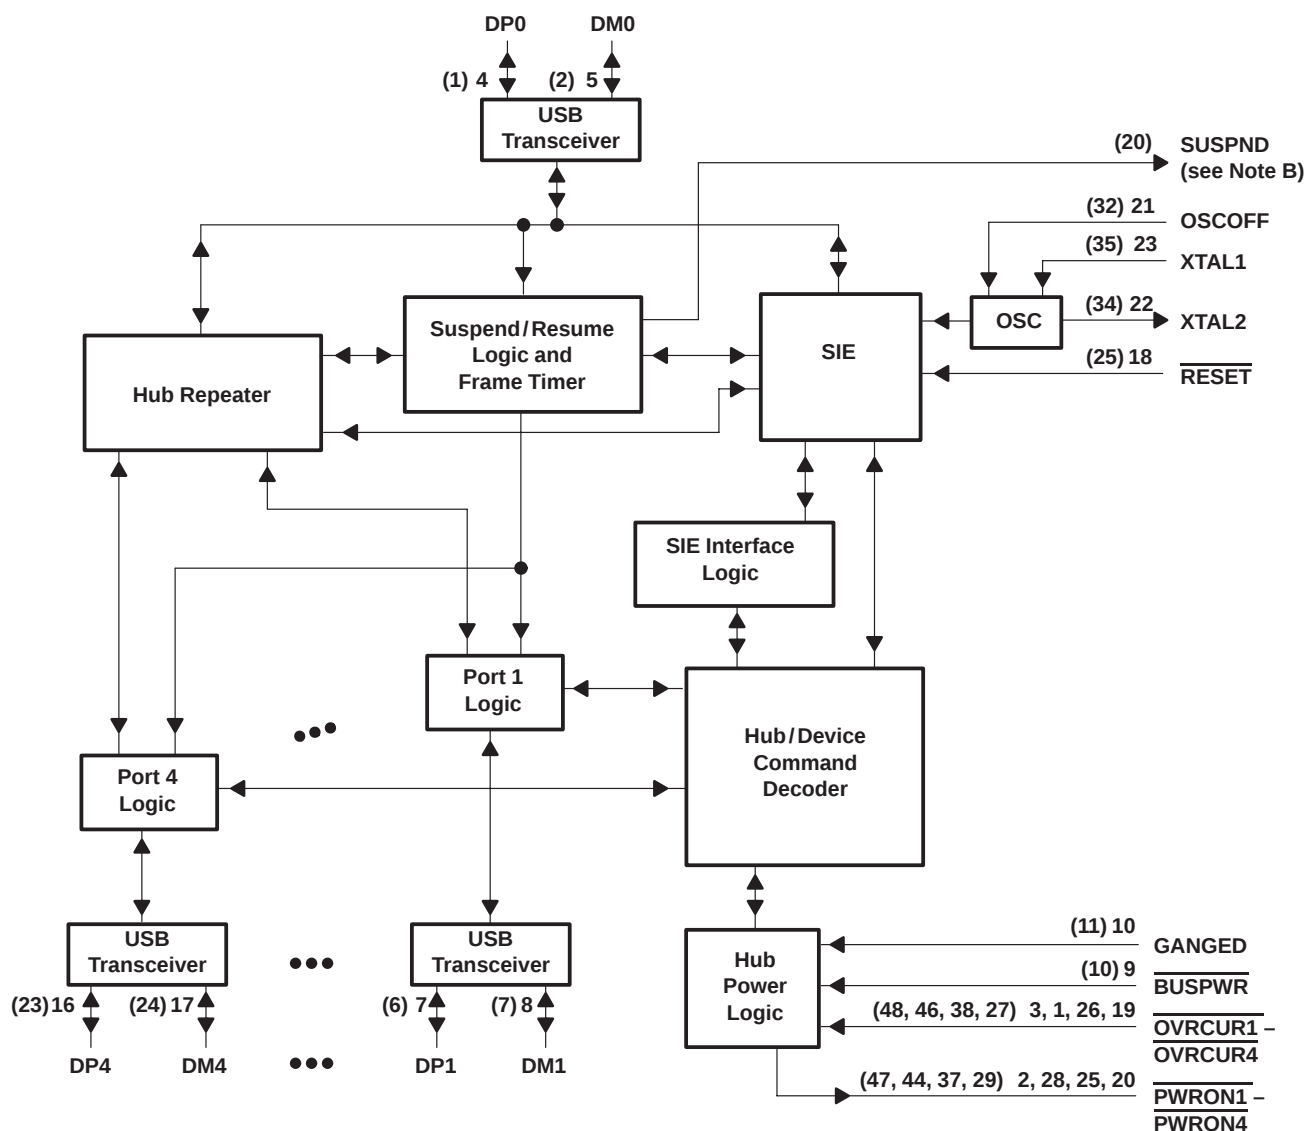

NOTES: A. Pins in parentheses are for TQFP package
B. SUSPND output only available in TQFP package

TUSB2040

4-PORT HUB FOR THE UNIVERSAL SERIAL BUS

SLLS260B – NOVEMBER 1996 – REVISED AUGUST 1997

Terminal Functions

TERMINAL			I/O	DESCRIPTION
NAME	N NO.	PT NO.		
<u>BUSPWR</u>	9	10	I	Power source indicator. <u>BUSPWR</u> is an active low input that indicates whether the ports and the hub derive power from the bus or are self-powered by the local supply. This standard TTL input must not change dynamically during operation.
DM0	5	2	I/O	Root port USB differential data minus. DM0 paired with DP0 constitutes the upstream USB port.
DM1 – DM4	8, 12, 15, 17	7, 14, 19, 24	I/O	USB differential data minus. DM1 – DM4 paired with DP1 – DP4 support up to four downstream USB ports.
DP0	4	1	I/O	Root port USB differential data plus. DP0 paired with DM0 constitutes the upstream USB port.
DP1 – DP4	7, 11, 14, 16	6, 13, 18, 23	I/O	USB differential data plus. DP1 – DP4 paired with DM1 – DM4 support up to four downstream USB ports.
GANGED	10	11	I	Power switching/overcurrent detection mode. GANGED selects between gang or per port switching and overcurrent detection for downstream ports. This standard TTL input must not change dynamically during operation.
GND	6, 24	3, 36		Ground. GND terminals must be tied to ground for proper operation.
OSCOFF	21	32	I	Oscillator off. OSCOFF disables the internal oscillator for quiescent current draw (ICCQ) testing. It must be tied low for proper operation.
<u>OVRCUR1</u> – <u>OVRCUR4</u>	3, 1, 26, 19	48, 46, 38, 27	I	Overcurrent indicators. <u>OVRCUR1</u> – <u>OVRCUR4</u> are active low, standard TTL inputs. One overcurrent indicator is available for each of the four downstream ports. In GANGED mode, one implementation is to tie these inputs together. Alternatively, one OVRCUR input pin may be used with the remaining OVRCUR pins tied to V _{CC} .
<u>PWRON1</u> – <u>PWRON4</u>	2, 28, 25, 20	47, 44, 37, 29	O	Power-on/off control signals. <u>PWRON1</u> – <u>PWRON4</u> are active low, open-drain outputs. One power on/off control switch is used for each of the four downstream ports. In GANGED mode, all outputs are switched together.
<u>RESET</u>	18	25	I	Reset. <u>RESET</u> is an active low TTL input with hysteresis and must be asserted at power up. When <u>RESET</u> is asserted it initializes all logic.
SUSPND	–	20	O	Suspend status. SUSPND is an active high output that is available for external logic power down operations. During the SUSPEND mode, SUSPND is high. SUSPND is low for normal operation.
V _{CC}	13, 27	15, 41		3.3-V supply voltage
XTAL1	23	35	I	Crystal 1. XTAL1 is a 48-MHz crystal input with 50 % duty cycle. Operation at 48-MHz is four times the USB full-speed bit rate of 12-Mbps.
XTAL2	22	34	O	Crystal 2. XTAL2 is a 48-MHz crystal output. Operation at 48-MHz is four times the USB full-speed bit rate of 12-Mbps. This terminal is left open when using an oscillator.

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage range, V _{CC} (see Note 1)	–0.5 V to 3.8 V
Input voltage range, V _I	–0.5 V to V _{CC} + 0.5 V
Output voltage range, V _O	–0.5 V to V _{CC} + 0.5 V
Input clamp current, I _{IK} , (V _I < 0 V or V _I > V _{CC})	±20 mA
Output clamp current, I _{OK} , (V _O < 0 V or V _O > V _{CC})	±20 mA
Storage temperature range, T _{stg}	–65°C to 150°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage levels are with respect to GND.



TUSB2040

4-PORT HUB FOR THE UNIVERSAL SERIAL BUS

SLLS260B – NOVEMBER 1996 – REVISED AUGUST 1997

recommended operating conditions

	MIN	NOM	MAX	UNIT
Supply voltage, V_{CC}	3	3.3	3.6	V
Input voltage, TTL/LVCMOS, V_I	0		V_{CC}	V
Output voltage, TTL/LVCMOS, V_O	0		V_{CC}	V
High-level input voltage, signal-ended receiver, $V_{IH(REC)}$	2		V_{CC}	V
Low-level input voltage, signal-ended receiver, $V_{IL(REC)}$			0.8	V
High-level input voltage, TTL/LVCMOS, $V_{IH(TTL)}$	2		V_{CC}	V
Low-level input voltage, TTL/LVCMOS, $V_{IL(TTL)}$			0.8	V
Operating free-air temperature, T_A	0		70	°C
External series, differential driver resistor, $R_{(DRV)}$	22 (–5%)		22 (+5%)	Ω
Operating (dc differential driver) high speed mode, $f_{(OPRH)}$			12	Mb/s
Operating (dc differential driver) low speed mode, $f_{(OPRL)}$			1.5	Mb/s
Common mode, input range, differential receiver, $V_{(ICR)}$	0.8		2.5	V
Input transition times, t_t , TTL/LVCMOS	0		6	ns

electrical characteristics over recommended ranges of operating free-air temperature and supply voltage (unless otherwise noted)

PARAMETER			TEST CONDITIONS		MIN	MAX	UNIT
V_{OH}	High-level output voltage	USB data lines	$R_{(DRV)} = 15\text{ k}\Omega$, to GND		2.8	3.6	V
			$I_{OH} = -12\text{ mA}$ (without $R_{(DRV)}$)		$V_{CC} - 0.5$		
V_{OL}	Low-level output voltage	TTL/LVCMOS	$I_{OL} = 4\text{ mA}$			0.5	V
		USB data lines	$R_{(DRV)} = 1.5\text{ k}\Omega$ to 3.6 V			0.3	
			$I_{OL} = 12\text{ mA}$ (without $R_{(DRV)}$)			0.5	
V_{IT+}	Positive input threshold voltage	TTL/LVCMOS				2	V
		Single-ended	$0.8\text{ V} \leq V_{ICR} \leq 2.5\text{ V}$			1.8	V
V_{IT-}	Negative-input threshold voltage	TTL/LVCMOS			0.8		V
		Single-ended	$0.8\text{ V} \leq V_{ICR} \leq 2.5\text{ V}$		1		V
V_{hys}	Input hysteresis [†] ($V_{T+} - V_{T-}$)	TTL/LVCMOS			0.25	0.7	V
		Single-ended	$0.8\text{ V} \leq V_{ICR} \leq 2.5\text{ V}$		300	500	mV
I_{OZ}	High-impedance output current	TTL/LVCMOS	$V = V_{CC}$ or GND [‡]			± 10	μA
		USB data lines	$0\text{ V} \leq V_O \leq V_{CC}$			± 10	μA
I_{IL}	Low-level input current	TTL/LVCMOS	$V_I = \text{GND}$			–1	μA
I_{IH}	High-level input current	TTL/LVCMOS	$V_I = V_{CC}$			1	μA
$Z_{O(DRV)}$	Driver output impedance	USB data lines	Static V_{OH} or V_{OL}		7.1	19.9	Ω
V_{ID}	Differential input voltage	USB data lines	$0.8\text{ V} \leq V_{ICR} \leq 2.5\text{ V}$		0.2		V
I_{CC}	Input supply current		Normal operation			100	mA
			Suspend mode			1	μA

[†] Applies for input buffers with hysteresis

[‡] Applies for open drain buffers



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

differential driver switching characteristics over recommended ranges of operating free-air temperature and supply voltage, $C_L = 50$ pF unless otherwise noted (see Figures 1 and 2)

full speed mode

PARAMETER	TEST CONDITIONS	MIN	MAX	UNIT
t_r Transition rise time for DP or DM	See Figure 1 and Figure 2	4	20	ns
t_f Transition fall time for DP or DM	See Figure 1 and Figure 2	4	20	ns
$t_{(RFM)}$ Rise/fall time matching	$(t_r/t_f) \times 100$	90	110	%
$V_{O(CRS)}$ Signal crossover output voltage		1.3	2.0	V

low speed mode

PARAMETER	TEST CONDITIONS	MIN	MAX	UNIT
t_r Transition rise time for DP to DM	$C_L = 50$ pF to 350 pF, See Figure 1 and Figure 2	75	300	ns
t_f Transition fall time for DP to DM	$C_L = 50$ pF to 350 pF, See Figure 1 and Figure 2	75	300	ns
$t_{(RFM)}$ Rise/fall time matching	$(t_r/t_f) \times 100$	80	120	%
$V_{O(CRS)}$ Signal crossover output voltage	$C_L = 50$ pF to 350 pF	1.3	2.0	V

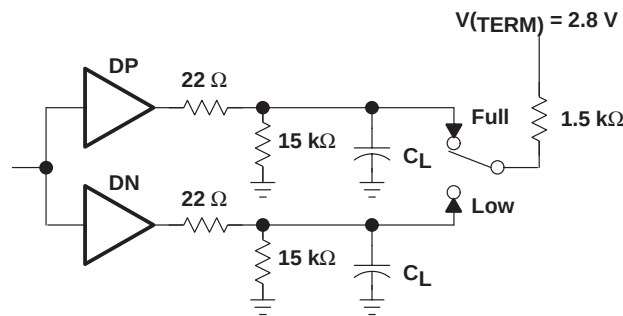


Figure 1. Differential Driver Switching Load

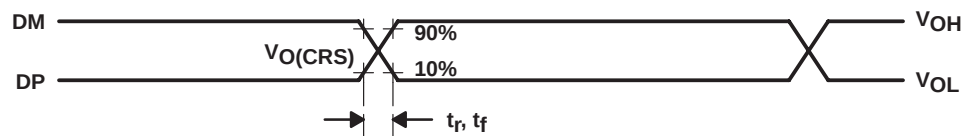


Figure 2. Differential Driver Timing Waveforms

TUSB2040

4-PORT HUB FOR THE UNIVERSAL SERIAL BUS

SLLS260B – NOVEMBER 1996 – REVISED AUGUST 1997

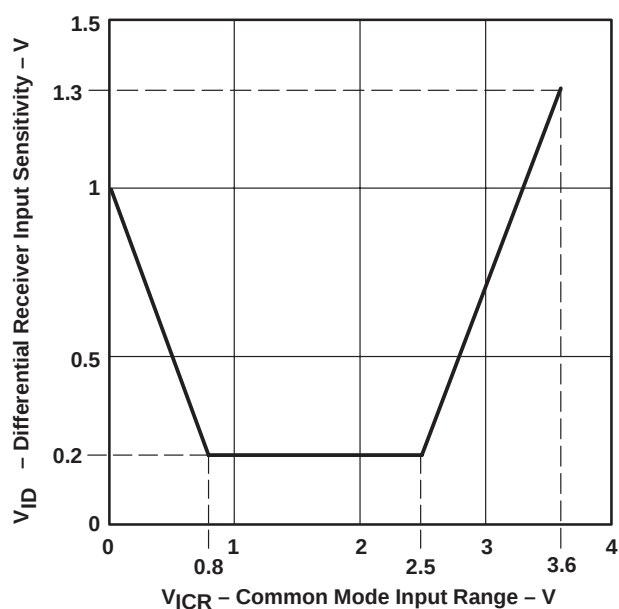


Figure 3. Differential Receiver Input Sensitivity vs. Common Mode Input Range

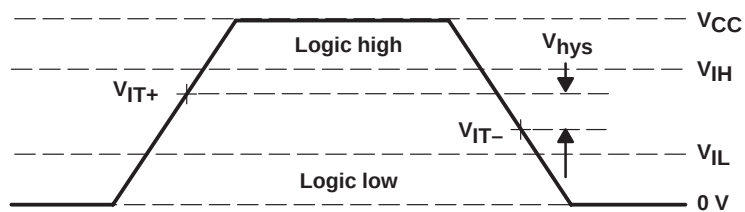



Figure 4. Single-Ended Receiver Input Signal Parameter Definitions

APPLICATION INFORMATION

USB design notes

The USB is a serial bus interface providing power and data to peripheral functions that include printers, monitors, joysticks, mice, keyboards and hubs. The USB specifies three power modes for functions: low-power, high-power, and self-powered. Low-power functions may draw a maximum current of 100 mA from the USB 5-V line. High-power functions may draw a maximum current of 500 mA from the USB 5-V line and may only be connected to self-powered hubs. Self-powered functions contain their own power supply, but are permitted a maximum current draw of 100 mA from the USB 5-V line for communication purposes. (A typical application of the TUSB2040 universal serial bus hub is shown in Figure 5).

All USB data lines must be terminated with 22-Ω resistors. All downstream port data lines (DM1 – DM4, DP1 – DP4) must be pulled down with 15-kΩ resistors. DP0 must be pulled up with a 1.5-kΩ resistor (see Figure 1).

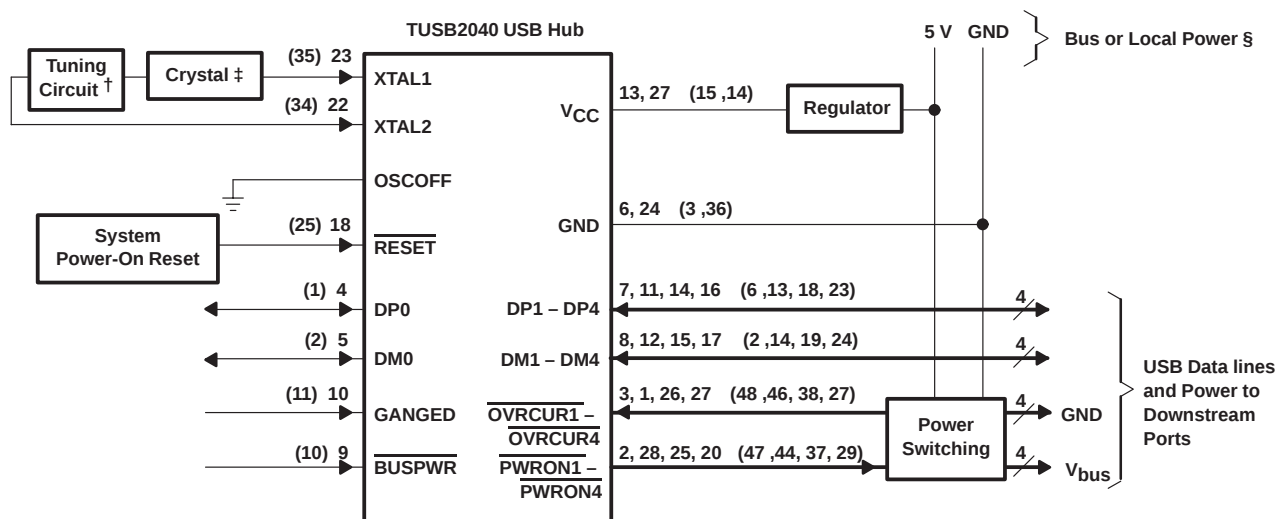


† Values for timing components are subject to change when using different crystals and PCBs.

‡ The crystal in this application is a 48-MHz US Crystal, P/N HC-18/U 48MHZ.

§ BUSPWR input should be set according to the system power source. If self-powered, the local ground is tied to the USB ground.

¶ Pin numbers in parentheses are for TQFP package only.

Figure 5. Typical Application of the TUSB2040 USB Hub

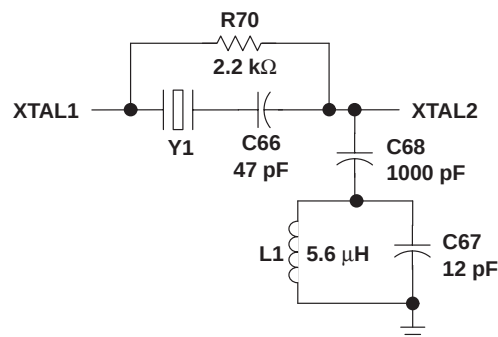

NOTES: C. When tuning the crystal (Y1) for different board implementations, the capacitor (C67) is subject to change. Other components should remain the same.

Figure 6. Tuning Circuit

TUSB2040

4-PORT HUB FOR THE UNIVERSAL SERIAL BUS

SLLS260B – NOVEMBER 1996 – REVISED AUGUST 1997

APPLICATION INFORMATION

A major advantage of USB is the ability to connect 127 functions configured in up to 6 logical layers (tiers) to a single personal computer (See Figure 7).

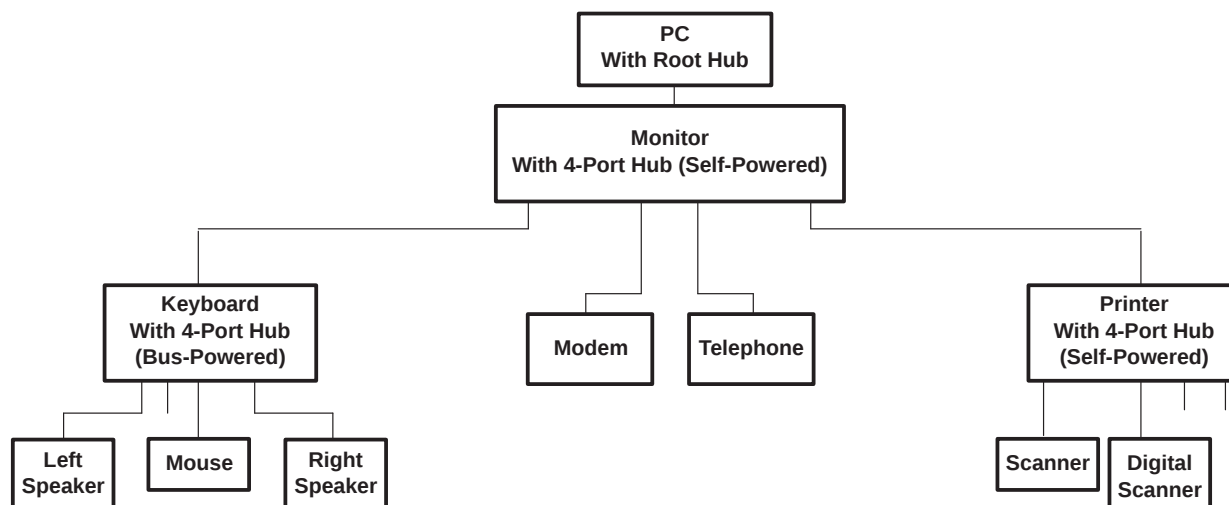


Figure 7. USB Tiered Configuration Example

Another advantage of USB is that all peripherals are connected using a standardized 4-wire cable which provides both communication and power distribution. The three power configurations are Bus-Powered, Self-Power and High-Power mode. For all three configurations, 100 mA is the maximum current that may be drawn from the USB 5 V line during power-up. For Bus-Power mode, a hub can draw a maximum of 500 mA from the 5 V line of the USB cable. A Bus-Powered hub must always be connected downstream to a Self-Powered hub unless it is the only hub connected to the PC and there are no High-Powered functions connected downstream. In the Self-Power mode, the hub is connected to its own power supply and can supply up to 500 mA to each downstream port. High-Powered functions may draw a maximum of 500 mA and may only be connected downstream to Self-Powered hubs.

Both Bus-Powered and Self-Powered hubs require over-current protection for all downstream ports. The two types of protection are individual port management (individual port basis) or ganged port management (multiple port basis). Individual port management requires power management devices for each individual downstream port, but adds robustness to your USB system because, in the event of an over-current condition, the USB Host will only power-down the port that has the condition. The ganged configuration uses fewer power management devices and thus has lower system costs, but in the event of an over-current condition on any of the downstream ports, all the ganged ports will be disabled by the USB Host.

Using a combination of the `BUSPWR` and `GANGED` inputs, the TUSB2140 supports four modes of power management: Bus-Powered hub with either individual port power management or ganged port power management and the Self-Powered hub with either individual port power management or ganged port power management. Texas Instruments supplies the complete hub solution because we offer this TUSB2040, the TUSB2070 (7-port) and the TUSB2140 (4-port with I²C) hubs along with the power management chips needed to implement a fully USB Specification 1.0 compliant system. See Figure 8, 9 and 10 for example configurations.

bus-powered hub, ganged port power management

The schematic diagram illustrates a USB 2.0 to RS-485 bridge circuit centered around the TUSB2040 IC. The circuit is divided into three main sections: Upstream Port, TUSB2040 IC, and Downstream Ports.

Upstream Port: This section interfaces with a USB 2.0 host. It features a 5V supply line with a 4.7 μF capacitor and a 0.1 μF capacitor to ground. A 3.3V supply line is also present, with a 4.7 μF capacitor to ground. The 5V line is connected to the DP0 and DM0 pins of the TUSB2040. The 3.3V line is connected to the VCC pin. The GND pin is connected to ground. The DP1 and DM1 pins are connected to the D+ and D- lines of the USB 2.0 port. The DP2 and DM2 pins are connected to the D+ and D- lines of the first downstream RS-485 port. The DP3 and DM3 pins are connected to the D+ and D- lines of the second downstream RS-485 port. The DP4 and DM4 pins are connected to the D+ and D- lines of the third downstream RS-485 port. The PWRON1, PWRON2, PWRON3, and PWRON4 pins are connected to the EN pin of the TPS2014. The OVRCUR1, OVRCUR2, OVRCUR3, and OVRCUR4 pins are connected to the OC pin of the TPS2014. The XTAL1 and XTAL2 pins are connected to a 48-MHz crystal and a tuning circuit. The OCSOFF pin is connected to ground. The RESET pin is connected to ground. The GND pin is connected to ground.

TUSB2040 IC: The central component is the TUSB2040 IC, which provides the bridge functionality between the USB 2.0 port and the RS-485 ports. It has a BUSPWR pin connected to ground and a GANGED pin connected to a 3.3V supply. The IC has 16 pins in total, including the DP0, DM0, DP1, DM1, DP2, DM2, DP3, DM3, DP4, DM4, PWRON1, PWRON2, PWRON3, PWRON4, OVRCUR1, OVRCUR2, OVRCUR3, OVRCUR4, XTAL1, XTAL2, OCSOFF, RESET, and GND.

Downstream Ports: This section shows three RS-485 ports. Each port has a D+ line, a D- line, and a GND line. The D+ and D- lines are connected to the DP and DM pins of the TUSB2040. The GND line is connected to ground. Each port also has a 5V supply line, which is connected to the VCC pin of the TUSB2040. Each 5V supply line has a 120 μF capacitor to ground. Each port also has a ferrite bead connected to ground.

Power Management: The circuit includes two voltage regulators. The TPS7133 is a 3.3V LDO regulator that takes a 5V input and provides a 3.3V output to the VCC pin of the TUSB2040. The TPS2014 is a 3.3V LDO regulator that takes a 5V input and provides a 3.3V output to the VCC pin of the TUSB2040. The TPS2014 also has an EN pin connected to the PWRON pins and an OC pin connected to the OVRCUR pins.

Crystal and Timing: The circuit uses a 48-MHz crystal connected to the XTAL1 and XTAL2 pins of the TUSB2040. A tuning circuit is connected to the XTAL2 pin. The OCSOFF pin is connected to ground. The RESET pin is connected to ground.

Legend:

- † TPS2014, TPS7133, and SN75240 are Texas Instruments devices.
- ‡ Values for timing components subject to change when using different crystals and PCBs.
- § Minimum value required per USB specification, version 1.0.

Figure 8. TUSB2040 Bus-Powered Hub, Ganged Port Power Management Application

TUSB2040

4-PORT HUB FOR THE UNIVERSAL SERIAL BUS

SLLS260B – NOVEMBER 1996 – REVISED AUGUST 1997

APPLICATION INFORMATION

self-powered hub, ganged port power management

A self-powered TUSB2040 can also be implemented using ganged port power management. This implementation is similar to the individual power management except one TPS2015 provides power switching and overcurrent protection for two ports. Although this is a more economical solution, a fault on one downstream port will cause power to be removed from both downstream ports.


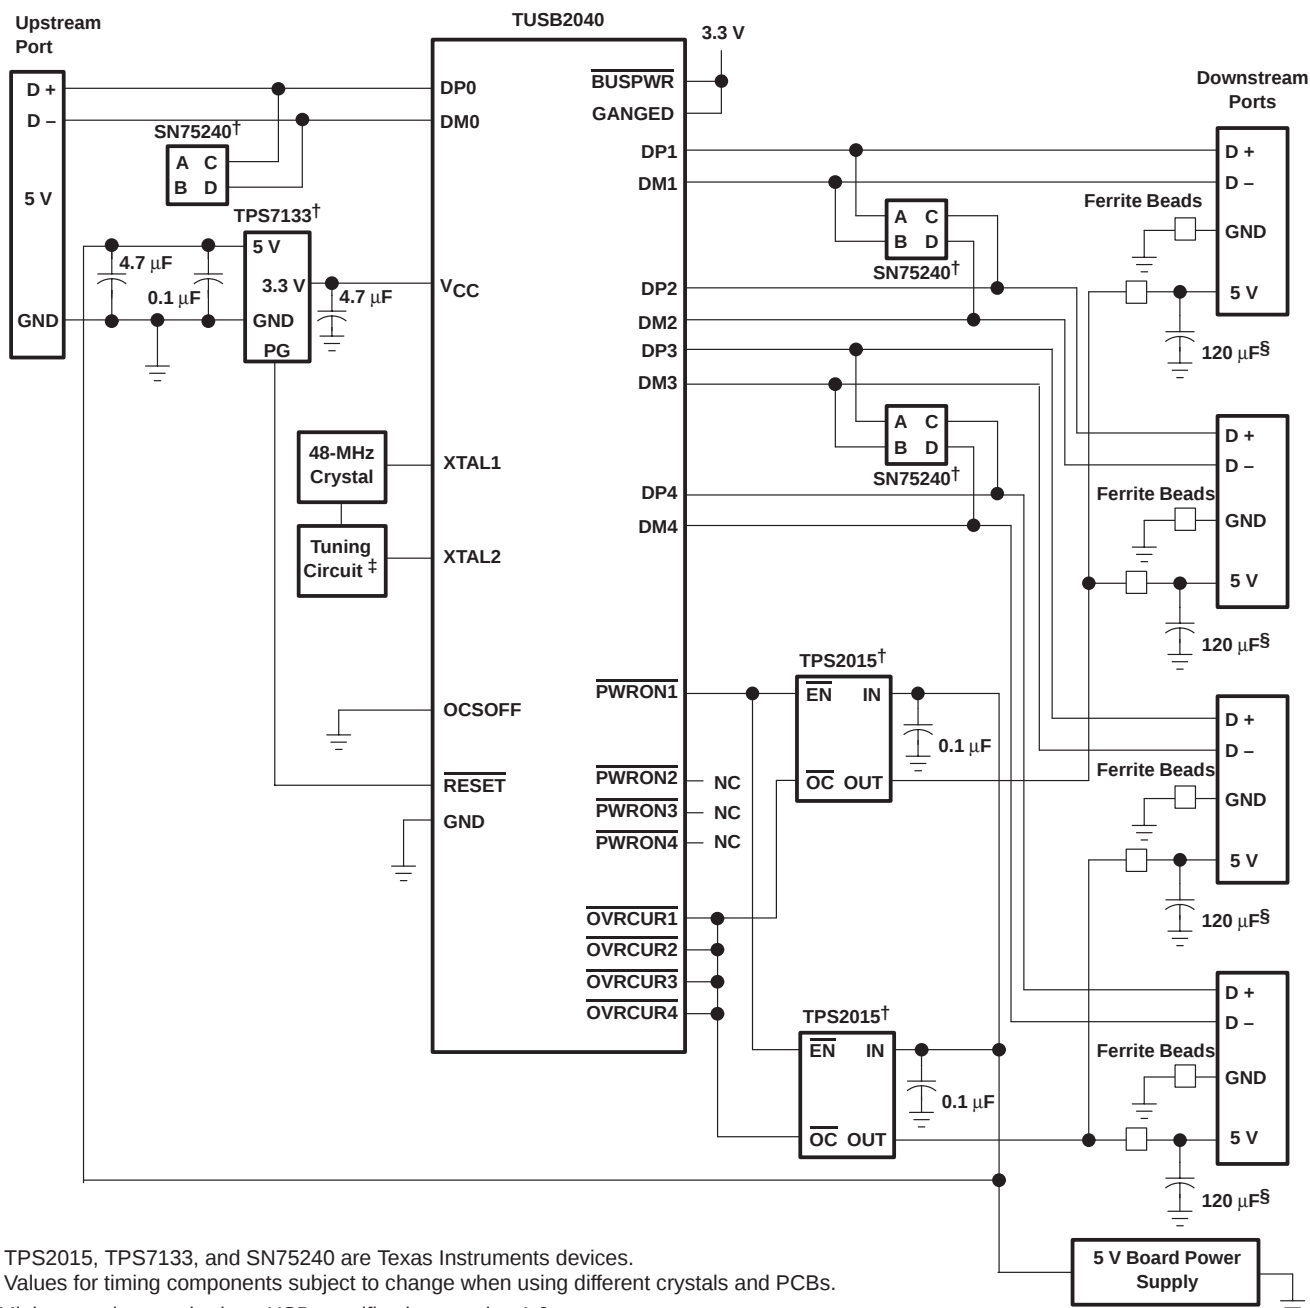


Figure 9. TUSB2040 Self-Powered Hub, Ganged Port Power Management Application

APPLICATION INFORMATION

self-powered hub, individual port power management

A self-powered TUSB2040 is capable of supplying 500 mA of current for low-power or high-power device class functions to each downstream port. Self-powered hubs are required to implement overcurrent protection. Individual-port power management (see Figure 10) utilizes the TPS2014 power switching and overcurrent protection that provide maximum robustness to the hub system. When the hub detects a downstream port fault, power is removed from the faulty port only, thus allowing other ports to continue normal operation. Individual SN75240 transient suppressors reduce in-rush current and voltage spikes. The TPS7133 Low-Dropout regulator provides a Power-Good (PG) signal for reset at power-up.

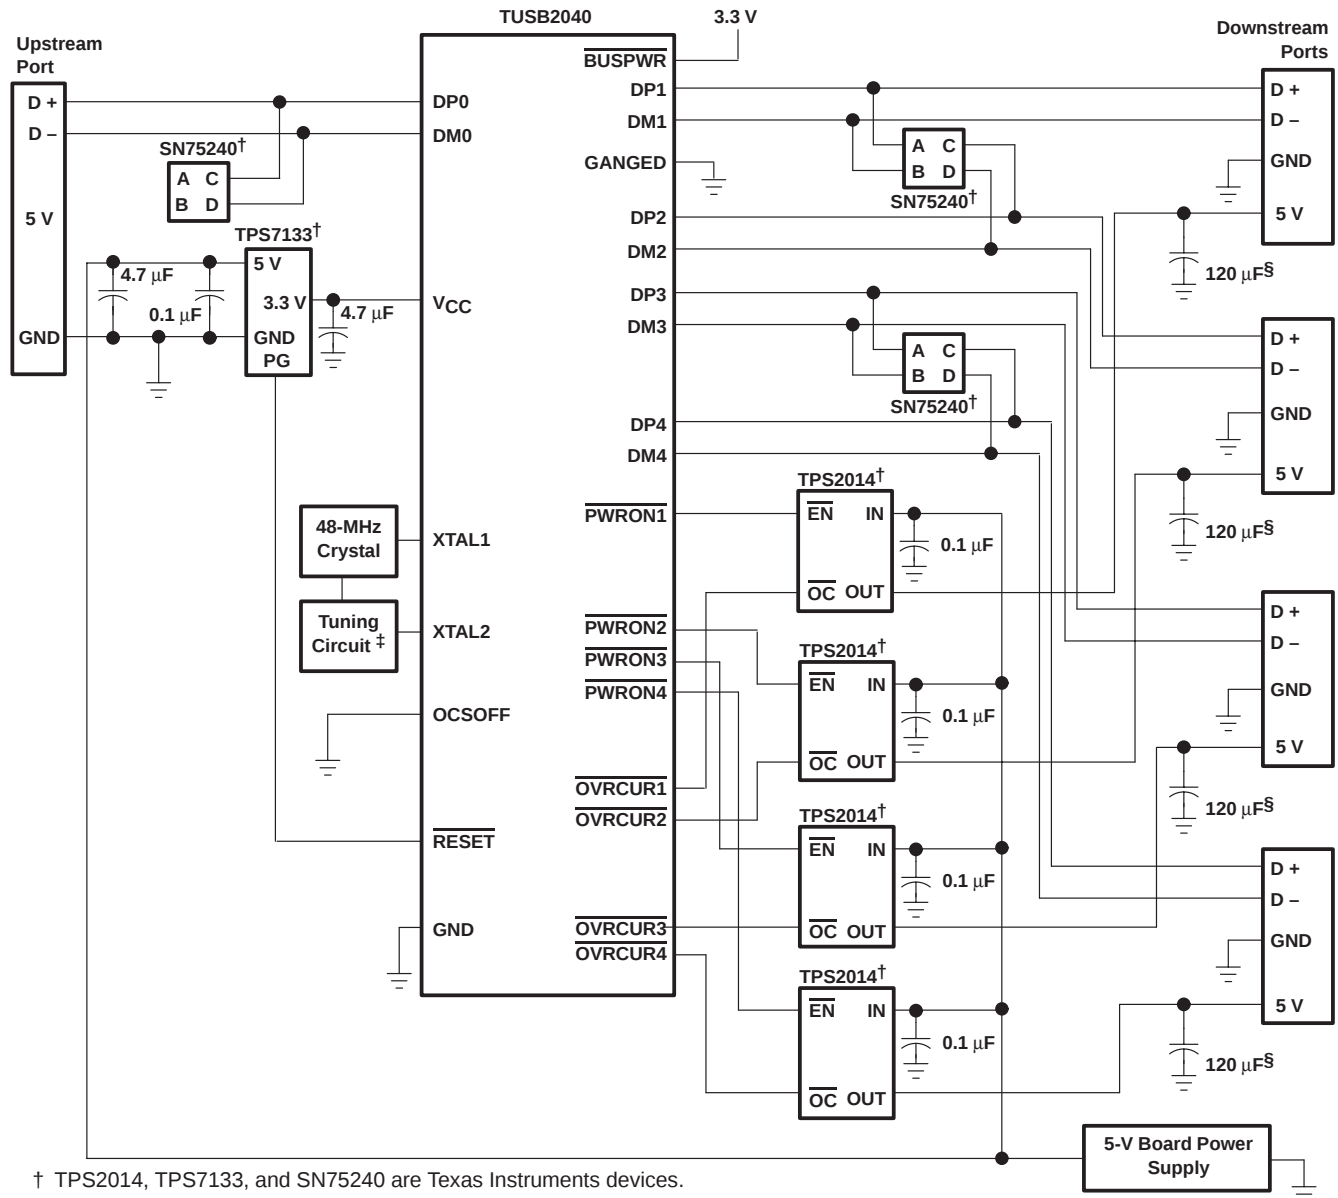

† TPS2014, TPS7133, and SN75240 are Texas Instruments devices.

‡ Values for timing components are subject to change when using different crystals and PCBs.

§ Minimum value required per USB specification, version 1.0.

Figure 10. TUSB2040 Self-Powered Hub, Individual-Port Power Management Application

TUSB2040

4-PORT HUB FOR THE UNIVERSAL SERIAL BUS


SLLS260B – NOVEMBER 1996 – REVISED AUGUST 1997

MECHANICAL DATA

N (R-PDIP-T**)

PLASTIC DUAL-IN-LINE PACKAGE

24 PIN SHOWN

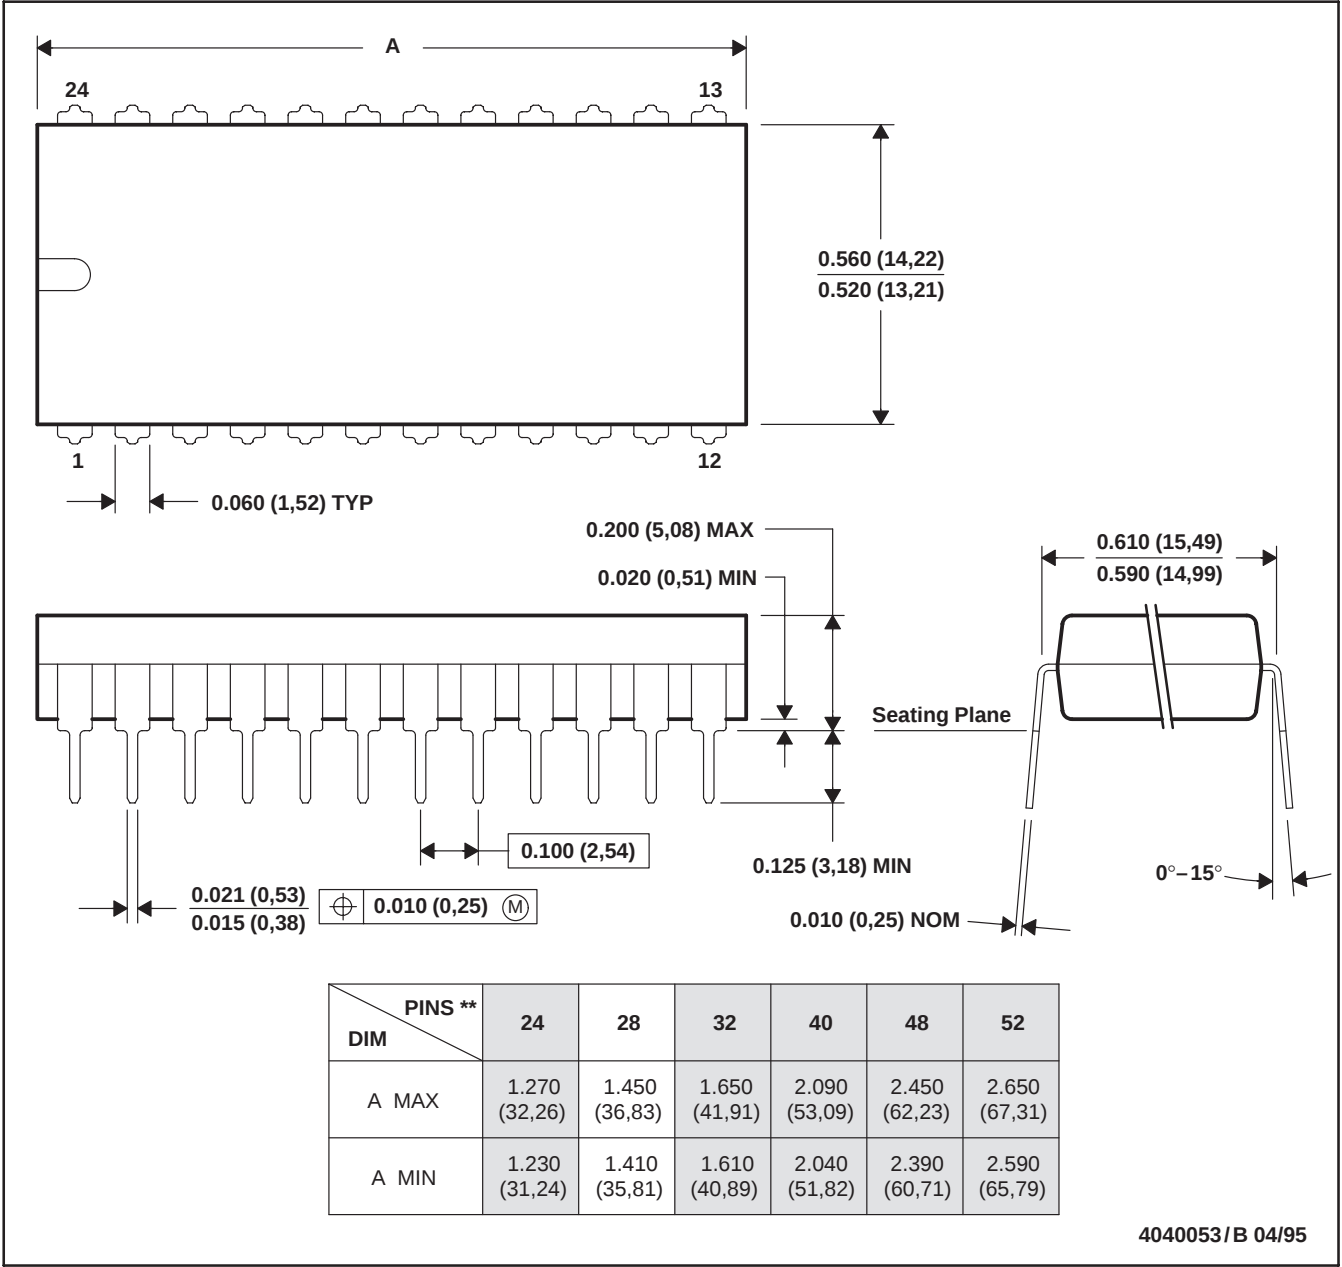


- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - C. Falls within JEDEC MS-011
 - D. Falls within JEDEC MS-015 (32-pin only)

MECHANICAL DATA

PT (S-PQFP-G48)

PLASTIC QUAD FLATPACK

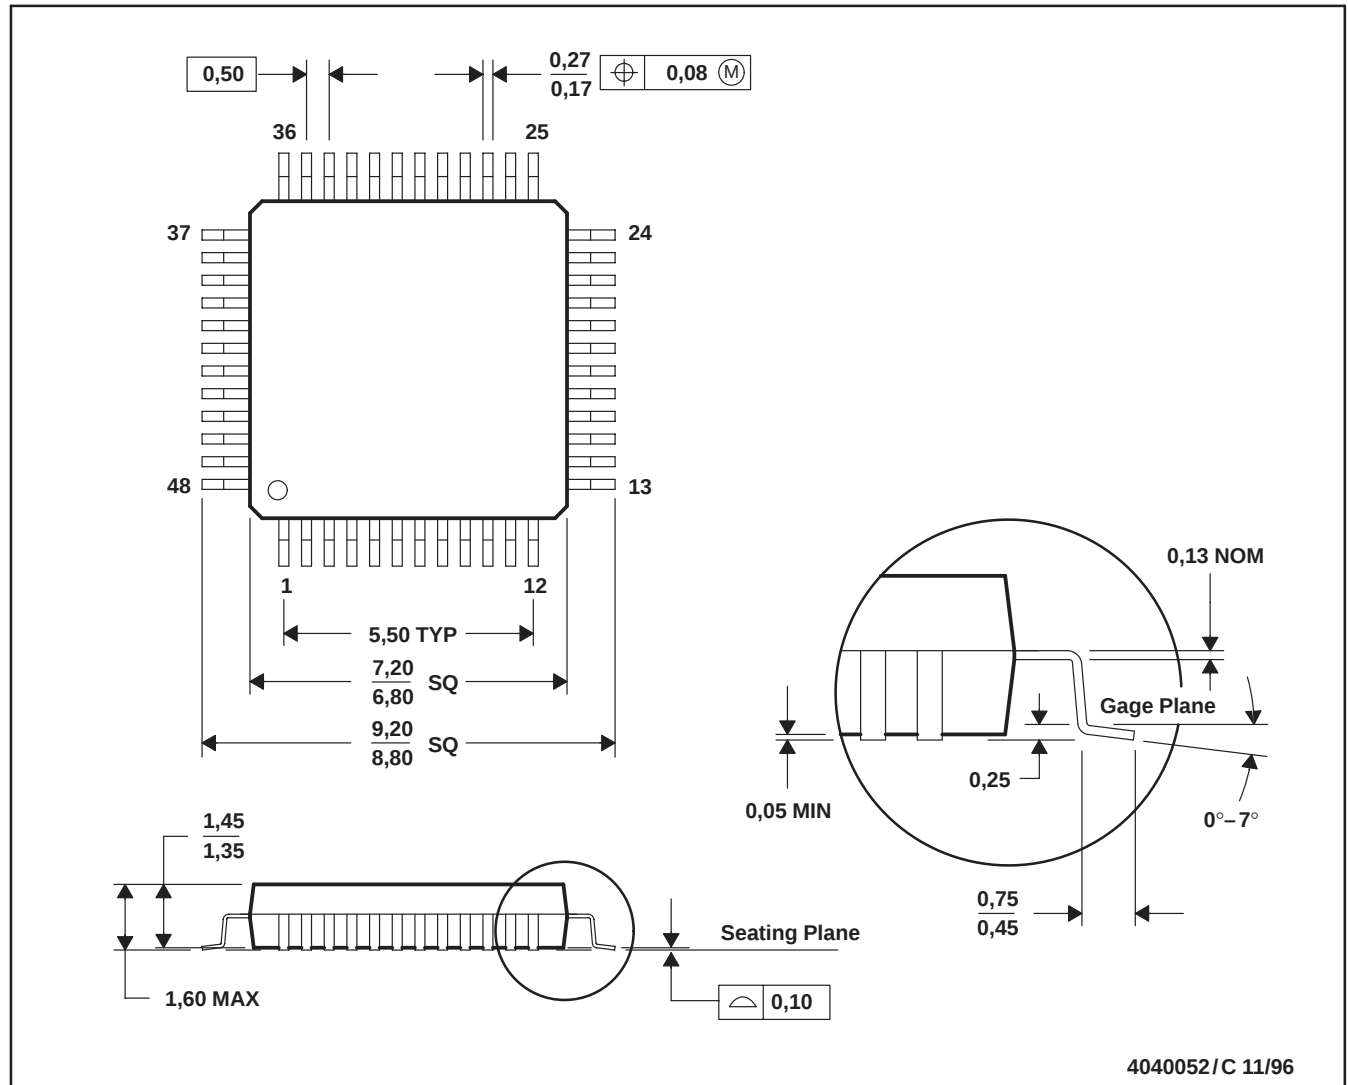

- NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Falls within JEDEC MS-026
 D. This may also be a thermally enhanced plastic package with leads connected to the die pads.

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
TUSB2040N	OBSOLETE	PDIP	N	28		TBD	Call TI	Call TI
TUSB2040PT	OBSOLETE	LQFP	PT	48		TBD	Call TI	Call TI

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS) or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
		Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2005, Texas Instruments Incorporated