
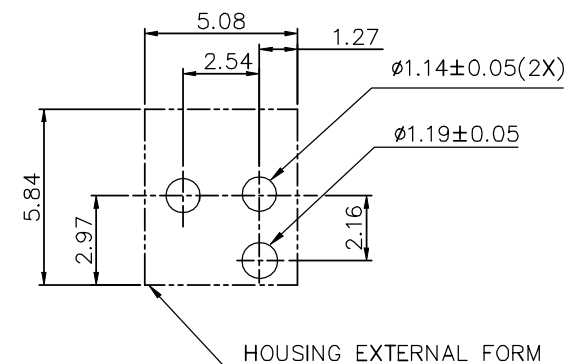

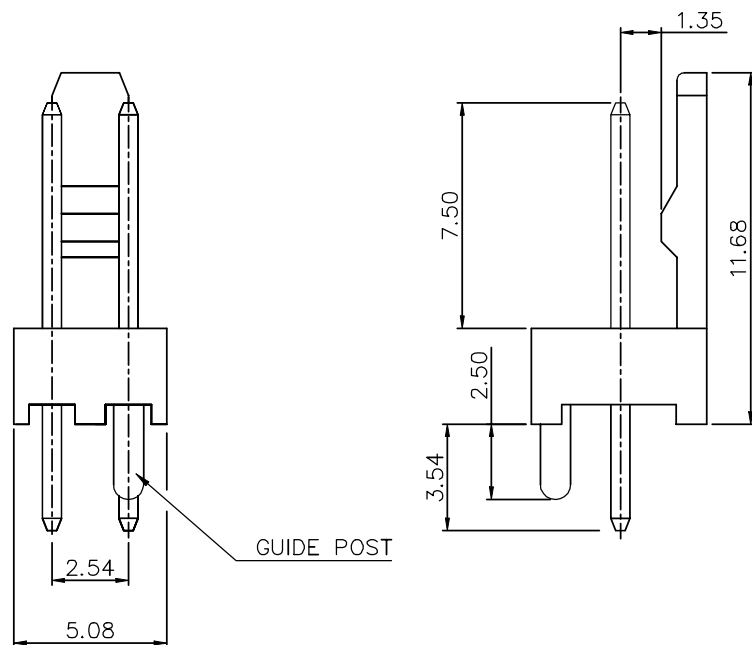


REV.	ECN. NO.	APPD.
A	BC06745106	Yusan 8/2'06

NOTES: (UNLESS OTHERWISE SPECIFIED)

1. DIMENSIONS SHALL BE INTERPRETED PER ANSI Y14.5M-1994.
 2. SPECIFICATIONS OF PRODUCT ARE SHOWN ON DRAWING "307-0300-1283".
 3. MATERIALS OF PARTS ARE SHOWN ON DRAWING "307-0500-1283".
 4. PRODUCT NO. MATRIX: SEE DRAWING "307-0500-1283".
 5. HARMFUL MATERIAL CONTROL PLEASE FOLLOW FOXCONN'S DOC. "EPI12".
 6. PLEASE CONTACT FOXCONN SALES REPRESENTATIVE TO VERIFY PRODUCT DETAIL & AVAILABILITY.
- △ THE "❏" LOGO IS APPROXED AS SHOWN.

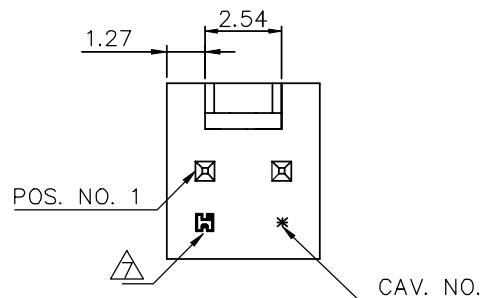


RECOMMENDED P.C.B. LAYOUT

X.±	X°.±	UNITS	mm	NAME(INTENDED USE)	FOXCONN				
.X±	.X°.±	MAT'L		FRICTION HEADER	HON HAI PRECISION IND. CO.,LTD. TAIPEI, TAIWAN, R.O.C.				
.XX± 0.20	.XX°.±	FINISH		PART NO.(INTENDED USE)	TITLE:				
.XXX±	.XXX°.±			HF2602*-***	CUSTOMER DRAWING VERTICAL,T/H,2.54mm PITCH				
APPD: Yusan 8/2'06				DWG NO.:					
Q'TY				307-0000-1283					
CHKD: Steven Huang									
DR: Nick Yu 8/2'06									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON HAI PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON HAI PRECISION IND. CO., LTD.						SCALE	SHEET	REV.	
						N/A	1/1	A	

DESC.	Q'TY	MATERIAL	TREATMENT	REMARK
CONTACT	SEE NOTES BELOW	COPPER ALLOY	A) 50u" MIN. NICKEL UNDER PLATING OVER ALL B) GOLD PLATING (SEE NOTES BELOW)	
HOUSING	1	HIGH TEMPERATURE, THERMOPLASTIC, GLASS FILLED, UL94 V-0	HOUSING COLOR (SEE NOTES BELOW)	

NOTES: (UNLESS OTHERWISE SPECIFIED)

- HARMFUL MATERIAL CONTROL PLEASE FOLLOW FOXCONN'S DOC. "EPI12".
- PLEASE CONTACT FOXCONN SALES REPRESENTATIVE TO VERIFY PRODUCT DETAIL & AVAILABILITY.
- PRODUCT NO. MATRIX:

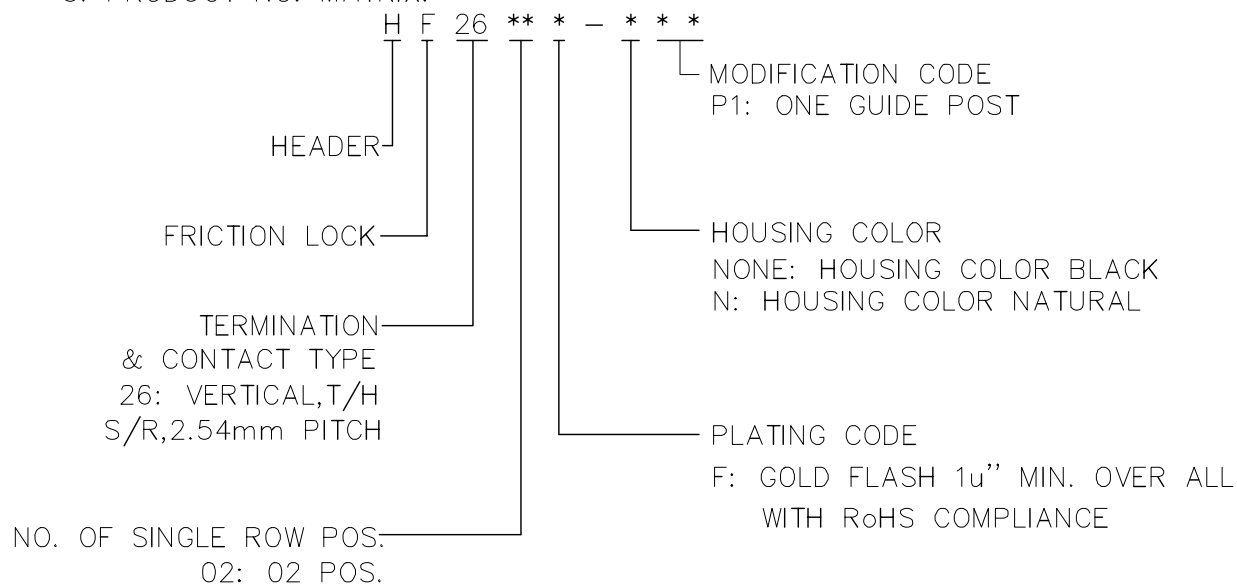

A	BC06745109	Yusan 8/2'06
REV.	ECN NO.	APPD.

FOXCONN HON HAI PRECISION IND. CO.,LTD. TAIPEI, TAIWAN, R.O.C.	
APPD. : Yusan 8/2'06	TITLE : MATERIAL SHEET T/H,S/R,VERTICAL,2.54mm PITCH
CHKD. : Steven Huang 8/2'06	PROD. SERIES : HF26 SERIES
DR. : Nick Yu 8/2'06	DWG. NO : 307-0500-1283
	REV. : A SHEET : 1/1

PRODUCT SPECIFICATIONS:

1. PHYSICAL:

- 1-1. HOUSING: HIGH TEMPERATURE, THERMOPLASTIC, GLASS FILLED, UL94V-0 RATING.
- 1-2. CONTACT: COPPER ALLOY, 50u" MIN. NICKEL UNDER PLATING OVER ALL; GOLD PLATING OVER NICKEL WITH RoHS COMPLIANCE.

2. ELECTRICAL CHARACTERISTICS:

- 2-1. CONTACT CURRENT RATING: 1 AMPERE PER POS..
- 2-2. DIELECTRIC WITHSTANDING VOLTAGE: 750V AC FOR 1 MINUTE AT SEA LEVEL.
- 2-3. INSULATION RESISTANCE: 1000 MEGAOHMS MIN..

3. MECHANICAL CHARACTERISTICS:

- 3-1. CONTACT RETENTION FORCE: 3 LBS(1.36Kgf) MIN. PER POS..

4. ENVIRONMENTAL DATA:

- 4-1. SOLDERABILITY: PASSED EIA-364-52.
- 4-2. OPERATION TEMPERATURE: -40°C TO +105°C.
- 4-3. HARMFUL MATERIAL CONTROL PLEASE FOLLOW FOXCONN'S DOC. "EPI12".

5. PLEASE CONTACT FOXCONN SALES REPRESENTATIVE TO VERIFY PRODUCT DETAIL & AVAILABILITY.

A	BC06745113	Yusan 8/2'06
REV.	ECN NO.	APPD.

FOXCONN HON HAI PRECISION IND. CO.,LTD. TAIPEI, TAIWAN, R.O.C.	
APPD. : Yusan 8/2'06	TITLE : SPECIFICATION T/H,S/R,VERTICAL,2.54mm PITCH
CHKD. : Steven Huang 8/2'06	PROD. SERIES : HF26 SERIES
DR. : Nick Yu 8/2'06	DWG. NO : 307-0300-1283
	REV. : A SHEET : 1/1