


POWER TRANSFORMERS

PC MOUNT - SPLIT PACK™

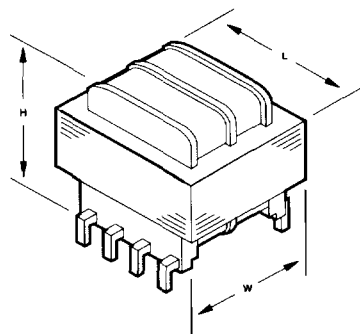

DESCRIPTION: The TRIAD Split Pack split bobbin transformer from MagneTek is an extremely versatile tool for PC board applications. Split Pack transformers are nonconcentrically wound - with primaries and secondaries side-by-side. Unlike the secondary-on-top-of-primary designs of standard PC board transformers, the split bobbin winding and low capacitive coupling eliminate costly electrostatic shielding. It is offered in a dual secondary configuration with either single or dual primaries.

SPECIFICATIONS:

Primary: 115/230 V, 50/60 Hz
 VA Ranges: 1.1 to 36.0
 Secondary: Series - 10 to 120 V
 Parallel - 5 to 60 V

Class B
 UL Recognized



UL File E53148

Split Pack

21

Section	Primary 8 Pin	Primary 8 Pin	VA	Secondary		Dimensions							Wt. Lbs.
				Series	Parallel	H	W	L	ML	A	S	C	
A	F10-110	FS10-110	1.1	10.0V CT @ 0.11A	5.0V @ 0.22A	1 ⁵ / ₁₆	1 ¹ / ₈	1 ³ / ₈	-	0.250	0.250	1.20	0.17
	F12-090	FS12-090		12.6V CT @ 0.09A	6.3V @ 0.18A								
	F16-070	FS16-070		16.0V CT @ 0.07A	8.0V @ 0.14A								
	F20-055	FS20-055		20.0V CT @ 0.055A	10.0V @ 0.11A								
	F24-045	FS24-045		24.0V CT @ 0.045A	12.0V @ 0.09A								
	F28-040	FS28-040		28.0V CT @ 0.04A	14.0V @ 0.08A								
	F36-030	FS36-030		36.0V CT @ 0.03A	18.0V @ 0.06A								
	F48-023	FS48-023		48.0V CT @ 0.023A	24.0V @ 0.046A								
	F56-020	FS56-020		56.0V CT @ 0.02A	28.0V @ 0.04A								
	F120-010	FS120-01		120.0V CT @ 0.01A	60.0V @ 0.02A								
B	F10-250	FS10-250	2.5	10.0V CT @ 0.25A	5.0V @ 0.5A	1 ⁵ / ₁₆	1 ¹ / ₈	1 ³ / ₈	-	0.250	0.250	1.20	0.25
	F12-200	FS12-200		12.6V CT @ 0.2A	6.3V @ 0.4A								
	F16-150	FS16-150		16.0V CT @ 0.15A	8.0V @ 0.3A								
	F20-120	FS20-120		20.0V CT @ 0.12A	10.0V @ 0.24A								
	F24-100	FS24-100		24.0V CT @ 0.1A	12.0V @ 0.2A								
	F28-85	FS28-85		28.0V CT @ 0.085A	14.0V @ 0.17A								
	F36-65	FS36-65		36.0V CT @ 0.065A	18.0V @ 0.13A								
	F48-050	FS48-050		48.0V CT @ 0.05A	24.0V @ 0.1A								
	F56-045	FS56-045		56.0V CT @ 0.045A	28.0V @ 0.09A								
	F120-020	FS120-02		120.0V CT @ 0.02A	60.0V @ 0.04A								
C	F10-600	FS10-600	6.0	10.0V CT @ 0.6A	5.0V @ 1.2A	1 ⁵ / ₁₆	1 ⁵ / ₁₆	1 ⁵ / ₈	1 ¹ / ₁₆	0.250	0.350	1.280	0.44
	F12-500	FS12-500		12.6V CT @ 0.5A	6.3V @ 1.0A								
	F16-400	FS16-400		16.0V CT @ 0.4A	8.0V @ 0.8A								
	F20-300	FS20-300		20.0V CT @ 0.3A	10.0V @ 0.6A								
	F24-250	FS24-250		24.0V CT @ 0.25A	12.0V @ 0.5A								
	F28-200	FS28-200		28.0V CT @ 0.2A	14.0V @ 0.4A								
	F36-170	FS36-170		36.0V CT @ 0.17A	18.0V @ 0.34A								
	F48-125	FS48-125		48.0V CT @ 0.125A	24.0V @ 0.25A								
	F56-110	FS56-110		56.0V CT @ 0.11A	28.0V @ 0.22A								
	F120-050	FS120-05		120.0V CT @ 0.05A	60.0V @ 0.1A								
D	F10-1200	FS10-1200	12.0	10.0V CT @ 1.2A	5.0V @ 2.4A	1 ⁵ / ₁₆	1 ⁵ / ₁₆	1 ⁷ / ₈	1 ¹ / ₄	0.30	0.40	1.410	0.70
	F12-1000	FS12-1000		12.6V CT @ 1.0A	6.3V @ 2.0A								
	F16-800	FS16-800		16.0V CT @ 0.8A	8.0V @ 1.6A								
	F20-600	FS20-600		20.0V CT @ 0.6A	10.0V @ 1.2A								
	F24-500	FS24-500		24.0V CT @ 0.5A	12.0V @ 1.0A								
	F28-420	FS28-420		28.0V CT @ 0.42A	14.0V @ 0.84A								
	F36-350	FS36-350		36.0V CT @ 0.35A	18.0V @ 0.7A								
	F48-250	FS48-250		48.0V CT @ 0.25A	24.0V @ 0.5A								
	F56-220	FS56-220		56.0V CT @ 0.22A	28.0V @ 0.44A								
	F120-100	FS120-100		120.0V CT @ 0.1A	60.0V @ 0.2A								
E	F10-2000	FS10-2000	20.0	10.0V CT @ 2.0A	5.0V @ 4.0A	1 ⁵ / ₁₆	1 ⁷ / ₈	2 ¹ / ₄	1 ¹ / ₂	0.30	0.40	1.60	0.80
	F12-1600	FS12-1600		12.6V CT @ 1.6A	6.3V @ 3.2A								
	F16-1250	FS16-1250		16.0V CT @ 1.25A	8.0V @ 2.5A								
	F20-1000	FS20-1000		20.0V CT @ 1.0A	10.0V @ 2.0A								
	F24-800	FS24-800		24.0V CT @ 0.8A	12.0V @ 1.6A								
	F28-700	FS28-700		28.0V CT @ 0.7A	14.0V @ 1.4A								
	F36-550	FS36-550		36.0V CT @ 0.55A	18.0V @ 1.1A								
	F48-400	FS48-400		48.0V CT @ 0.4A	24.0V @ 0.8A								
	F56-350	FS56-350		56.0V CT @ 0.35A	28.0V @ 0.7A								
	F120-160	FS120-160		120.0V CT @ 0.16A	60.0V @ 0.32A								

CT = Center Tap



112 East Union Street • Goodland, Indiana 47948 • 24 Hour Fast Fax 800/795-7020 • Fax 219/297-3554 • Tele. 219/297-3111

POWER TRANSFORMERS

PC MOUNT - SPLIT PACK™



Section	Single Primary 6 Pin	Dual Primary 8 Pin	VA	Secondary		Dimensions							Wt. Lbs.
				Series	Parallel	H	W	L	ML	A	B	C	
A	F10-3600	FS10-3600	36.0	10.0V CT @ 3.6A	5.0V @ 7.2A	1 1/16	2 1/16	2 7/8	*	0.40	0.40	1.850	1.1
	F12-2850	FS12-2850		12.6V CT @ 2.85A	6.3V @ 5.7A								
	F16-2250	FS16-2250		16.0V CT @ 2.25A	8.0V @ 4.5A								
	F20-1800	FS20-1800		20.0V CT @ 1.8A	10.0V @ 3.6A								
	F24-1500	FS24-1500		24.0V CT @ 1.5A	12.0V @ 3.0A								
	F28-1300	FS28-1300		28.0V CT @ 1.3A	14.0V @ 2.6A								
	F36-1000	FS36-1000		36.0V CT @ 1.0A	18.0V @ 2.0A								
	F48-750	FS48-750		48.0V CT @ 0.75A	24.0V @ 1.5A								
	F56-650	FS56-650		56.0V CT @ 0.65A	28.0V @ 1.3A								
	F120-300	FS120-300		120.0V CT @ 0.3A	60.0V @ 0.6A								

* 36 VA size has 4 mtg. holes on 2 3/16 x 1 3/4 centers. CT = Center Tap

22

TECHNICAL NOTES:

1. Hi-pot tested at 2,500 VRMS.

2. PC terminal pin spacing for accurate placement.

3. **Series Connection 230 V:**

Primary: Input 1 & 4
Connect 2 & 3
Secondary: Output 5 & 8
Connect 6 & 7

4. **Parallel Connection 115 V:**

Primary: Input 1 & 2
Connect 1 & 3, 2 & 4
Secondary: Output 5 & 6
Connect 5 & 7, 6 & 8

