



The following document contains information on Cypress products. Although the document is marked with the name "Spansion" and "Fujitsu", the company that originally developed the specification, Cypress will continue to offer these products to new and existing customers.

Continuity of Specifications

There is no change to this document as a result of offering the device as a Cypress product. Any changes that have been made are the result of normal document improvements and are noted in the document history page, where supported. Future revisions will occur when appropriate, and changes will be noted in a document history page.

Continuity of Ordering Part Numbers

Cypress continues to support existing part numbers. To order these products, please use only the Ordering Part Numbers listed in this document.

For More Information

Please contact your local sales office for additional information about Cypress products and solutions.

About Cypress

Cypress (NASDAQ: CY) delivers high-performance, high-quality solutions at the heart of today's most advanced embedded systems, from automotive, industrial and networking platforms to highly interactive consumer and mobile devices. With a broad, differentiated product portfolio that includes NOR flash memories, F-RAM™ and SRAM, Traveo™ microcontrollers, the industry's only PSoC® programmable system-on-chip solutions, analog and PMIC Power Management ICs, CapSense® capacitive touch-sensing controllers, and Wireless BLE Bluetooth® Low-Energy and USB connectivity solutions, Cypress is committed to providing its customers worldwide with consistent innovation, best-in-class support and exceptional system value.

ASSP For Power Management Applications

Power Management Switch IC

MB3841

■ DESCRIPTION

The FUJITSU MICROELECTRONICS MB3841 is a one-channel power management switch IC with extremely low on resistance.


The MB3841 is designed for a variety of switching applications, featuring operation from low input voltages ($V_{IN} > 2.2\text{ V}$) and stable on resistance that does not depend on input voltages. The switch current limit can be externally set over a wide range from 100 mA to 2 A. A safety function detects overcurrent conditions, immediately sets the switch to off mode and sends an external notification signal. The MB3841 is therefore ideal for power management switching applications with USB specifications.

In addition, the MB3841 has features that ensure accurate on-off switching by preventing reverse current in off mode, as well as rapid discharge of capacitors connected to output.

■ FEATURES

- Low on resistance switch (Typ. 45 m Ω)
- Low input voltage operation (2.2 V to 5.5 V)
- Switch current (Max. 2 A)
- UVLO ($V_{TH} = 1.9\text{ V}$)
- External settings for soft start time and switch current limit
- On-chip over temperature detection (the switch turns off and set the latch), over current detection (the switch turns off and set the latch)
- On-chip abnormal state detection circuit (O.C. pin)
- On-chip output pin discharge control circuit
- Supply current = 0 μA in standby mode (CONTROL < 0.8 V)
- Reverse current protection function in off mode


■ PIN ASSIGNMENT

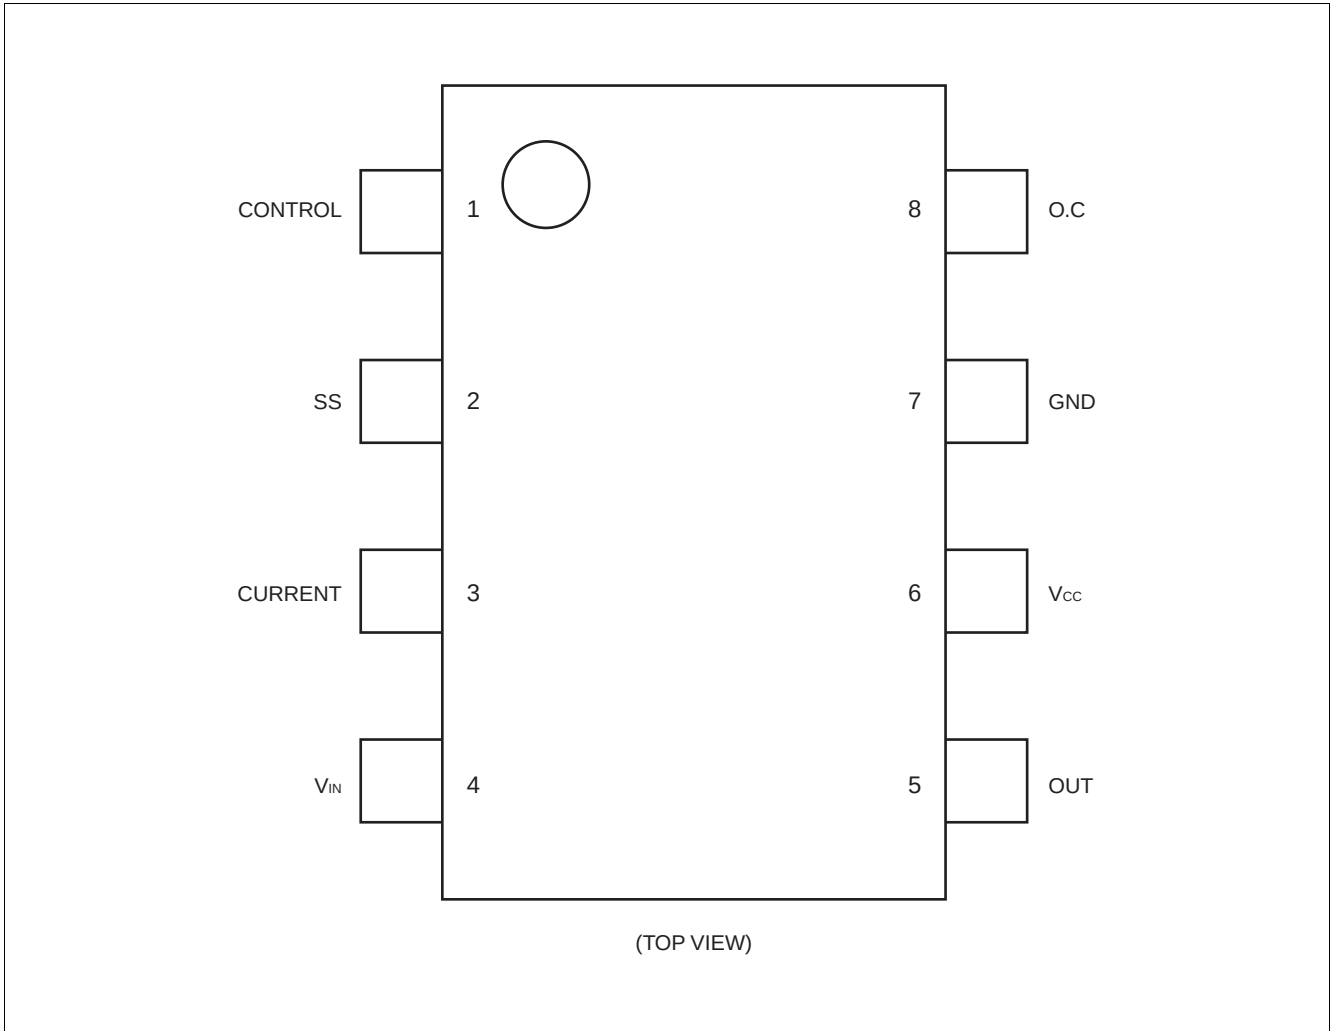

■ PIN DESCRIPTION

Pin no.	Symbol	Descriptions
1	CONTROL	Control signal input pin. Set "H" to turn the switch on, "L" to turn the switch off. At 0.8 V or less, the chip is in STBY state and current consumption is less than 1 μ A.
2	SS	Slow start setting pin. Used to adjust the switch on/off timing. Add external capacitance to delay operation. Leave open when not in use. In open mode voltages up to 10 V are present. Care should be taken in mounting to prevent leak current generation because high impedance is required.
3	CURRENT	Current limit setting pin. The limit current level is set by connecting this pin to external resistance. If this pin is connected to GND, no current limit is applied.
4	V _{IN}	Switch input pin. The V _{IN} voltage monitoring function enables switch operation at 1.9 V or higher. If the V _{IN} voltage drops to 1.8 V or lower switch operation is disabled.
5	OUT	Switch output pin. The discharge function will immediately discharge the capacitance charge connected to the OUT pin when the switch is in off position and 350 Ω resistance (with V _{CC} = 5 V) is connected to the GND terminal.
6	V _{CC}	Control power supply input pin. This pin supplies power to the control circuit. The input voltage level must be stable.
7	GND	Ground pin.
8	O.C	External signal pin. When the switch is in on mode this pin normally outputs a "H" level signal, but changes to "L" level when an overcurrent, overheating, or UVLO condition is detected. When the switch is in off mode this signal is output at "L" level at all times. This is an open drain output, and should be pulled up to high potential using resistance.

■ BLOCK DIAGRAM

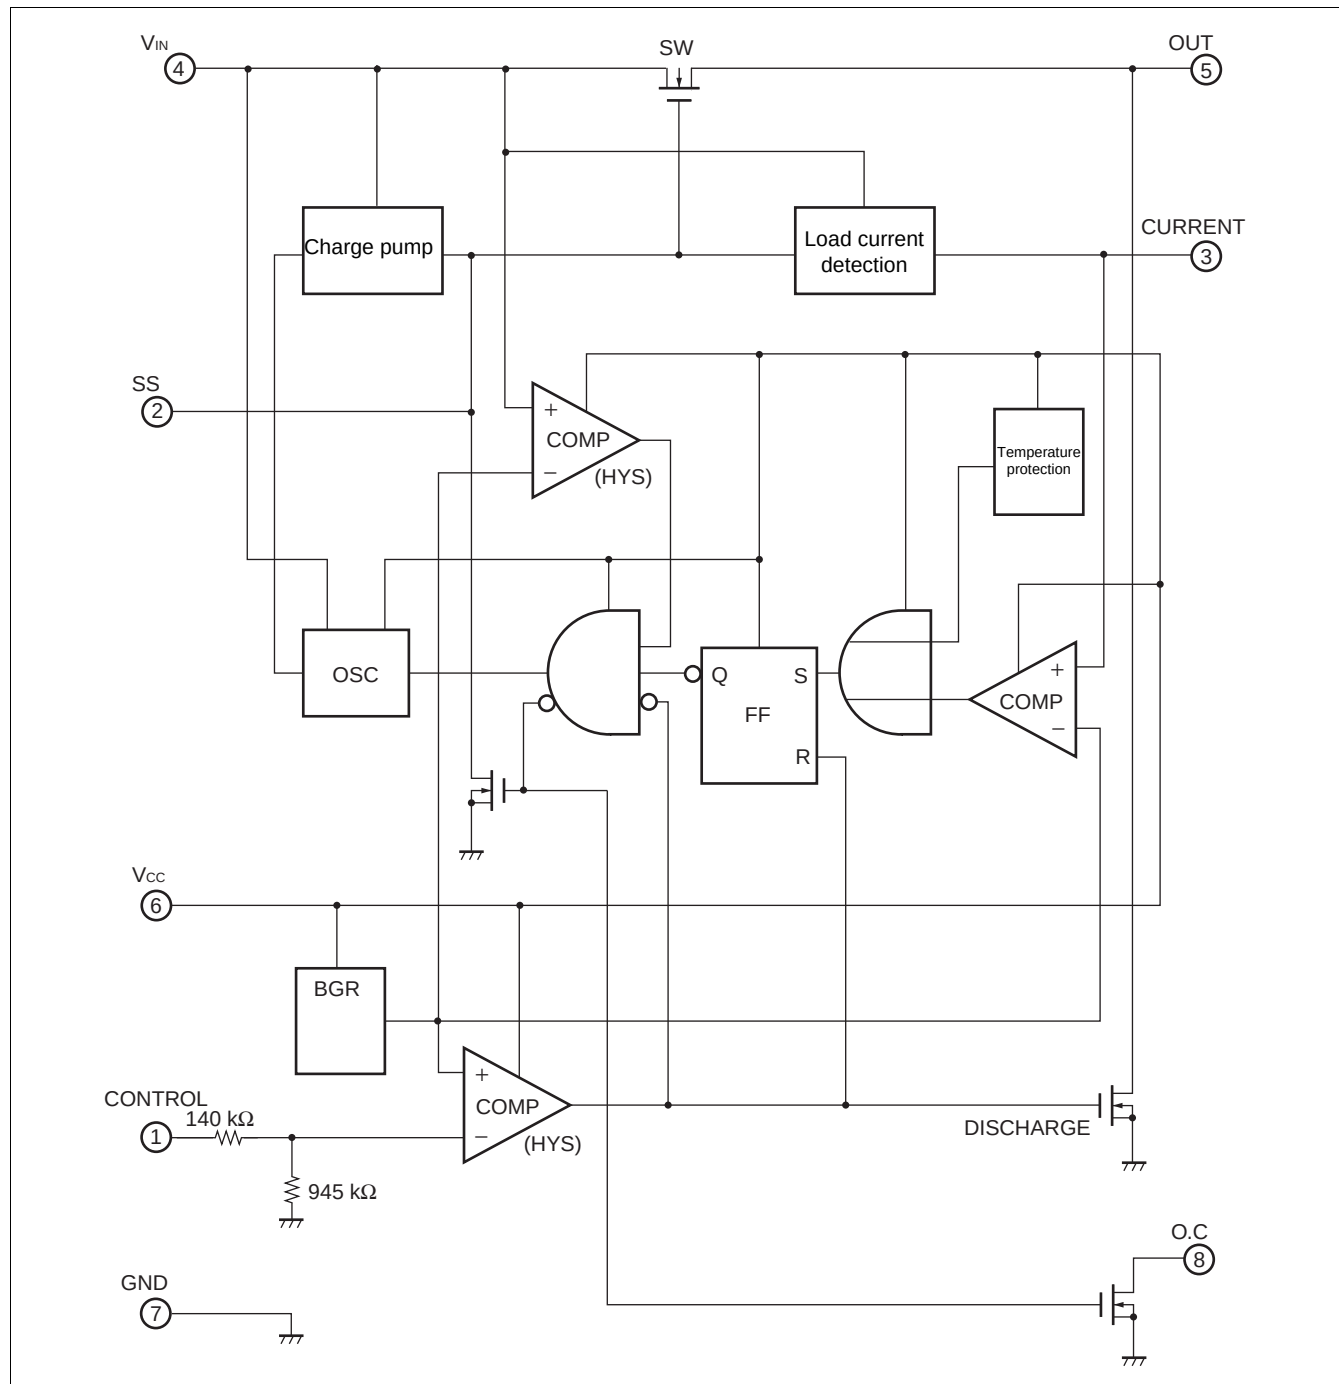

■ ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Condition	Rating		Unit
			Min.	Max.	
Input voltage	V_{IN}	—	−0.3	7.0	V
Power supply voltage	V_{CC}	—	−0.3	7.0	V
Control voltage	V_{CTL}	—	−0.3	7.0	V
Switch current	I_{SW}	$V_{IN} = 2.2 \text{ V to } 5.5 \text{ V}$	—	3 (DC)	A
			—	6 ($t \leq 10 \text{ ms}$)	
Allowable dissipation	P_D	$T_a = +85^\circ\text{C}$	—	280	mW
Storage temperature	T_{STG}	—	−55	+125	$^\circ\text{C}$

WARNING: Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

■ RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Condition	Value			Unit
			Min.	Typ.	Max.	
Input voltage	V_{IN}	—	0	—	5.5	V
Power supply voltage	V_{CC}	—	0	—	5.5	V
Control voltage	V_{CTL}	$V_{CTL} \leq V_{CC}$	0	—	5.5	V
Switch current	I_{SW}	$V_{IN} = 2.2 \text{ V to } 5.5 \text{ V},$ $V_{CTL} = 2.2 \text{ V to } 5.5 \text{ V}$	—	—	2.0	A
SS pin capacitance	C_{SS}	—	—	—	10	nF
Current limit resistance	R_{LIM}	$V_{IN} = 5.0 \text{ V } (I_{SW} = 2 \text{ A to } 0.1 \text{ A})$	1.8 k	—	24 k	Ω
		$V_{IN} = 2.2 \text{ V } (I_{SW} = 2 \text{ A to } 0.1 \text{ A})$	2.2 k	—	51 k	Ω
O.C sync current	I_{OC}	$V_{IN} = 2.2 \text{ V to } 5.5 \text{ V}, V_{CC} \geq 2.2 \text{ V}$	—	—	1.0	mA
Operating ambient temperature	T_a	—	−20	—	+85	$^\circ\text{C}$

Note: For C_{SS} , R_{LIM} settings, see p. 9.

WARNING: The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their representatives beforehand.


■ ELECTRICAL CHARACTERISTICS

($V_{IN} = 5\text{ V}$, $V_{CC} = 5\text{ V}$, $T_a = +25^\circ\text{C}$)


Parameter	Symbol	Condition		Value			Unit
				Min.	Typ.	Max.	
Switch resistance	R _{ON}	V _{IN} = 5 V, V _{CTL} = 3 V, I _{SW} = 2 A		—	45	70	mΩ
IN pin disable current	I _{IN1}	V _{IN} = 5 V, V _{CTL} = 3 V, I _{SW} = 0 A		—	170	340	μA
	I _{IN2}	V _{IN} = 5 V, V _{CTL} = 3 V, I _{SW} = 2 A		—	0.9	1.8	mA
	I _{IN3}	V _{IN} = 5 V, V _{CTL} = 0.4 V		—	—	1.0	μA
V _{CC} power supply current	I _{CC1}	V _{IN} = 5 V, V _{CTL} = 3 V, I _{SW} = 2 A		—	105	210	μA
	I _{CC2}	V _{IN} = 5 V, V _{CTL} = 0.4 V		—	—	1.0	μA
UVLO threshold	V _{IUH}	V _{CC} = 5 V, V _{IN} at O.C. = L → H		1.7	1.9	2.1	V
	V _{IUL}	V _{CC} = 5 V, V _{IN} at O.C. = H → L		1.6	1.8	2.0	V
UVLO hysteresis width	V _{IUHY}	V _{IUHY} = V _{IUH} – V _{IUL}		50	100	150	mV
CONTROL pin input current	I _{CTL}	V _{CTL} = 5 V, I _{SW} = 0 A		—	5.0	10	μA
CONTROL pin threshold	V _{THCTL}	V _{CC} = 2.2 V, V _{CTL} at O.C. = L → H		1.2	1.35	1.5	V
	V _{TLCTL}	V _{CC} = 2.2 V, V _{CTL} at O.C. = H → L		1.0	1.15	1.3	V
CONTROL pin hysteresis width	V _{CTLHY}	V _{CTLHY} = V _{THCTL} – V _{TLCTL}		100	200	300	mV
Switch current limit value	I _{SWLL1}	V _{IN} = 5 V	R _{LIM} = 24 kΩ, V _{CTL} = 2.2 V	73	105	137	mA
	R _{LIM} = 1.8 kΩ, V _{CTL} = 2.2 V		1.57	1.97	2.37	A	
	I _{SWLL2}	V _{IN} = 2.2 V	R _{LIM} = 51 kΩ, V _{CTL} = 2.2 V	68	98	128	mA
	I _{SWLH2}		R _{LIM} = 2.2 kΩ, V _{CTL} = 2.2 V	1.53	1.92	2.31	A
O.C sync current	I _{OCS}	V _{CC} = 5 V, V _{CTL} = 0.8 V, V _{OC} = 0.4 V		1.0	4.5	—	mA
O.C leak current	I _{OCL}	V _{CC} = 5 V, V _{CTL} = 3 V, V _{OC} = 5.0 V		—	—	2.0	μA
Switch discharge resistance	R _{DCG}	V _{CC} = 5 V, V _{CTL} = 0.8 V, V _{OUT} = 5.0 V		—	350	700	Ω
Temperature protection (T _i)	T _{LIM}	V _{CC} = 5 V, V _{CTL} = 2.2 V		+125	—	—	°C
OUT pin rise time	t _{ON1}	V _{CC} = 5 V, V _{IN} = 5 V, SS, OUT: Open		—	300	900	μs
	t _{ON2}	V _{CC} = 5 V, V _{IN} = 2.2 V, SS, OUT: Open		—	610	1830	μs
OUT pin fall time	t _{OFF1}	V _{IN} = 5 V, V _{CC} = 5 V, SS, OUT: Open		—	10	50	μs
	t _{OFF2}	V _{IN} = 5 V, V _{CC} = 2.2 V, SS, OUT: Open		—	50	250	μs

■ DIAGRAM


1. Normal operation

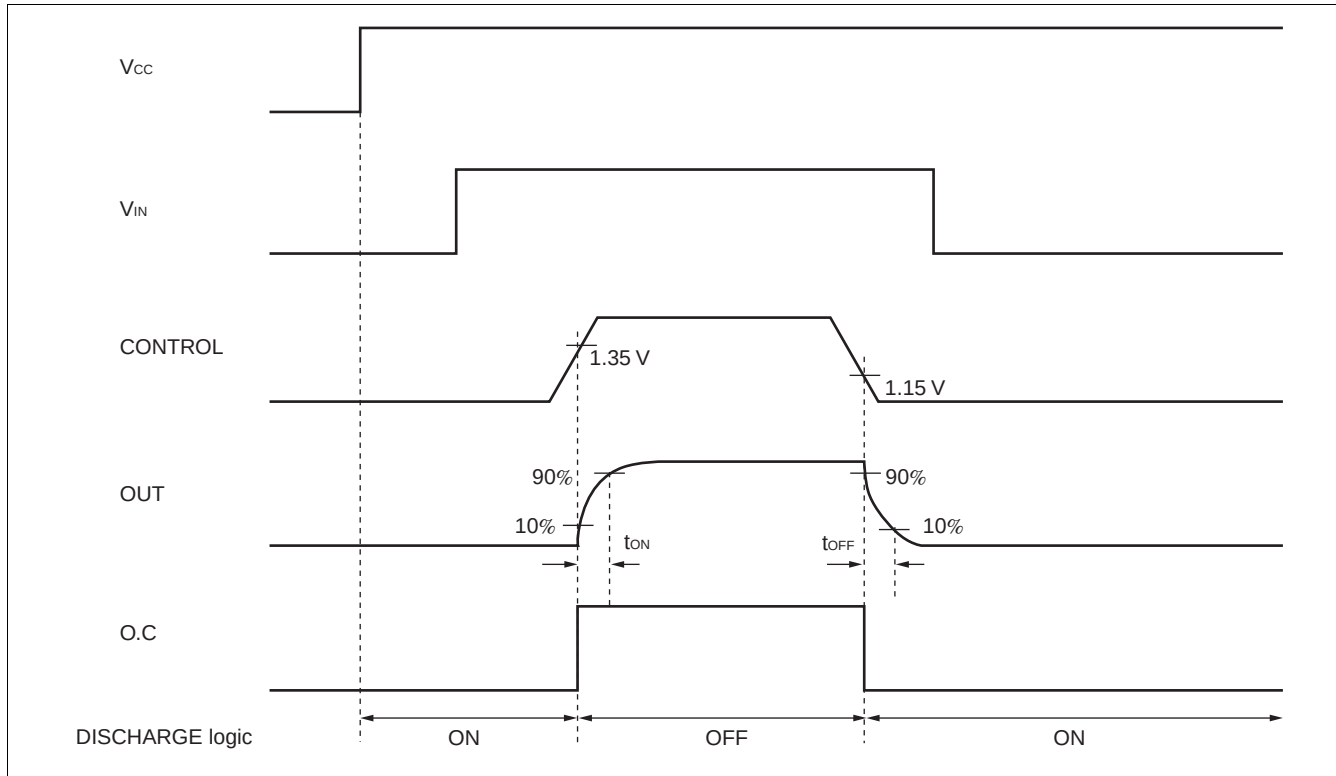

2. At V_{IN} Fall

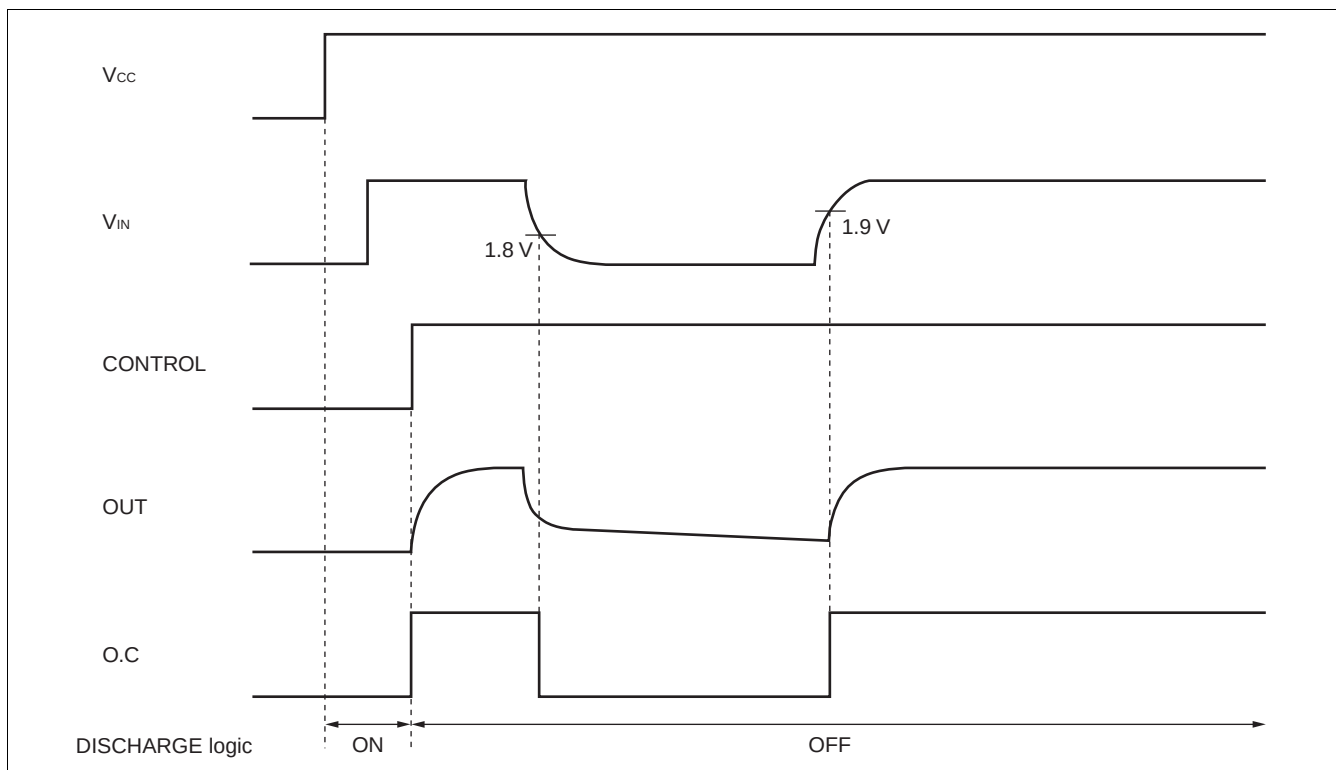


3. At V_{OUT} short

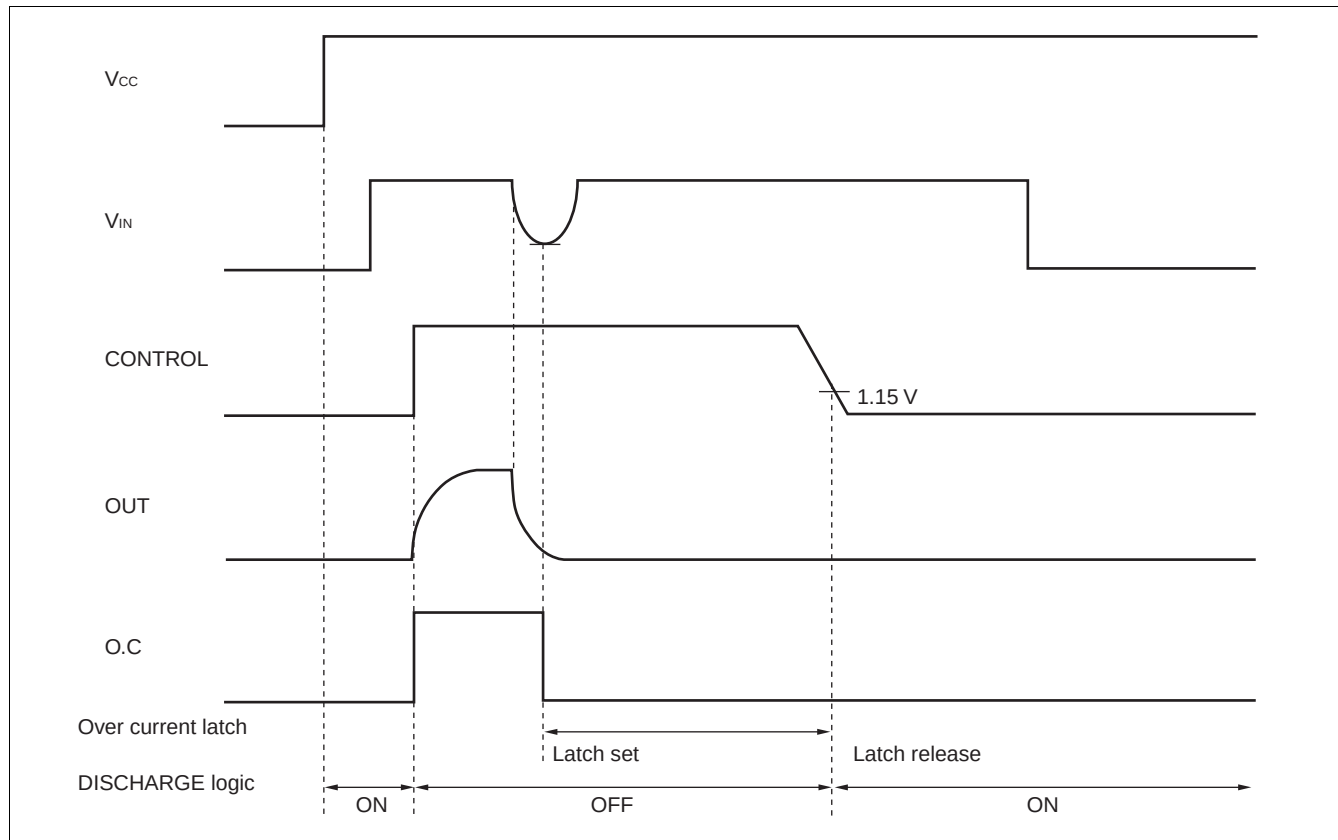


■ TYPICAL CHARACTERISTICS

1. R_{LIM} vs. I_{SW} Characteristics

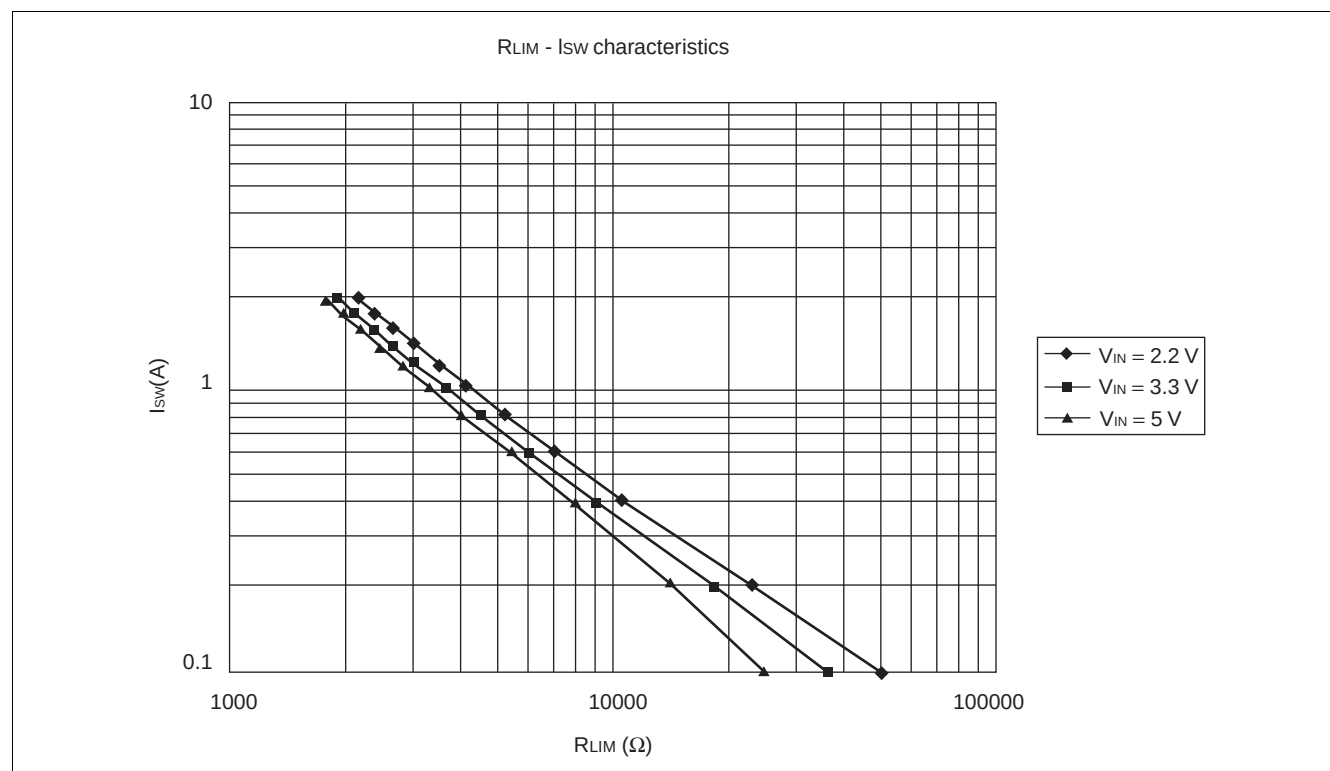


2. C_{SS} vs. t_{ON} (SS) Characteristics

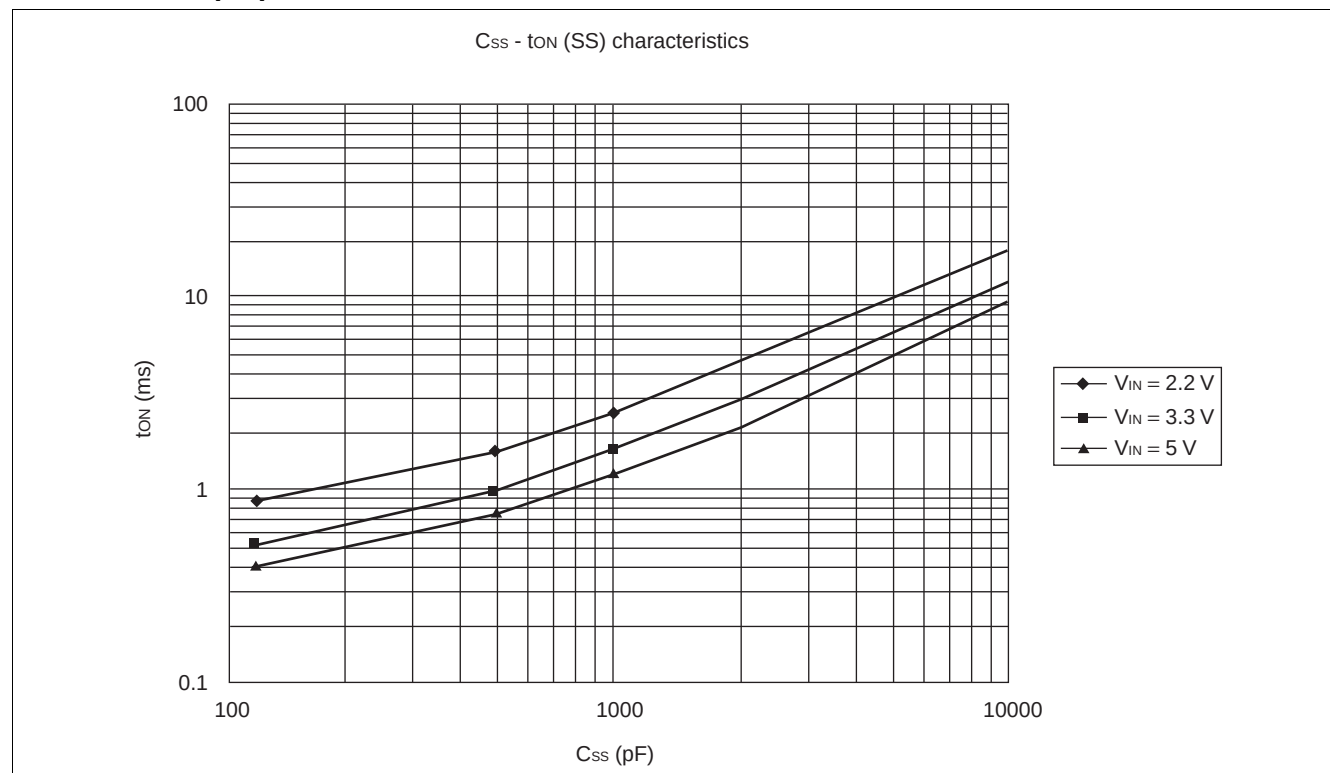


3. SW Resistance Temperature Characteristics

Temperature dependency of SW resistance ($V_{IN} = 5\text{ V}$, $I_{OUT} = 2\text{ A}$, T_a : Ambient temperature)

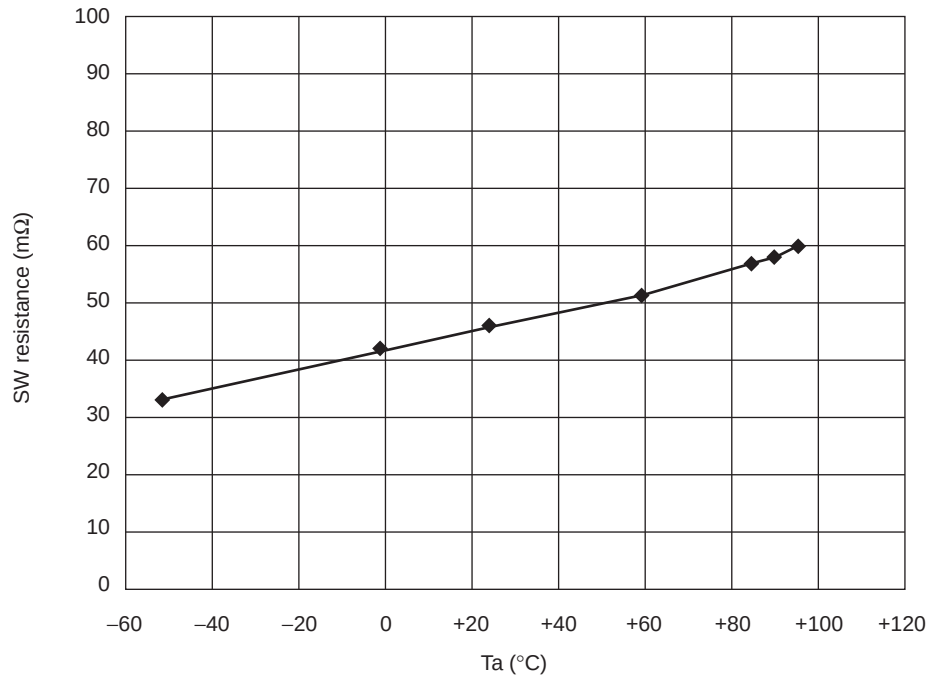

V_{IN} voltage dependency of SW resistance ($I_{OUT} = 2\text{ A}$, $T_a = -40, +25, +100^\circ\text{C}$)

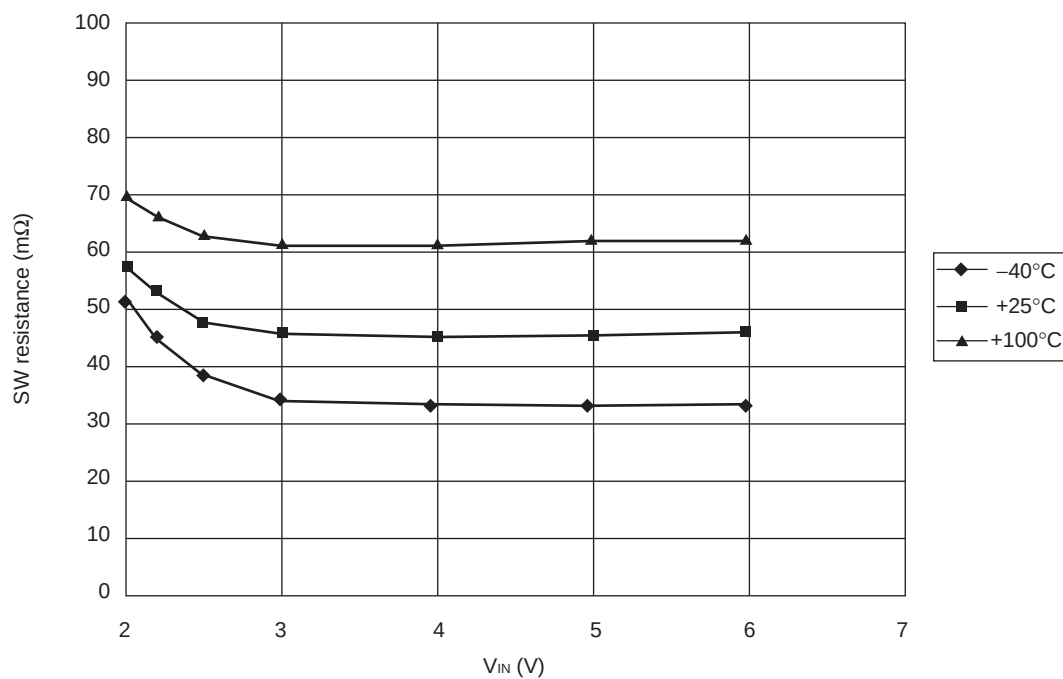

■ FUNCTIONAL DESCRIPTION

Current Limit Setting

The MB3841 provides highly accurate switching current limit setting, in the range from 100 mA to 2 A by placing resistance between the CURRENT and GND pins.

The accuracy of $\pm 20\%$ can be secured by switching current of 2 A setting.

Because the setting is dependent on the V_{IN} voltage, it is important that the appropriate resistance be connected to the V_{IN} pin.

See “ R_{LIM} vs. I_{SW} Characteristics” on p. 9 and “■ OUTPUT CURRENT LIMITATION SETTING ” of the table.

The following approximation formula may be used to calculate the limit setting when $V_{IN} = 5V$.

$$I_{SW} = \frac{7450}{(R_{LIM}[\Omega])^{1.1}} [A]$$

When the switch limit level is exceeded, the switch turns off and then latch is set to protect the device.

At the same time the O.C output signal goes to “L” level to notify external systems.

When a “L” level signal is applied to the CONTROL switch, the latch is released, so that the normal operation is resumed at the next “H” level signal to the CONTROL switch.

Thermal Shutdown

The MB3841 has a thermal shutdown function which turns the switch off and sets the latch to protect the device when junction temperature exceeds 125°C.

At the same time the O.C output signal goes to “L” level to notify external systems.

When a “L” level signal is applied to the CONTROL switch, the latch is released,so that the normal operation is resumed at the next “H” level signal to the CONTROL switch.

Slow Start

The on/off switching time of the MB3841 can be delayed by applying capacitance between the SS and GND pins. Controlling the on time can soften the surge current to the load side capacitance when power is turned on. (t_{ON} , t_{OFF} are measured at 90% of V_{OUT} .)

For details, see “ C_{SS} vs. t_{ON} (SS) Characteristics” on p. 9.

The following approximation formula may be used to set on time when $V_{IN} = 5 V$.

$$t_{ON} = 0.87 \times 10^{-3} \times C_{SS} [pF] + 0.3 [ms]$$


DISCHARGE

The MB3841 has a DISCHARGE pin function that immediately discharges electric charge on the load side when the switch is turned off.

■ OUTPUT CURRENT LIMITATION SETTING R_{LIM} [Ω]


$V_{IN} \backslash I_{SW}$	0.1 A	0.2 A	0.4 A	0.8 A	1.0 A	1.2 A	1.4 A	1.6 A	1.8 A	2.0 A	2.5 A	3.0 A
5.0 V	24.0 k	14.3 k	7.68 k	4.02 k	3.30 k	2.80 k	2.43 k	2.15 k	1.96 k	1.80 k	1.47 k	1.24 k
3.3 V	36.5 k	18.2 k	8.87 k	4.42 k	3.60 k	3.00 k	2.61 k	2.32 k	2.05 k	1.91 k	1.54 k	1.30 k
2.2 V	51.0 k	23.2 k	10.7 k	5.23 k	4.12 k	3.48 k	3.00 k	2.61 k	2.32 k	2.20 k	1.65 k	1.37 k

■ TYPICAL APPLICATION

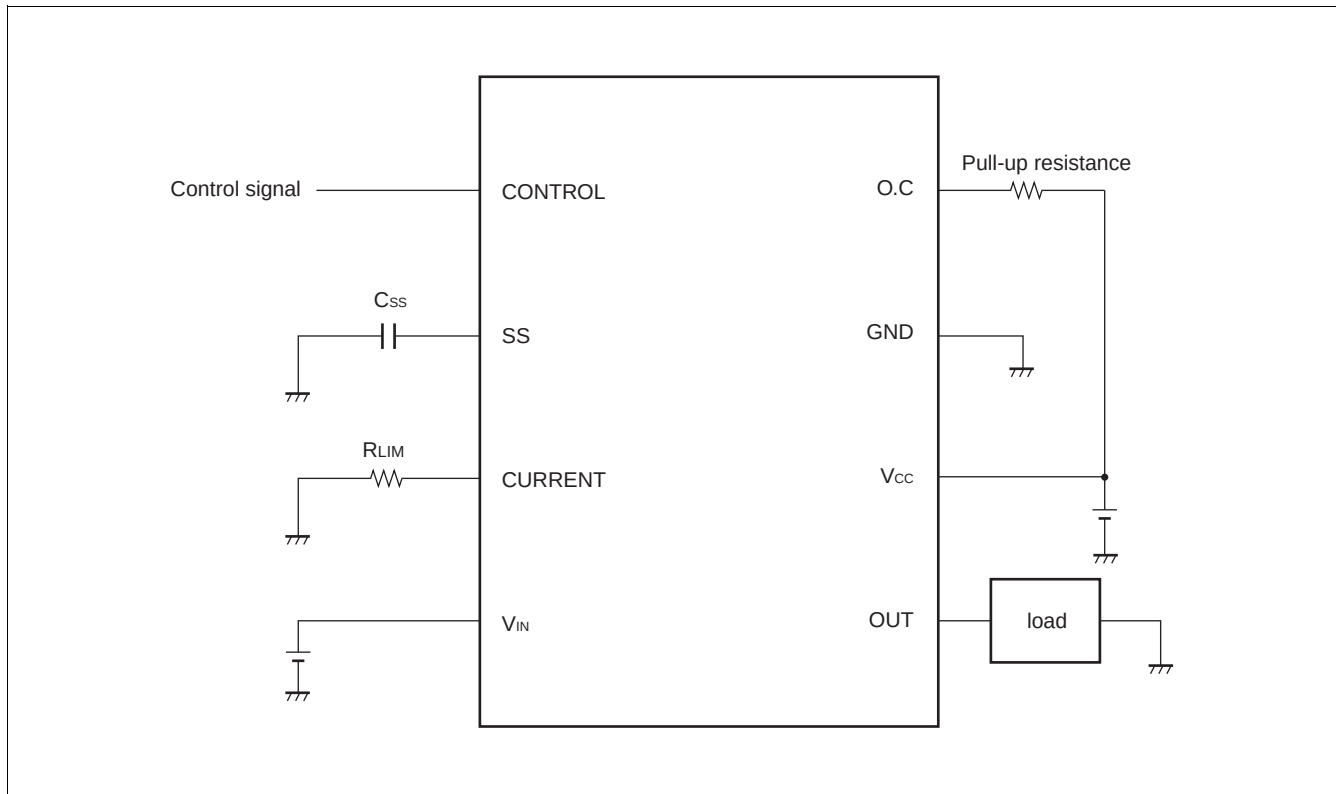


■ SAMPLE APPLICATIONS

(1) Bus Supplied Hub (GANG Mode Connection)

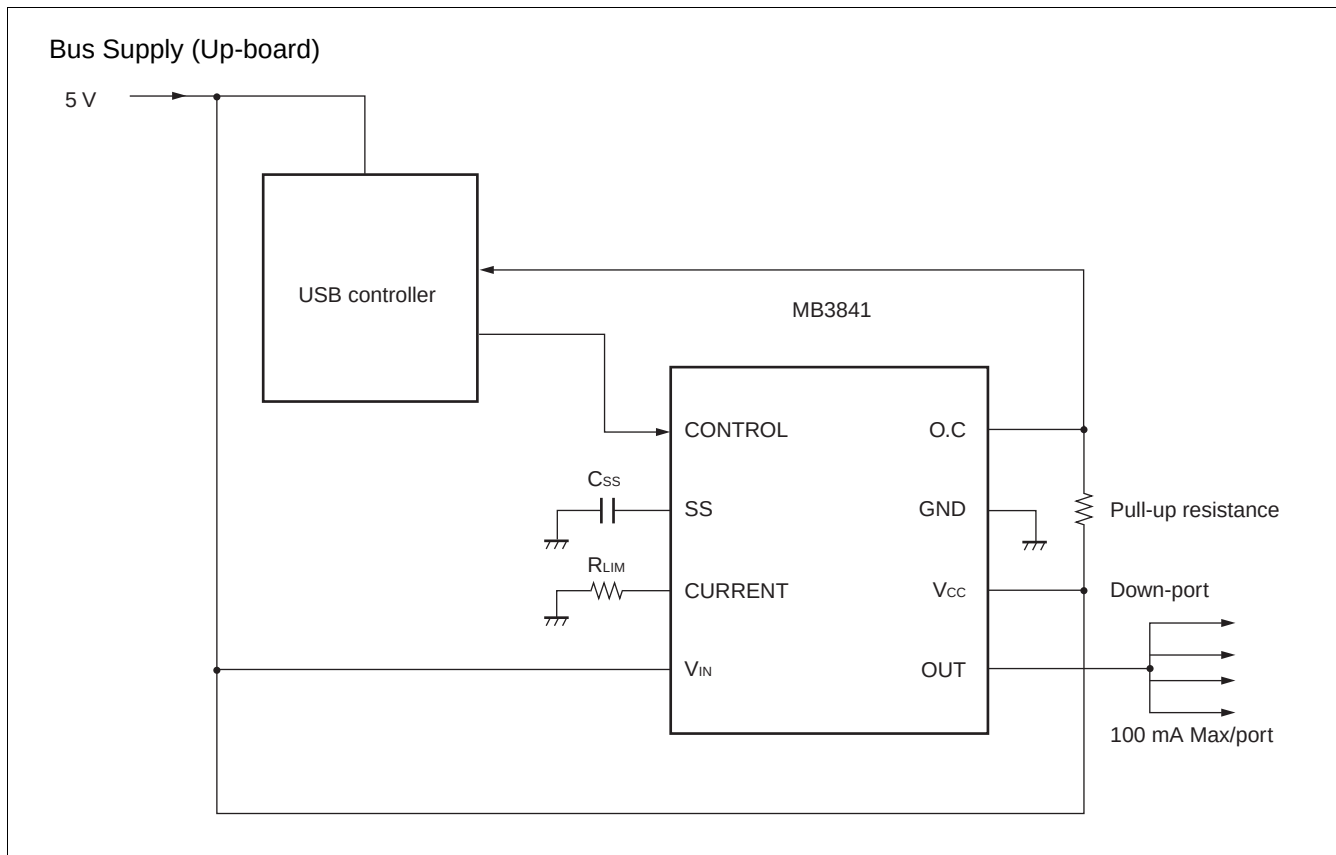

(2) Self Supplied Hub (NON-GANG Mode Connection)

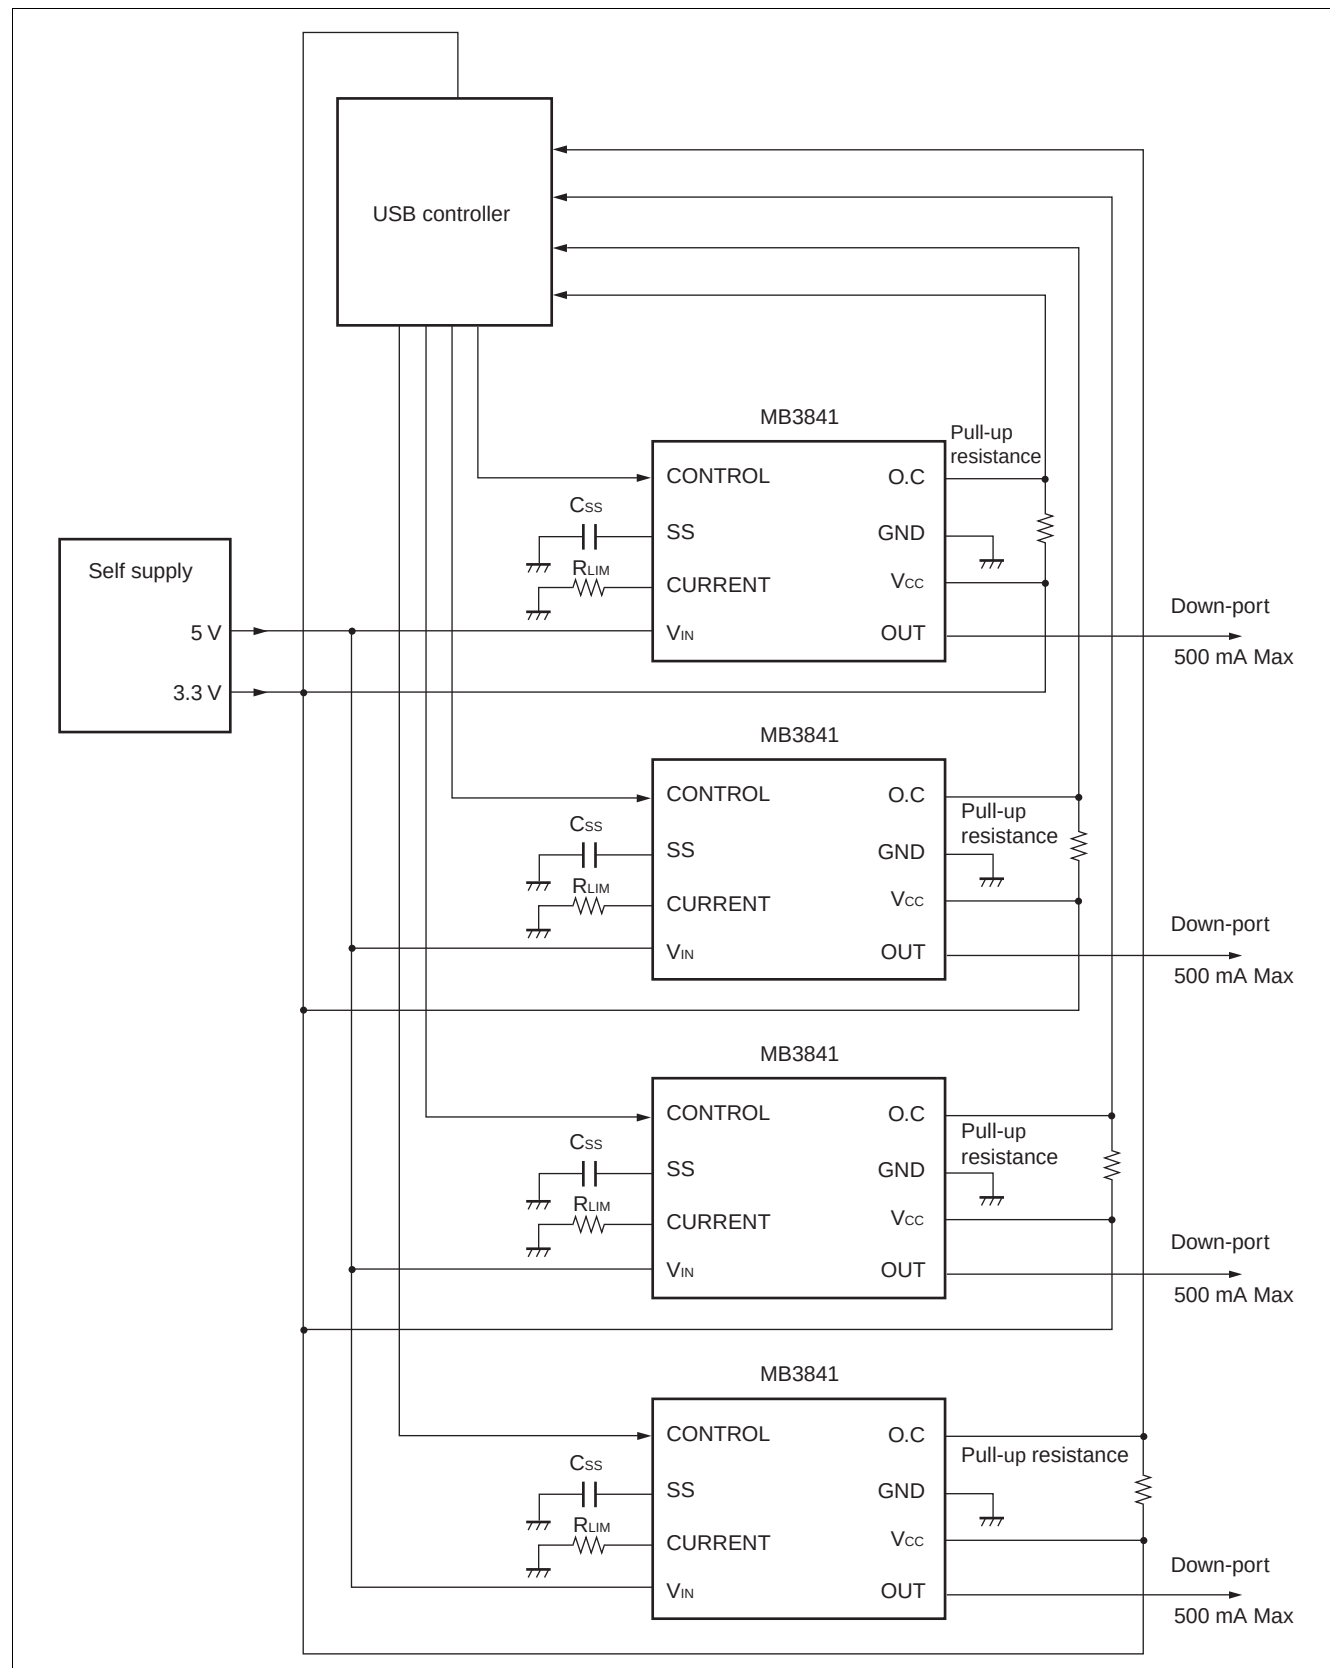

■ USAGE PRECAUTION

1. Never use settings exceeding maximum rated conditions.

Exceeding maximum rated conditions may cause permanent damage to the LSI.

Also, it is recommended that recommended operating conditions be observed in normal use.

Exceeding recommended operating conditions may adversely affect LSI reliability.

2. Use this device within recommended operating conditions.

Recommended operating conditions are values within which the normal LSI operation is warranted.

Standard electrical characteristics are warranted within the range of recommended operating conditions and within the listed conditions for each parameter.

3. Printed circuit board ground lines should be set up with consideration for common impedance.

4. Take appropriate static electricity measures.

- Containers for semiconductor materials should have anti-static protection or be made of conductive material.
- After mounting, printed circuit boards should be stored and shipped in conductive bags or containers.
- Work platforms, tools, and instruments should be properly grounded.
- Working personnel should be grounded with resistance of 250 k Ω to 1 M Ω between body and ground in serial.


5. Do not apply negative voltages.

The use of negative voltages below -0.3 V may create parasitic transistors on LSI lines, which can cause abnormal operation.


■ ORDERING INFORMATION

Part number	Package	Remarks
MB3841 PF	8-pin Plastic SOP (FPT-8P-M01)	



■ PACKAGE DIMENSION

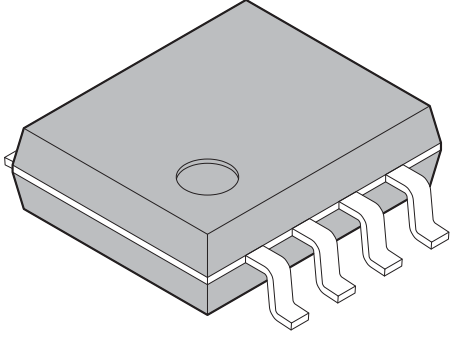8-pin plastic SOP  (FPT-8P-M01)	Lead pitch	1.27 mm
	Package width × package length	5.3 × 6.35 mm
	Lead shape	Gullwing
	Sealing method	Plastic mold
	Mounting height	2.25 mm MAX
	Weight	0.10 g
	Code (Reference)	P-SOP8-5.3×6.35-1.27

8-pin plastic SOP
(FPT-8P-M01)

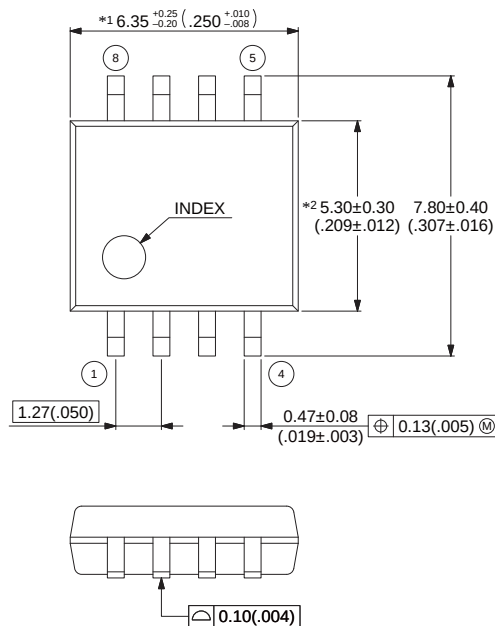

Note 1) *1 : These dimensions include resin protrusion.
 Note 2) *2 : These dimensions do not include resin protrusion.
 Note 3) Pins width and pins thickness include plating thickness.
 Note 4) Pins width do not include tie bar cutting remainder.

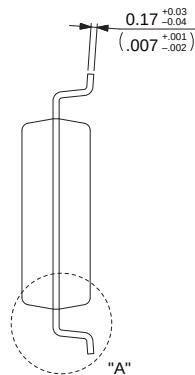

■ CONTENTS

	page
- DESCRIPTION	1
- FEATURES	1
- PIN ASSIGNMENT	2
- PIN DESCRIPTION	3
- BLOCK DIAGRAM	4
- ABSOLUTE MAXIMUM RATINGS	5
- RECOMMENDED OPERATING CONDITIONS	5
- ELECTRICAL CHARACTERISTICS	6
- DIAGRAM	7
- TYPICAL CHARACTERISTICS	9
- FUNCTIONAL DESCRIPTION	11
- OUTPUT CURRENT LIMITATION SETTING RLIM [Ω]	11
- TYPICAL APPLICATION	12
- SAMPLE APPLICATIONS	13
- USAGE PRECAUTION	15
- ORDERING INFORMATION	15
- PACKAGE DIMENSION	16

MEMO

MEMO

FUJITSU MICROELECTRONICS LIMITED

Shinjuku Dai-Ichi Seimei Bldg., 7-1, Nishishinjuku 2-chome,
Shinjuku-ku, Tokyo 163-0722, Japan
Tel: +81-3-5322-3329
<http://jp.fujitsu.com/fml/en/>

For further information please contact:

North and South America

FUJITSU MICROELECTRONICS AMERICA, INC.
1250 E. Arques Avenue, M/S 333
Sunnyvale, CA 94085-5401, U.S.A.
Tel: +1-408-737-5600 Fax: +1-408-737-5999
<http://www.fma.fujitsu.com/>

Asia Pacific

FUJITSU MICROELECTRONICS ASIA PTE. LTD.
151 Lorong Chuan,
#05-08 New Tech Park 556741 Singapore
Tel : +65-6281-0770 Fax : +65-6281-0220
<http://www.fmal.fujitsu.com/>

Europe

FUJITSU MICROELECTRONICS EUROPE GmbH
Pittlerstrasse 47, 63225 Langen, Germany
Tel: +49-6103-690-0 Fax: +49-6103-690-122
<http://emea.fujitsu.com/microelectronics/>

FUJITSU MICROELECTRONICS SHANGHAI CO., LTD.

Rm. 3102, Bund Center, No.222 Yan An Road (E),
Shanghai 200002, China
Tel : +86-21-6146-3688 Fax : +86-21-6335-1605
<http://cn.fujitsu.com/fmc/>

Korea

FUJITSU MICROELECTRONICS KOREA LTD.
206 Kosmo Tower Building, 1002 Daechi-Dong,
Gangnam-Gu, Seoul 135-280, Republic of Korea
Tel: +82-2-3484-7100 Fax: +82-2-3484-7111
<http://kr.fujitsu.com/fmk/>

FUJITSU MICROELECTRONICS PACIFIC ASIA LTD.

10/F., World Commerce Centre, 11 Canton Road,
Tsimshatsui, Kowloon, Hong Kong
Tel : +852-2377-0226 Fax : +852-2376-3269
<http://cn.fujitsu.com/fmc/en/>

Specifications are subject to change without notice. For further information please contact each office.

All Rights Reserved.

The contents of this document are subject to change without notice.

Customers are advised to consult with sales representatives before ordering.

The information, such as descriptions of function and application circuit examples, in this document are presented solely for the purpose of reference to show examples of operations and uses of FUJITSU MICROELECTRONICS device; FUJITSU MICROELECTRONICS does not warrant proper operation of the device with respect to use based on such information. When you develop equipment incorporating the device based on such information, you must assume any responsibility arising out of such use of the information.

FUJITSU MICROELECTRONICS assumes no liability for any damages whatsoever arising out of the use of the information.

Any information in this document, including descriptions of function and schematic diagrams, shall not be construed as license of the use or exercise of any intellectual property right, such as patent right or copyright, or any other right of FUJITSU MICROELECTRONICS or any third party or does FUJITSU MICROELECTRONICS warrant non-infringement of any third-party's intellectual property right or other right by using such information. FUJITSU MICROELECTRONICS assumes no liability for any infringement of the intellectual property rights or other rights of third parties which would result from the use of information contained herein.

The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that FUJITSU MICROELECTRONICS will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

Exportation/release of any products described in this document may require necessary procedures in accordance with the regulations of the Foreign Exchange and Foreign Trade Control Law of Japan and/or US export control laws.

The company names and brand names herein are the trademarks or registered trademarks of their respective owners.