



CyberMark Inc./Sallie Mae
1050 Thomas Jefferson St. N.W.
Washington, D.C. 20007

Document No. 8013209002
Issued 10/16/95

Intelligent Card Reader (ICR)—Installation Instructions

Note

These instructions explain how to tape- or screw-mount an ICR.


Parts and tools

The ICR installation kit includes these parts:

Quantity	Part number	Part description
1	8013201001-XX	Intelligent card reader
1	8013201030	Mounting bracket
1	—	Power supply
4	—	#6 flathead mounting screws
3	—	Pieces of double-sided tape

Tools required to install the ICR depend on specific mounting requirements and locations. Whether to tape- or screw-mount is the installer's choice, based upon the specific location.

Before installing

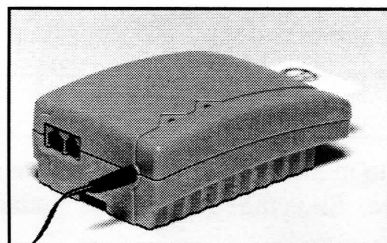


Prior to installation, plug the power supply into the jack on the ICR. The ICR performs a self-test to verify that it is operational. *If the unit is operational*, both red and green lights on the housing will flash briefly, then the red light will stop and the green light will continue flashing. At the same time the unit will play an odd version of "We're in the Money." *If the unit is not*

operational, it might respond in several ways. You might hear a low-pitched buzz, followed by a descending scale; you might hear random noise; you might hear nothing. Lights might or might not flash.

If you do not get the operational response described above, do not attempt to install the unit. Instead select another unit and begin the self-test again. Install only units that have successfully self-tested.

FCC statement. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation


Tape-mounting an ICR

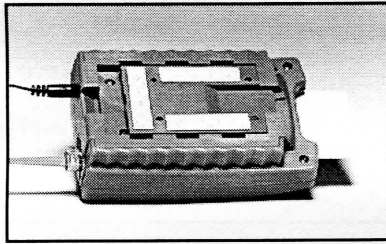

This ICR is ready to be tape-mounted. Be sure the power supply and modular plug are disconnected, and follow these instructions for tape-mounting.

Step	Action
1	Snap the mounting bracket into position on the back of the ICR. Attach the tape to the mounting bracket as shown, then pull the adhesive backing off the tape and press the mounting bracket firmly in place.
2	Plug the 8-pin modular plug into the 8-pin modular jack on the back of the ICR.
3	Plug the power supply into the jack on the back of the ICR.

Screw-mounting an ICR

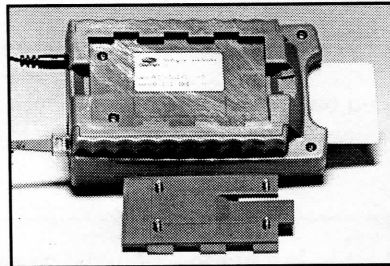

This ICR is ready to be screw-mounted. Be sure the power supply and modular plug are disconnected, and follow these instructions for screw-mounting.

Step	Action
1	Use the mounting bracket to mark drill holes, then drill them and screw the mounting bracket into place. Slide the ICR onto the mounting bracket until it snaps into position.
2	Plug the 8-pin modular plug into the 8-pin modular jack on the back of the ICR.
3	Plug the power supply into the jack on the back of the ICR.

Class B certification. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: (a) Reorient or relocate the receiving antenna. (b) Increase the separation between the equipment and the receiver. (c) Connect the equipment to an outlet on a circuit different from that to which the receiver is connected. (d) Consult the dealer or an experienced radio/TV technician for help.