


# Jack

161-2502

KOBI CONN

Jack

161-2502

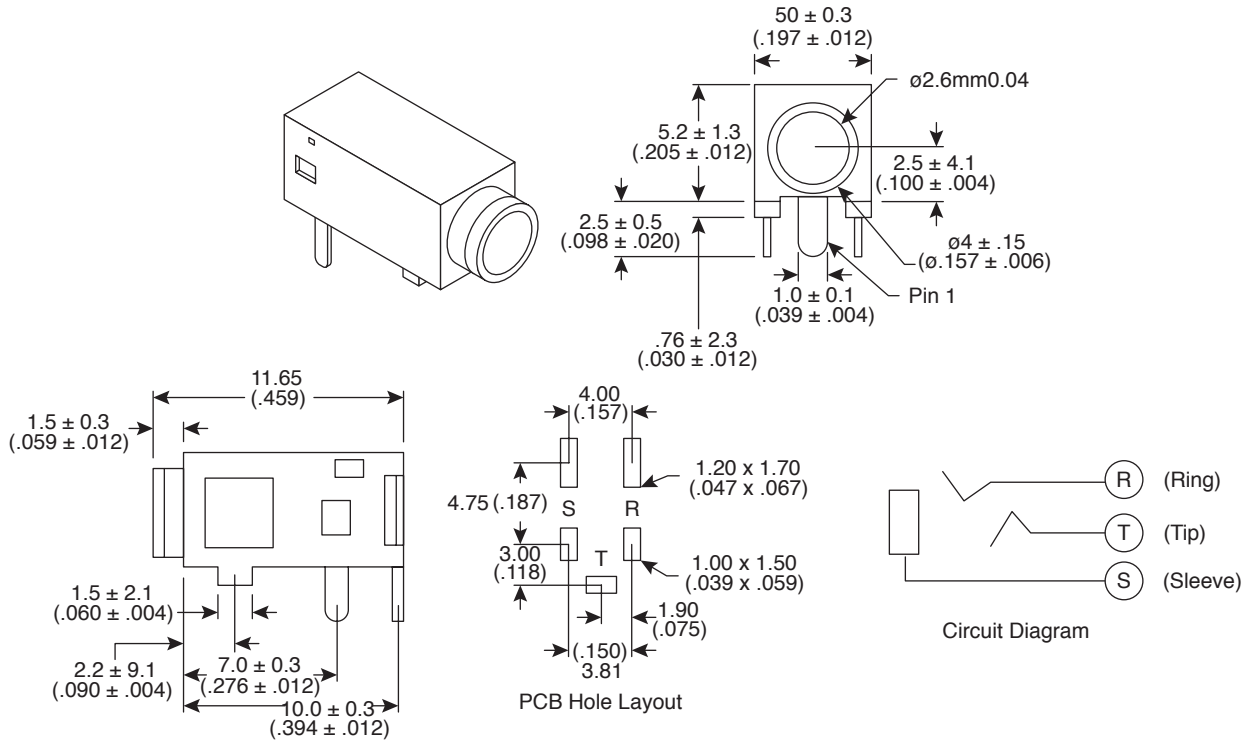

Dimensions: mm and (In.)

| SPECIFICATIONS          |                     |
|-------------------------|---------------------|
| Type:                   | 2.5mm stereo phone  |
| Withstand voltage:      | 500VAC for 1 minute |
| Insulation resistance:  | 100MΩ               |
| Contact resistance:     | 30mΩ                |
| Life:                   | 5,000 cycles        |
| Max. wave solder Temp.: | 213°C for 3 seconds |
| Body:                   | Duranex 3300        |
| Contacts:               | Tin plated brass    |
| Outer ring:             | Nickel plated brass |

Date Last Revised: 10-14-05

Available from Mouser Electronics  
1-800-346-6873  
www.mouser.com

KC- 300416