





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF VTE INCORPORATED. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF VTE INCORPORATED IS PROHIBITED. VTE MAKES NO WARRANTY, EXPRESSED OR IMPLIED, AS TO THE SUITABILITY OF A PRODUCT FOR ANY INTENDED USE. THE CUSTOMER SHALL BEAR THE SOLE RESPONSIBILITY OF DETERMINING THE SUITABILITY OF ANY VTE PRODUCT FOR ITS END USE.

| LTR. | REVISIONS                   | DATE    | INT. |
|------|-----------------------------|---------|------|
| A    | ADDED 0.12 RADIUS           | 3-17-98 | JC   |
| B    | UPDATED REFERENCE DIMENSION | 2-6-16  | RAS  |

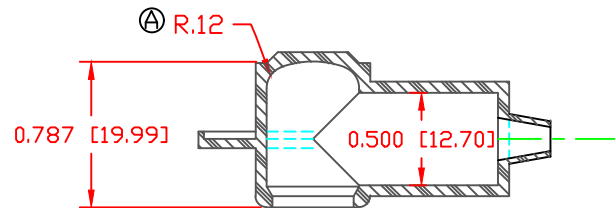

SECTION A-A  
TYP. WALL THICKNESS = .060" [1.5]  
SEAL NO. 1 SHOWN

SEAL THICKNESS = .030" [0.8]  
NO. 1  
Wire Gages  
18 - 10

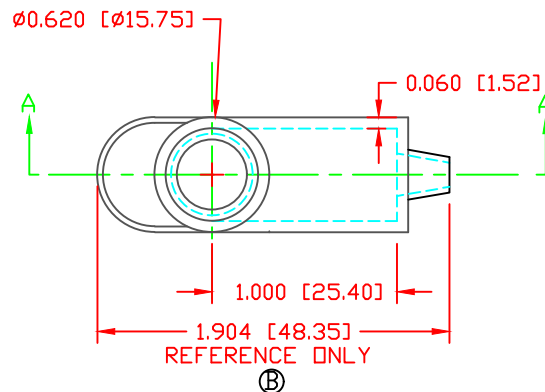

ALL DIMENSIONS GIVEN AS: in [mm]  
MOLDED PARTS: ±.030" [±0.8mm]  
HARDWARE ITEMS: ±.010" [±0.25mm]

VTE PART NO: 1101650114  
MATERIAL: PVC  
VENDOR PART NO: 9812-65-BLACK  
SHORE DUREMETER: "A" 10 SEC. 65  
SPECIFIC GRAVITY: 1.34  
ULT. ELONGATION %: 400  
MELTING TEMP: 315-335 F [157-168 C]  
BRITTLE TEMP: -54 F [-48 C]  
Tensile Strength PSI: 1550 PSI  
Dielectric Strength, v./mil: 453  
U.L. Rating: V2

|                                                                                       |           |                                                                                                                              |                   |
|---------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------------------------|-------------------|
|  |           | VTE Incorporated                                                                                                             |                   |
|                                                                                       |           | 5437 Robinson Road, P.O. Box 790<br>Pellston, Michigan 49769<br>Telephone: 1-800-527-9256, 231-539-8000<br>FAX: 231-539-0914 |                   |
| REF:                                                                                  | DATE:     | DRN BY:                                                                                                                      | WEIGHT:           |
| CUSTOMER DIMS                                                                         | 3-20-98   | JC                                                                                                                           | .024 LBS [10.8 G] |
|                                                                                       |           | CHK'D BY:                                                                                                                    | MDL               |
| TITLE: TERMINAL INSULATOR CAP                                                         |           |                                                                                                                              |                   |
| MATERIAL: PVC                                                                         |           | PART NO.                                                                                                                     |                   |
| COLOR: BLACK                                                                          | DRG CLASS | REV B                                                                                                                        |                   |
|                                                                                       |           | 212N1V14                                                                                                                     |                   |

DO NOT SCALE