
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B3	REVISED PER ECO-12-000193	30JAN2012	CJV	CWR

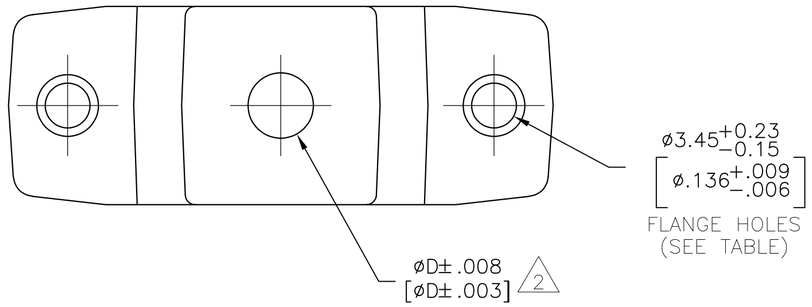

1. MATERIAL: PVC, FLAMMABILITY RATING UL 94V-0.
2. INTERNAL FLASH UP TO 0.30[.012] IS PERMISSIBLE.
3. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI.
4. MATERIAL: TPV, FLAMMABILITY RATING UL 94V-0, HALOGEN FREE.

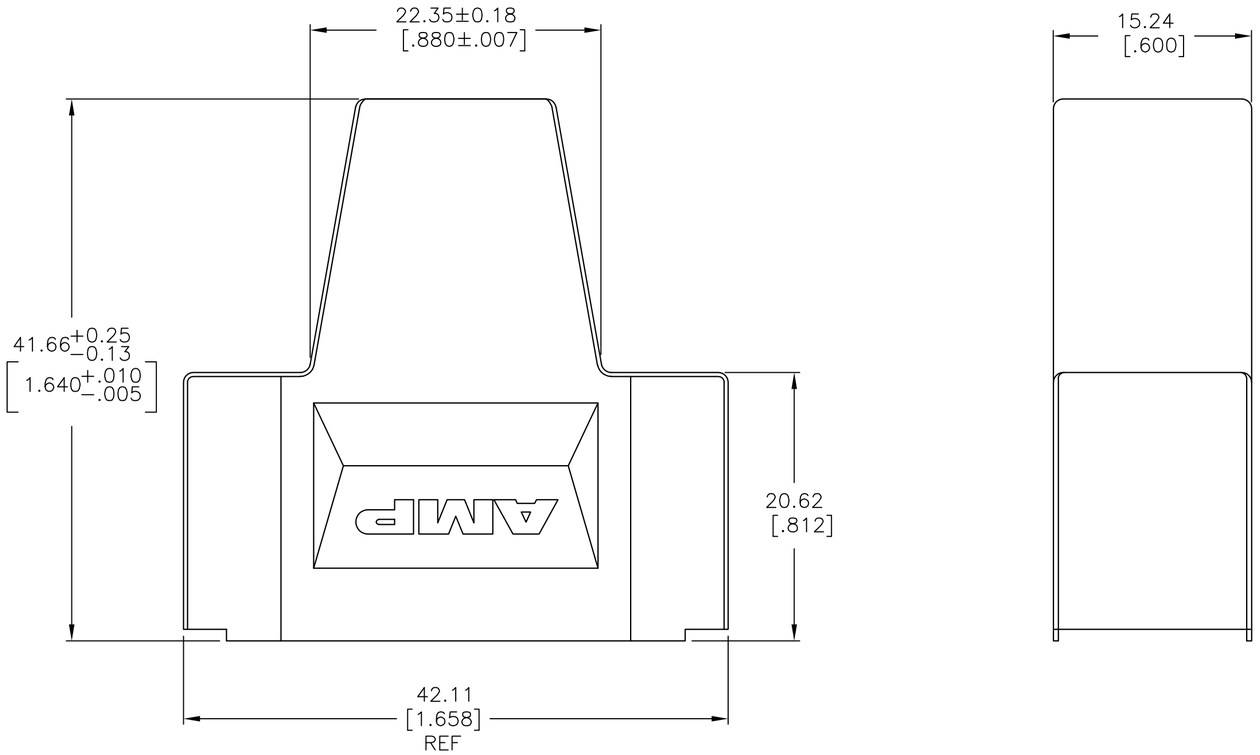

	COLOR	D DIM	FLANGE HOLES	MATERIAL	PART NUMBER
OBSOLETE	BLACK	5.05[.199]	YES	4	747934-8
	BLACK	6.27[.247]	NO	1	747934-7
3 OBSOLETE	GREY	5.05[.199]	YES	1	747934-5
	BLACK	5.05[.199]	NO	1	747934-2
	BLACK	5.05[.199]	YES	1	747934-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± 0.13[.005]
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE
FINISH: –

DWN J. GERACE 09DEC04
CHK C. ROHDE 09DEC04
APVD M. WALMSLEY 09DEC04
PRODUCT SPEC 114-40030
APPLICATION SPEC –
WEIGHT –

TE Connectivity

NAME: SHIELDING ENCLOSURE, SIZE 2, AMPLIMITE HDP
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-747934	–

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 1 | REV B3

747934