
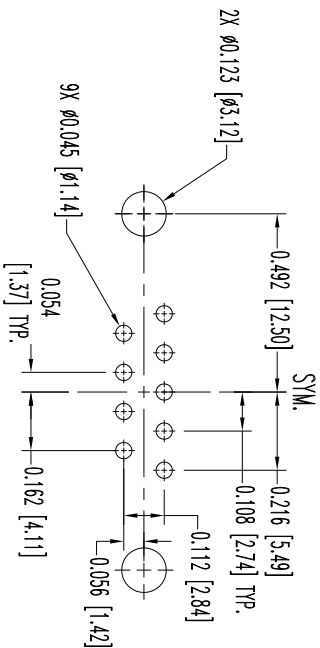
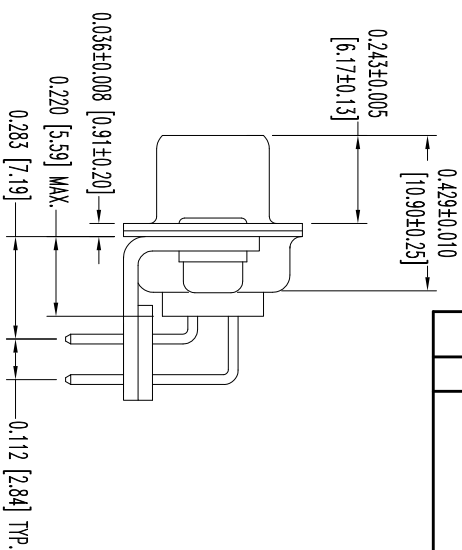
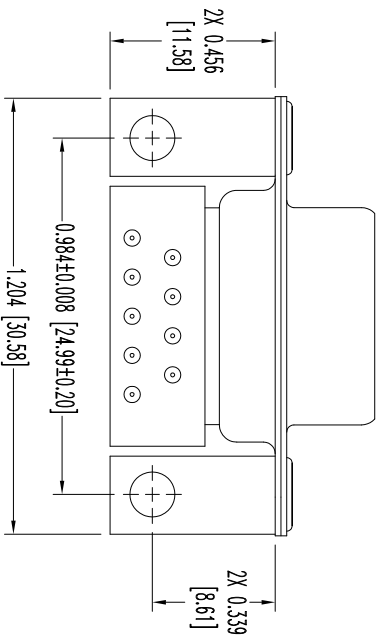


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE DRAWING IS AN INSTRUMENT OF SERVICE, POSITRONIC MAKES NO WARRANTY, REPRESENTATION OR GUARANTEE, AND ASSUMES NO LIABILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

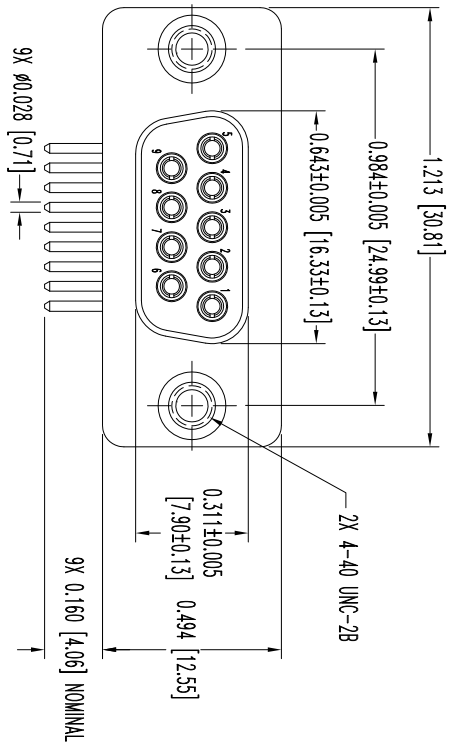

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: NYLON RESIN, UL 94V-0, BLACK COLOR.
CONTACTS: PRECISION MACHINED HIGH TENSILE PHOSPHOR BRONZE, GOLD FLASH OVER NICKEL FINISH.
SHELLS: STEEL, WITH TIN FINISH.
MOUNTING BRACKETS: BRASS, TIN FINISH.
CLINCH NUT: STEEL, TIN PLATED.
ALIGNMENT BAR: GLASS FILLED POLYESTER, COLOR: BLACK.
2. DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY D-SUBMINIATURE PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/45/STANDARDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
3. CONNECTORS ARE COMPLIANT TO THE CURRENT ROHS DIRECTIVE.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION/RECORD	APP	DR	CK
10-25	11	NC	ECO	34626	COLF BE COLF
6-10	13	A	ECO	39742	COLF BE COLF

SK12747



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

DATE: 10-25-11

DRAWING NUMBER: SK12747

MD SERIES

SCALE: N.T.S.

DRAWN BY: B. EVANS

APPROVED BY: COLE

DECIMAL TOL.: ± 0.015 [0.38]

ANGULAR TOL.: ± 5°

MD9F5R800X/AA

REV: A

FSCM 28198