


PHASE NOISE (1 Hz BW, typical)

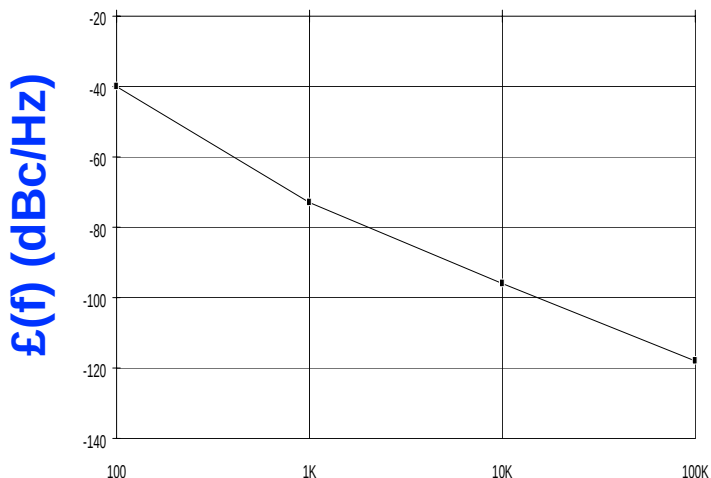

$L(f)$ (dBc/Hz)

OFFSET (Hz)

FEATURES

- Frequency Range: 400 - 500 MHz
- Tuning Voltage: 0-15 Vdc
- MINI-14H - Style Package

APPLICATIONS

- Earthstations
- RF Modems
- Test Instrumentation

PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Oscillation Frequency Range	400 - 500	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-95	dBc/Hz
Harmonic Suppression (2nd, typ.)	-6	dBc
Tuning Voltage	0-15	Vdc
Tuning Sensitivity (avg.)	11	MHz/V
Power Output	10±3	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	50	pF
Pushing	<1	MHz/V
Pulling (14dB Return Loss, Any Phase)	<50	MHz
Operating Temperature Range	0 to 70	°C
Package Style	MINI-14H	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	15	Vdc
Supply Current (Icc, typ.)	26	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES


- AN-100/1 : Mounting and Grounding of VCOs
- AN-102 : Proper Output Loading of VCOs
- AN-107 : How to Solder Z-COMM VCOs

NOTES:

TUNING CURVE, typ.

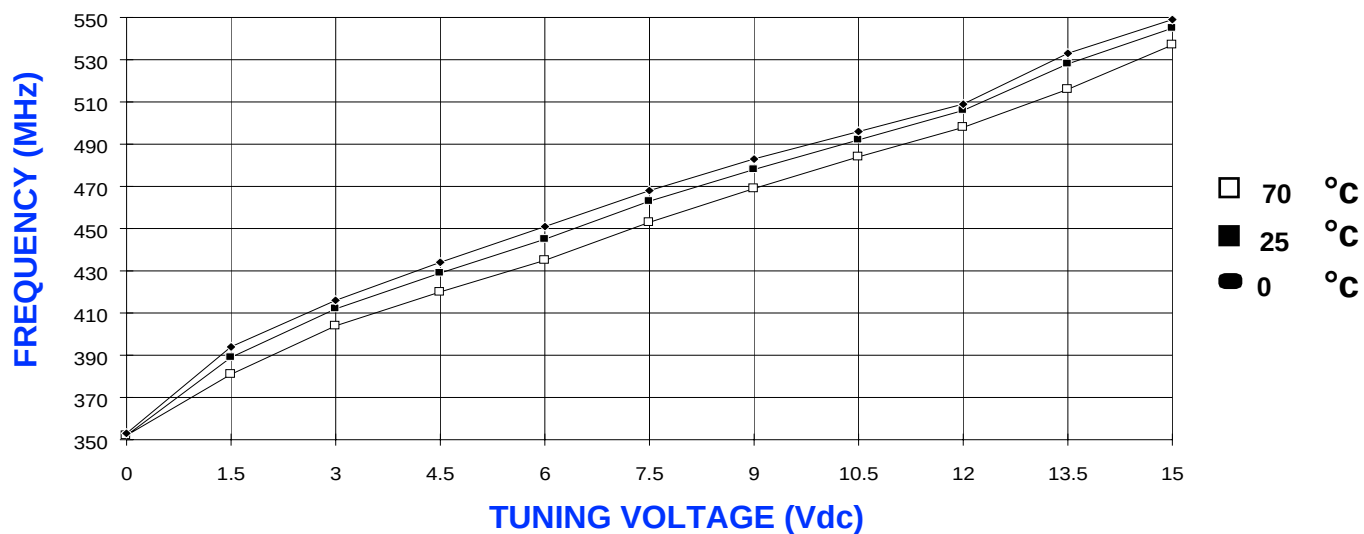

POWER CURVE, typ.

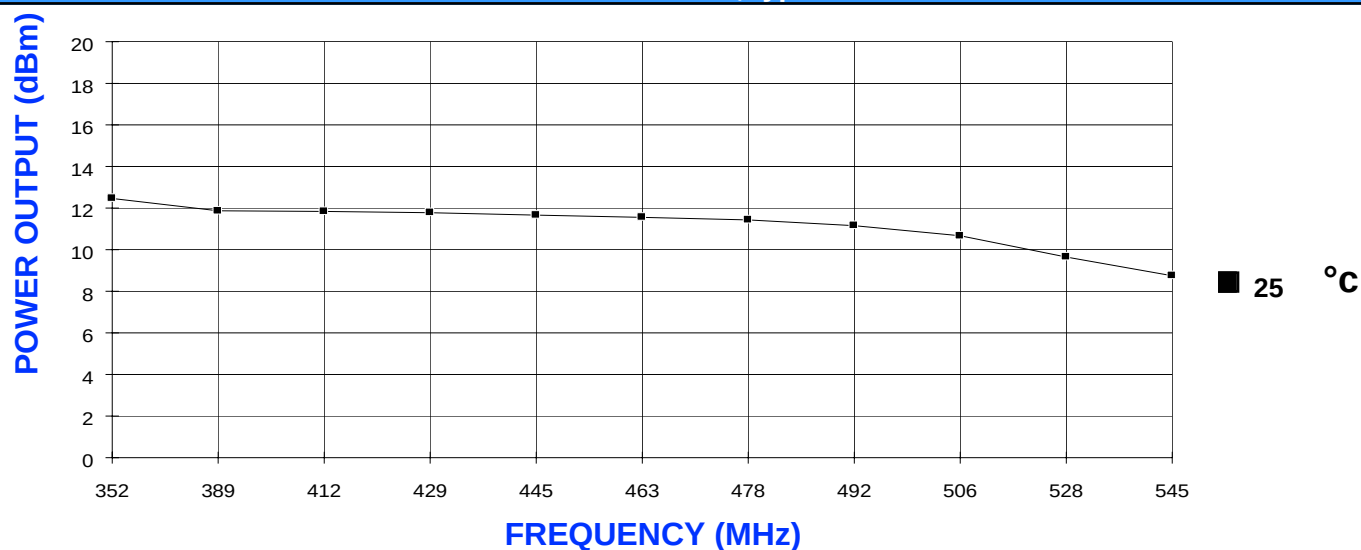

PHYSICAL DIMENSIONS

