
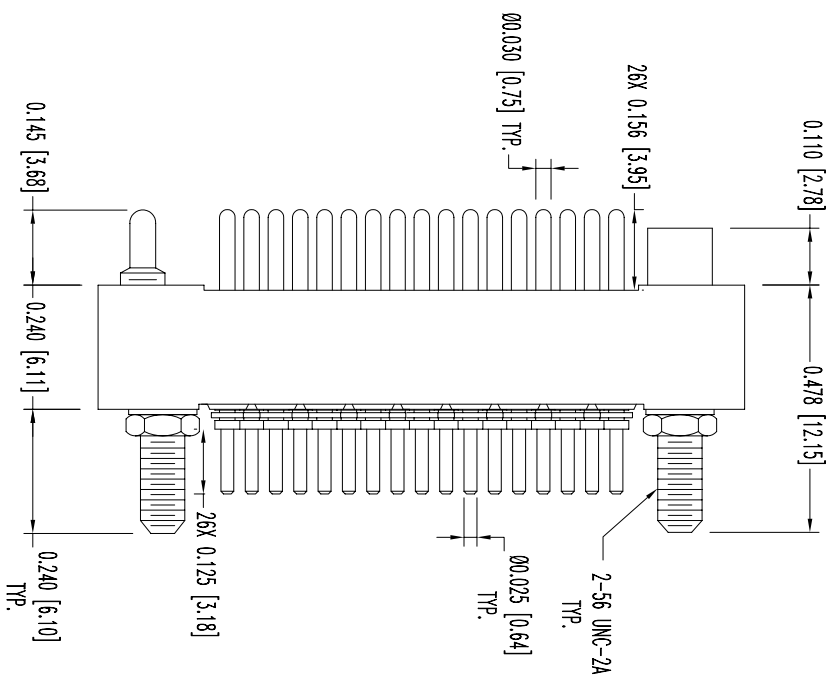
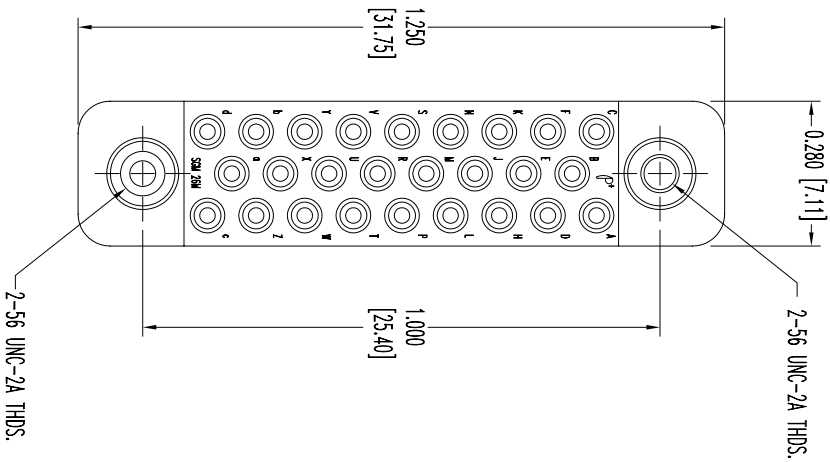


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE USER OF THIS DRAWING IS GIVEN NO WARRANTY, POSITRONIC DISCLAIMS ANY LIABILITY FOR DAMAGES, INCLUDING CONSEQUENTIAL DAMAGES, AND ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

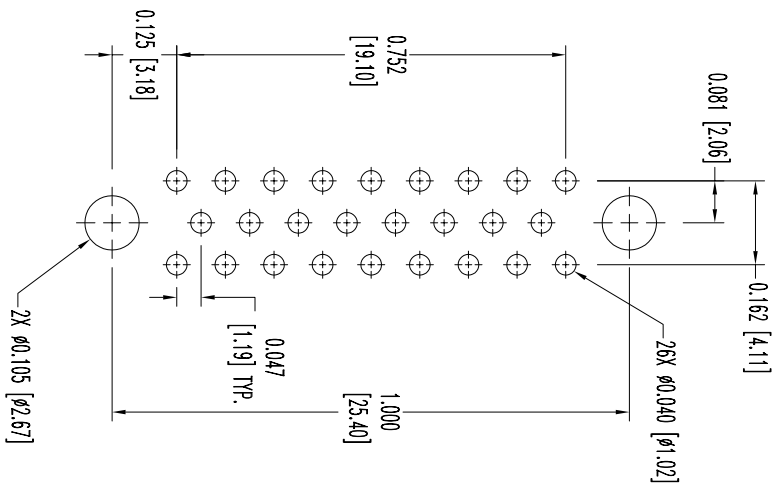

- NOTES:
- INSULATOR: GLASS FILLED DAP PER ASTM-D-5948 TYPE SDG-F, COLOR GREY.
 - CONTACTS: COPPER ALLOY, 0.000015 [0.38µ] GOLD OVER NICKEL FINISH.
 - JACKSCREWS: STAINLESS STEEL, PASSIVATED.
 - HEX NUTS AND WASHERS: NYLON.
 - ELECTRICAL CHARACTERISTICS:
 - CONTACT CURRENT RATING: 5 AMPS, MAXIMUM.
 - INITIAL CONTACT RESISTANCE: 0.012 OHMS.
 - INSULATION RESISTANCE: 5 G OHMS MINIMUM.
 - WORKING VOLTAGE: 250 VAC [rms].
 - WORKING TEMPERATURE: -55°C TO 135°C.
 - DIMENSIONS ARE IN INCHES [MILLIMETERS].

DATE	REV	REVISION RECORD	APP	DR	CK
6-20-08	NC	ECO 29567	RCW	YK	TK

SK9503



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

SGM SERIES

SCALE N.T.S.

DRAWN BY YK

APPROVED BY R WILLIAMS

DATE 6-20-08

DRAWING NUMBER SK9503

REV. NC

DECIMAL TOL. ± 0.015 [0.38]

ANGULAR TOL. ± 5°

TITLE SGM26MDS4T0000

FSCM 28198