

SMD TACTILE SWITCHES


GROUND TERMINAL TYPE

STS-09 H=3.1mm


- Rating: DC12V 50mA
- Stroke: 0.25mm
- Force: 160±50gf
- Life: 1,000,000 Cycles
- Package: 1,500 Pcs/Reel



Circuit



Pad Layout

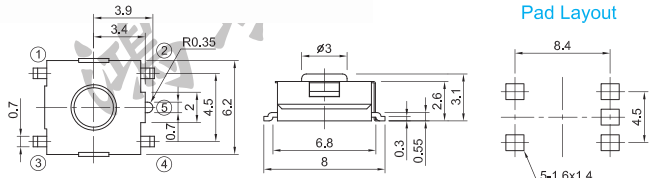

STS-010 H=3.4mm


- Rating: DC12V 50mA
- Stroke: 0.25mm
- Force: 220±50gf
- Life: 1,000,000 Cycles
- Package: 1,500 Pcs/Reel



Circuit



Pad Layout

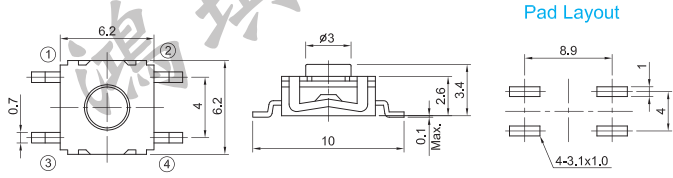


STS-014 H=0.6mm


- Rating: DC2V 10µA~DC15V 20mA
- Stroke: STS-014-A: 0.13mm
STS-014-B: 0.13mm
STS-014-C: 0.15mm
- Force: STS-014-A: 160±50gf
STS-014-B: 240±60gf
STS-014-C: 330±100gf
- Life: 500,000 Cycles
- Package: 10,000 Pcs/Reel



Circuit



Pad Layout

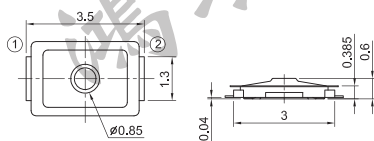


KNOB : LCP

STS-058-B H=1.5mm


- Rating: DC12V 50mA
- Stroke: 0.2mm
- Force: 260±50gf
- Life: 100,000 Cycles
- Package: 6,000 Pcs/Reel



Circuit




Pad Layout

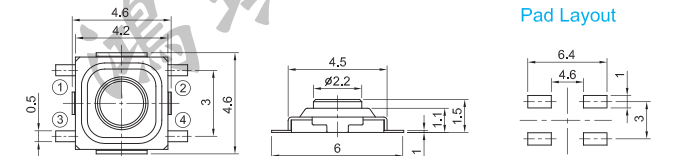


STS-059-B H=1.5mm


- Rating: DC12V 50mA
- Stroke: 0.25mm
- Force: 260±50gf
- Life: 100,000 Cycles
- Package: 3,000 Pcs/Reel



Circuit



Pad Layout

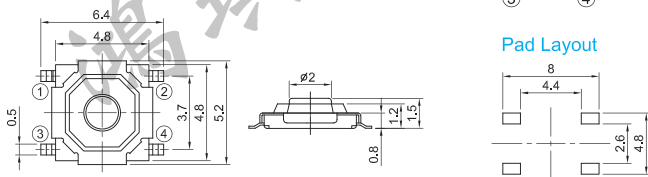


WITH GROUND


STS-060-A H=1.5mm

STS-060-B


- Rating: DC12V 50mA
- Stroke: 0.25mm
- Force: STS-060-A: 160±30gf
STS-060-B: 260±50gf
- Life: STS-060-A: 1,000,000 Cycles
STS-060-B: 100,000 Cycles
- Package: 3,000 Pcs/Reel



Circuit




Pad Layout

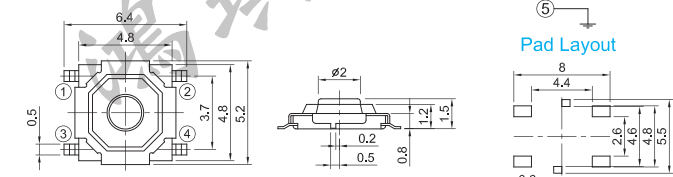


- STS-A5 H=4.3mm 1,200Pcs/Reel
- STS-B5 H=5.0mm 1,200Pcs/Reel
- STS-C5 H=6.0mm 800Pcs/Reel
- STS-D5 H=7.0mm 750Pcs/Reel
- STS-E5 H=9.5mm 500Pcs/Reel

- Rating: DC12V 50mA
- Stroke: 0.25mm
- Force: 160±50gf
- Life: 1,000,000 Cycles

Circuit



Pad Layout

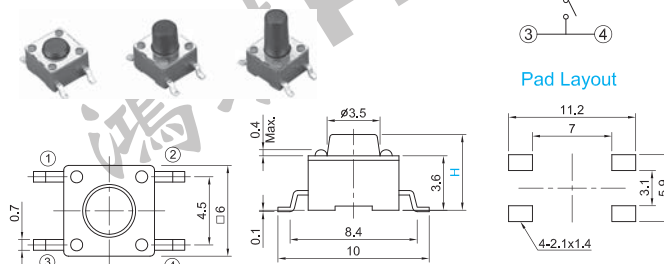

GROUND TERMINAL TYPE

STS-KA5 H=4.3mm 1,200Pcs/Reel


STS-KB5 H=5.0mm 1,200Pcs/Reel

STS-KC5 H=6.0mm 1,200Pcs/Reel

STS-KD5 H=7.0mm 750Pcs/Reel

- Rating: DC24V 50mA
- Stroke: 0.25mm
- Force: 160±50gf
- Life: 1,000,000 Cycles

Circuit



Pad Layout

