


SAF Series Air Velocity Switch

The solid state SAF Series airflow switch assures dependable thermal control and protection for air cooled systems. The SAF Series advantages include:

- ♦ Can drive logic circuits, audible/optical alarms and magnetic relays
- ♦ Available in sealed and dust-proof versions
- ♦ Can be socket mounted, PCB or hard wired
- ♦ Available in 50 to 1500 linear feet per minute ranges
- ♦ Not affected by ambient temperatures
- ♦ 5 VDC design with low power dissipation
- ♦ Signal conditioning not required

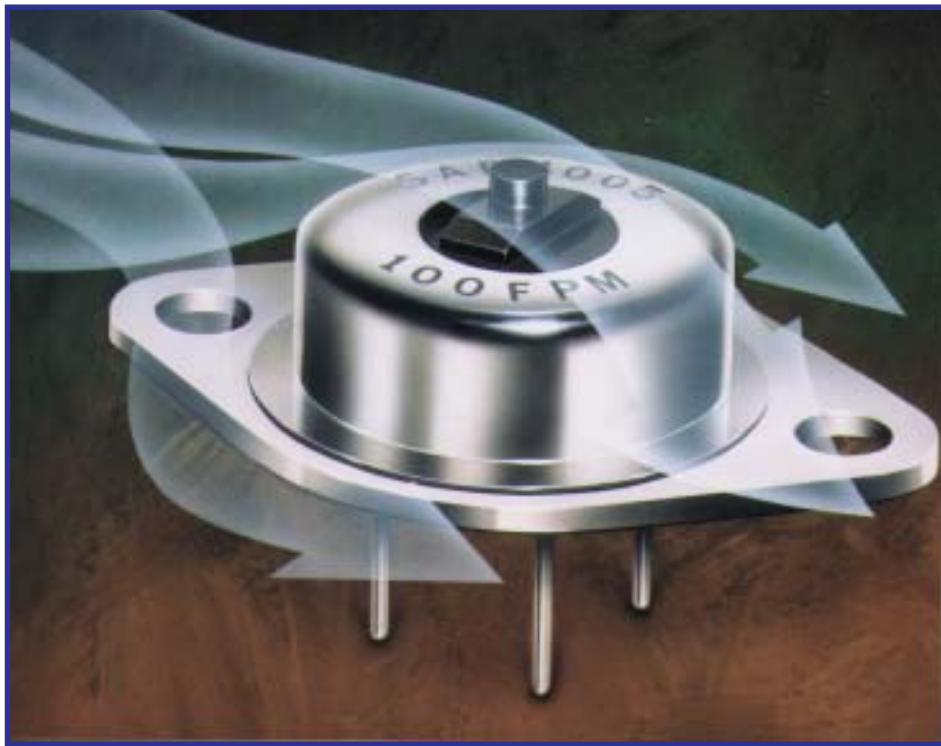


The advanced SAF Series Airflow Switch provides early detection and protection from overheating in high-end computer systems and peripherals, large power supplies, HVAC equipment, medical diagnostic systems and other electronic systems requiring forced air cooling.

The patented* design is based on a heated thermistor which monitors the airstream and detects a loss or reduction of airflow due to fan failures, clogged filters or obstructions in the air inlet/outlet. The thermistor temperature and, therefore, its resistance, is affected by changes in air velocity. The SAF thermistor is part of a sensing bridge which compares its own resistance against a reference circuit and determines the air velocity at which the device will trigger an output.

The innovative, low profile airflow sensor is easily mountable directly on the most densely populated circuit boards with as little as .625 inch spacing between boards, in sockets or bracket mount in plenums. All SAF models are complete, self-contained sensor/alarm devices requiring no additional circuitry.


*US Patent No. 4,686,450

All SAF Series Sensors are designed to be used in conjunction with typical logic circuitry. They operate on a +5 VDC supply and their output provides an open collector NPN transistor with its emitter connected to ground (0v). This type of versatile output allows driving logic circuits, indicating incandescent or LED lights or even magnetic relays, from DC sources from 5V to 30V.

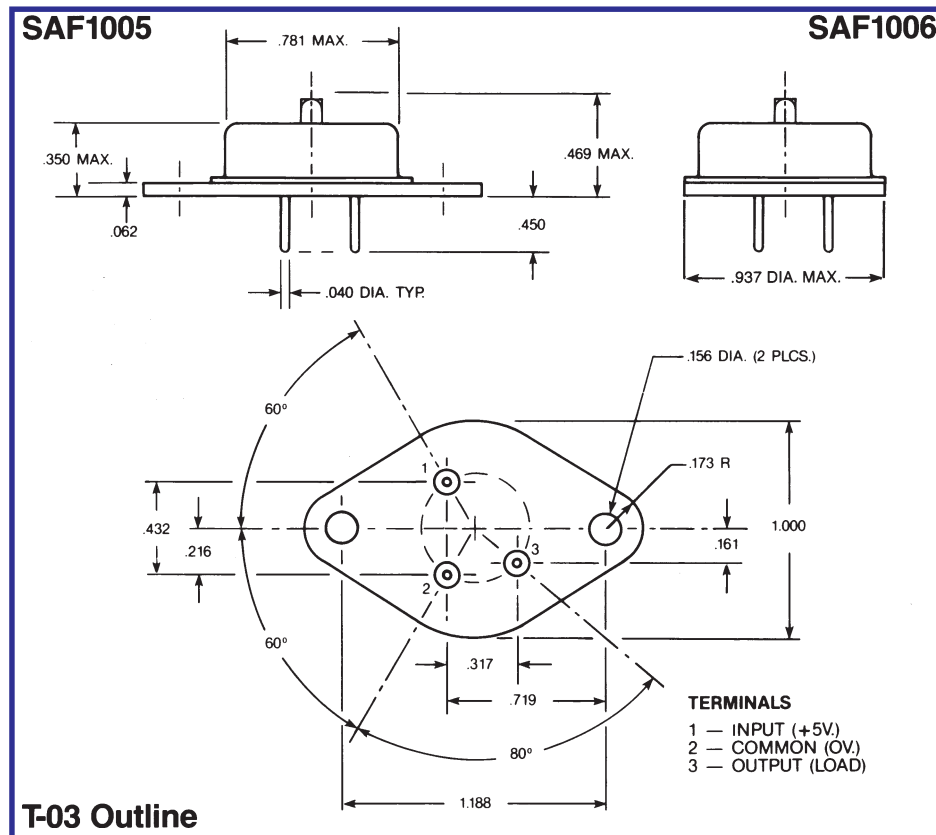


TYPICAL APPLICATIONS


1) Controlling logic circuitry





2) Controlling a relay



3) Controlling an L.E.D.




4) Controlling incandescents

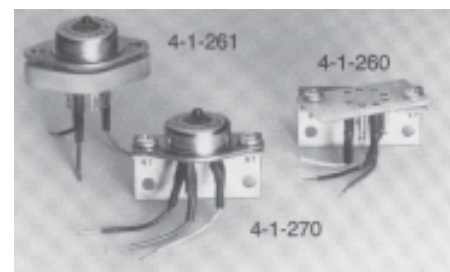

Mounting Accessories

- ◆ Military Socket Assembly with leads, no mounting bracket - P/N 4-1-261
- ◆ Bracket only, with leads attached to SAF Sensor - P/N 4-1-270
- ◆ Socket Assembly with mounting bracket and leads - P/N 4-1-260

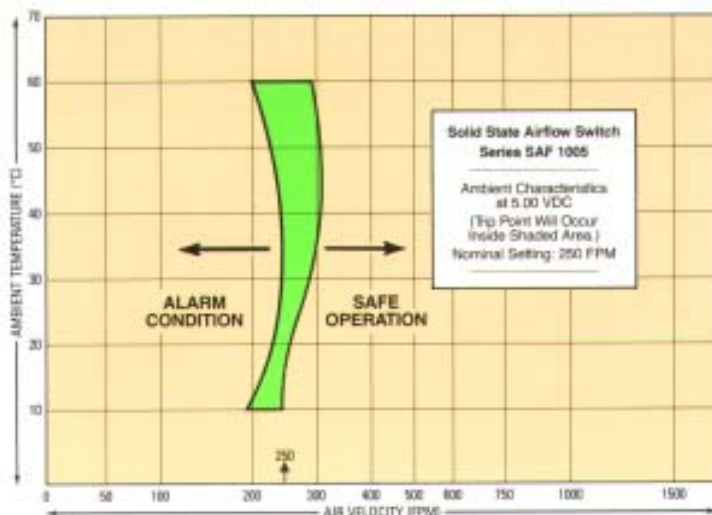

IMPROVED AMBIENT TEMPERATURE COMPENSATION

Warren G-V design criteria for the SAF Solid-State Airflow Sensor incorporates ambient temperature compensation techniques which provide close operating point tolerances over the ambient range of +10° to +60°C. The typical operating point versus ambient temperature curve for 250 FPM is illustrated. Curves for other settings are available.

SPECIFICATIONS

Input Voltage: +5 VDC ($\pm 5\%$)
 Power Dissipation: $\frac{1}{2}$ W max
 Output: open collector, solid state, able to sink up to 100 MA to ground, from DC sources up to 30V
 Sensing range: 50 to 1500 F.P.M.
 Sensing Tolerance: +10°C to +60°C see ambient temperature compensation curve
 Sensitivity: ± 25 F.P.M. from actual setting
 Hysteresis: Series SAF1005 (Standard Model) is typically 10% of the setting

THE SAF SERIES

The Standard Series/SAF1005 - indicates an "alarm condition" on low or no airflow by turning output transistor "on"; output is similar to a closed mechanical contact between output and ground when in alarm condition. A round version, SAF1006 without a flange is available for less board space utilization.

The Fail Safe Series/SAF1025 - an alternative to above-described series, a device failure indicates an "alarm condition" by turning the output "off"; similar to open contacts in alarm condition. It will operate with a wider hysteresis.

The Hermetically Sealed Series - withstands all board washing methods; more suitable for applications with hostile environments. Sealed versions of all the above units are available.

Output on Alarm Condition

Driving A Load (Relay, Lamp)	Logic Interface (Pull-up Resistor)
ON OFF	ON OFF

SAF Model Options

Dust Proof		Hermetically Sealed	
Flanged	Round Base	Flanged	Round Base
SAF1005 SAF1025	SAF1006 SAF1026	SAF1007 SAF1027	SAF1008 SAF1028

World leaders



Radiodetection is a proud member of the SPX group of companies, which provide technical products and service solutions worldwide.

Radiodetection and its associated companies specialize in the design and manufacture of products for the location and maintenance of underground pipes and cables. Our aim is to be viewed as the supplier of choice of 'high performance' quality equipment using advanced product technologies. We are also committed to both design innovation and customer support.

Technical support



Radiodetection equipment users have easy access to technical support. A call to your regional representative, or the Radiodetection head office, will put you in contact with our team of field-experienced technical experts.

Servicing and repair



Radiodetection has a team of factory-trained service technicians and dedicated service facilities. Turnaround is fast, and costs are very competitive.

Training



Product training for your operators and training personnel is available on your site, or at Radiodetection's headquarters. Training is with qualified instructors and each trainee receives a certificate to confirm they have received the training.

America

Radiodetection

154 Portland Road
Bridgton, ME 04009, USA
Tel: +1 (207) 647 9495
Toll Free: +1 (877) 247 3797
Fax: +1 (207) 647 9496
Email: rd.sales.us@spx.com
Web: www.radiodetection.com

Pearpoint

72055 Corporate Way
Thousand Palms CA 92276, USA
Tel: +1 800 688 8094
Tel: +1 760 343 7350
Fax: +1 760 343 7351
Email: pearpoint.sales.us@spx.com
Web: www.radiodetection.com

Radiodetection (Canada)

344 Edgeley Boulevard, Unit 34
Concord, Ontario L4K 4B7, Canada
Tel: +1 (905) 660 9995
Toll Free: +1 (800) 665 7953
Fax: +1 (905) 660 9579
Email: rd.sales.ca@spx.com
Web: www.radiodetection.com

Europe

Radiodetection Ltd (UK)

Western Drive
Bristol BS14 0AF, UK
Tel: +44 (0) 117 976 7776
Fax: +44 (0) 117 976 7775
Email: rd.sales.uk@spx.com
Web: www.radiodetection.com

Radiodetection (France)

13 Grande Rue, 76220
Neuf Marché, France
Tel: +33 (0) 232 8993 60
Fax: +33 (0) 235 9095 58
Email: rd.sales.fr@spx.com
Web: <http://fr.radiodetection.com>

Radiodetection (Benelux)

Industriestraat 11
7041 GD 's-Heerenberg, Netherlands
Tel: +31 (0) 314 66 47 00
Fax: +31 (0) 314 66 41 30
Email: rd.sales.nl@spx.com
Web: <http://nl.radiodetection.com>

Radiodetection (Germany)

Groendahlscher Weg 118
46446 Emmerich am Rhein, Germany
Tel: +49 (0) 28 51 92 37 20
Fax: +49 (0) 28 51 92 37 520
Email: rd.sales.de@spx.com
Web: <http://de.radiodetection.com>

Asia-Pacific

Radiodetection (Asia-Pacific)

Room 708, CC Wu Building
302-308 Hennessy Road, Wan Chai
Hong Kong SAR, China
Tel: +852 2110 8160
Fax: +852 2110 9681
Email: rd.sales.cn@spx.com
Web: www.radiodetection.com

Radiodetection (China)

Hongfu Mansion, Room 61622
Zheng Ge Zhuang, Bei Qi Jia Town
Chang Ping District
Beijing 102209, China
Tel: +86 (0) 10 8975 5540
Fax: +86 (0) 10 8975 5640
Email: rd.service.cn@spx.com
Web: <http://cn.radiodetection.com>

Radiodetection (Australia)

Unit 14, 5-7 Prosperity Parade
Warriewood NSW 2102, Australia
Tel: +61 (0) 2 9979 8555
Fax: +61 (0) 2 9979 7733
Email: rd.sales.au@spx.com
Web: www.radiodetection.com

To see the full range of products and services provided by Radiodetection visit:

www.radiodetection.com

Radiodetection products are under continuous development and are subject to change, we reserve the right to alter or amend any published specification without notice.
Copyright 2008 Radiodetection Ltd. - SPX Corporation. All rights reserved. Radiodetection Ltd. is a subsidiary of SPX Corporation.



Radiodetection
AN SPX COMPANY