

13

12

11

10

9

8

7

6

5

4


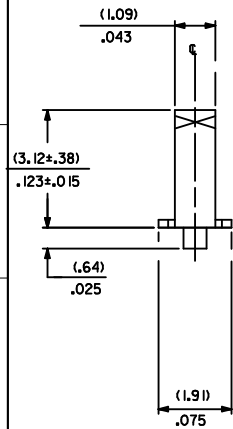
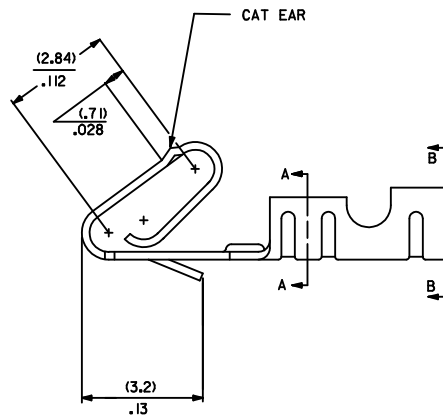
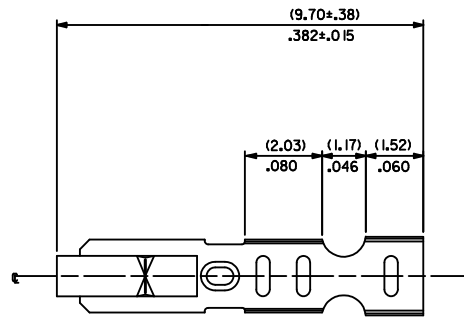


3

2

1

NOTES:

1. MATERIAL: PHOS BRONZE
2. FINISH: SEE LEGEND
3. PRODUCT SPECIFICATION: PS-10-07
4. PACKAGING: SEE LEGEND
5. INSERTION FORCE OF TERMINAL INTO (2.54)/.100 CL HOUSING IS 11.1 N / 2.5 LBS MAX.
6. TERMINAL RETENTION IN HOUSING IS 26.7N / 6LBS MIN. WHEN PULLED AT THE RATE OF 25.4MM / 1 INCH PER MINUTE.
7. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
8. CRIMP IS FOR 22-30 GA WIRE WITH (.157)/.062 DIA. INSULATION MAX.
9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

SECTION A-A
BACKGROUND OMITTEDSECTION B-B
BACKGROUND OMITTED

41572-*(***)*

MATERIAL

A= SEE NOTE 1

FORM

L=LOOSE PER PK-2759-001

BLANK=CHAIN PER DETAIL B


PLATING

(P909) OVERALL HOT TIN DIP: (0.00254)/.000100 MIN.


(154) OVERALL TIN: (0.00254)/.000100 MIN. OVER

(0.00127)/.000050 MIN. NICKEL

PART NO.	ENG NO.
08-65-0804	41572-A(P909)
08-65-0805	41572-A(P909)L
41572-0002	41572-A(154)

WINDING DETAIL B
NOT TO SCALE

SELECT GOLD LOCATION



CORRECT NOTE 6
EC NO: UCP2011-2220
DRWN:MKIPPER 2011/08/02
CHKD:ANDERSON 2011/02/08
APPR:FSMITH 2012/04/05

QUALITY SYMBOLS
▽=0
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± .025	± .015
1 PLACE	± 0.38	± ---

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE
MM/IN

DRAWN BY DATE
SAMIEC 1993/03/19

CHECKED BY DATE
PATEL 1993/03/19

APPROVED BY DATE

MATERIAL NO.
SEE CHART

SIZE
C

SCALE
10:1

DESIGN UNITS
INCH

THIRD ANGLE PROJECTION

TITLE
KK (2.54)/.100 CRIMP
TERMINAL 22-30 GA
6459 WITH CAT EAR

MOLEX INCORPORATED

DOCUMENT NO.
SD-41572

SHEET NO.
1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

12

11

10

9

8

7

6

5

4

3

2

1