THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

LOC	DIST
AF	50

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER ECO–11–004820	11MAR11	RK	HMR

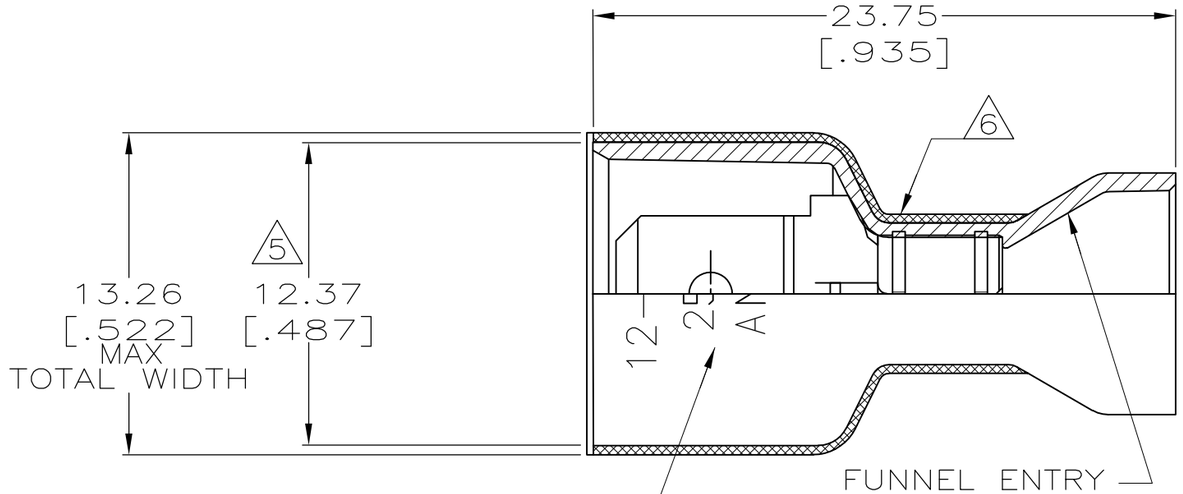

1 TAB DIMENSIONS 0.81±0.025 X 6.35 [.032±.001 X .250]

2 WIRE STRIP LENGTH 7.92 [.312].

3 INSULATION SIZE .320 MAX DIA.

4 SUPPLIED IN LOOSE PIECE.

5 DIMENSION DOES NOT INCLUDE TRIM BURR.

6 0.38 [.015] MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA.

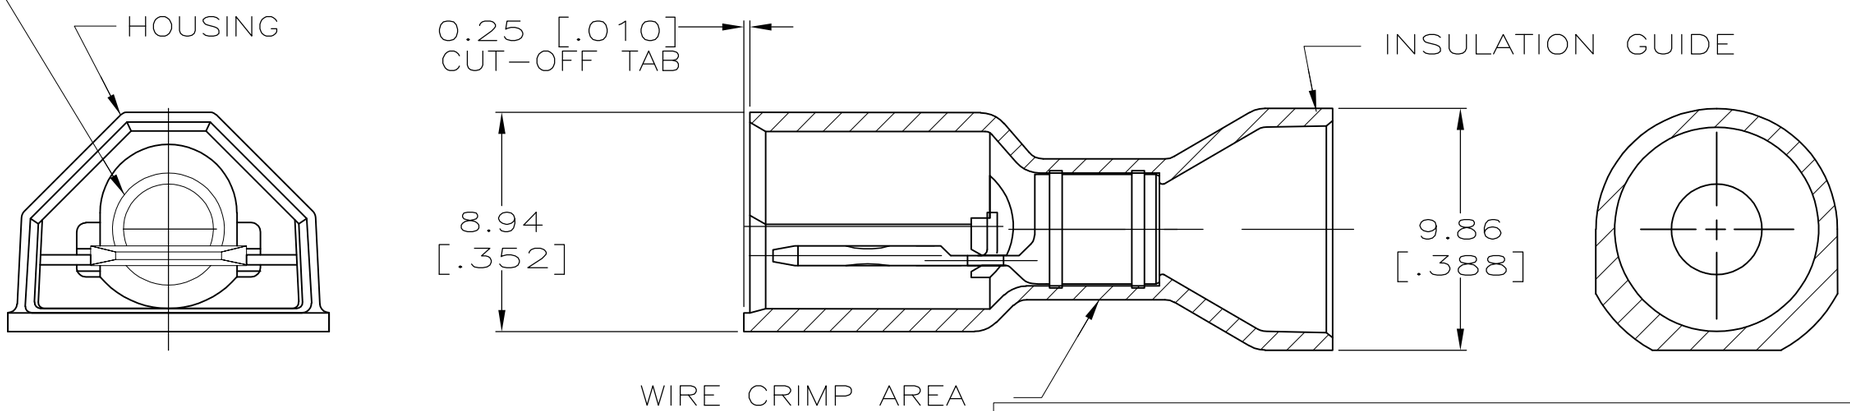

HOUSING: NYLON,COLOR–YELLOW
TAB: #3 HARD BRASS, TIN 0.002032 [.000080] MIN

MATERIAL & FINISH

4–521098–2

PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: MM[INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± 0.38 [.015]
3 PLC	± –
4 PLC	± –
ANGLES	± –

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN	JR RUTH	9/25/95
CHK	P FORTNEY	9/25/95
APVD	D BRATINA	9/25/95
PRODUCT SPEC	108–2017	
APPLICATION SPEC	114–2123	
WEIGHT	–	

TE Connectivity

NAME: TAB ASSEMBLY, ULTRA–FAST, [6.35] .250 SERIES, 12–10 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–521098	–

CUSTOMER DRAWING

SCALE	SHEET	REV
4:1	1 OF 1	B1