


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
FT	0		P2	REVISED PER ECO-11-004917	11MAR11	RK
						HMR

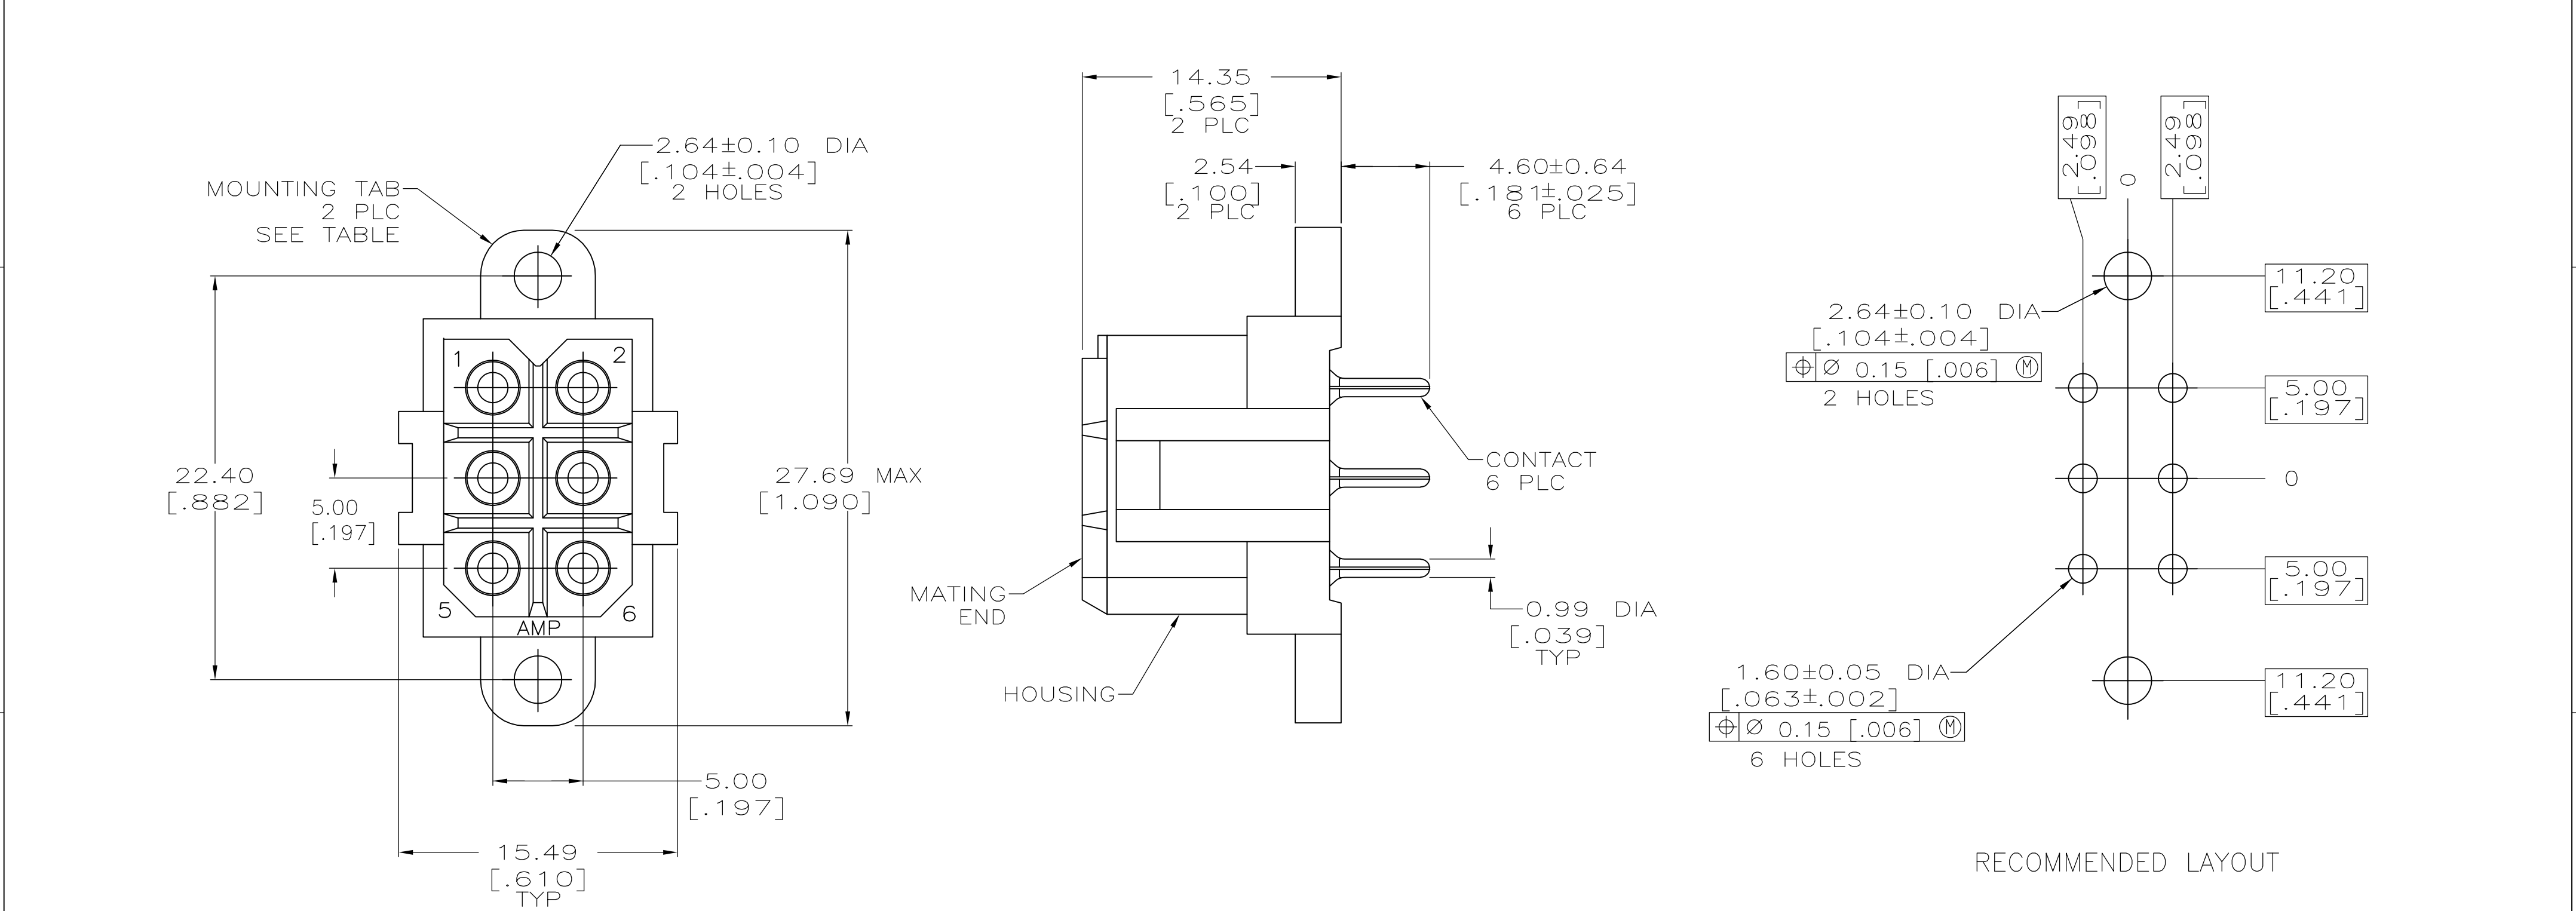

- ① NYLON, UL 94-VO RATED, RED.
- ② PHOSPHOR BRONZE.
- ③ 3.81um [.000150] MIN TIN-LEAD OVER 1.27um [.000050] MIN NICKEL.
- ④ 0.76um [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- ⑤ 3.81um [.000150] MIN TIN OVER 1.27um [.000050] MIN NICKEL.
- ⑥ 0.76um [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- ⑦ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE	⑥	NO	1-207524-0
	⑥	YES	207524-9
	⑤	NO	207524-8
	⑤	YES	207524-7
	④	NO	207524-4
	④	YES	207524-3
	③	NO	207524-2
	③	YES	207524-1
CONTACT FINISH		MOUNTING TABS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03/20/92		 TE Connectivity			
		L.SIPE	3-25-92					
DIMENSIONS:		CHK	R.STONE		NAME			
mm [INCHES]		APVD	A.TRAVIS					
		PRODUCT SPEC		108-10033				
		APPLICATION SPEC						
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
HOUSING: 1		CONTACT: SEE TABLE		WEIGHT	A2 00779 C=207524		—	
CUSTOMER DRAWING					SCALE	4:1	SHEET 1 of 1	REV P2