
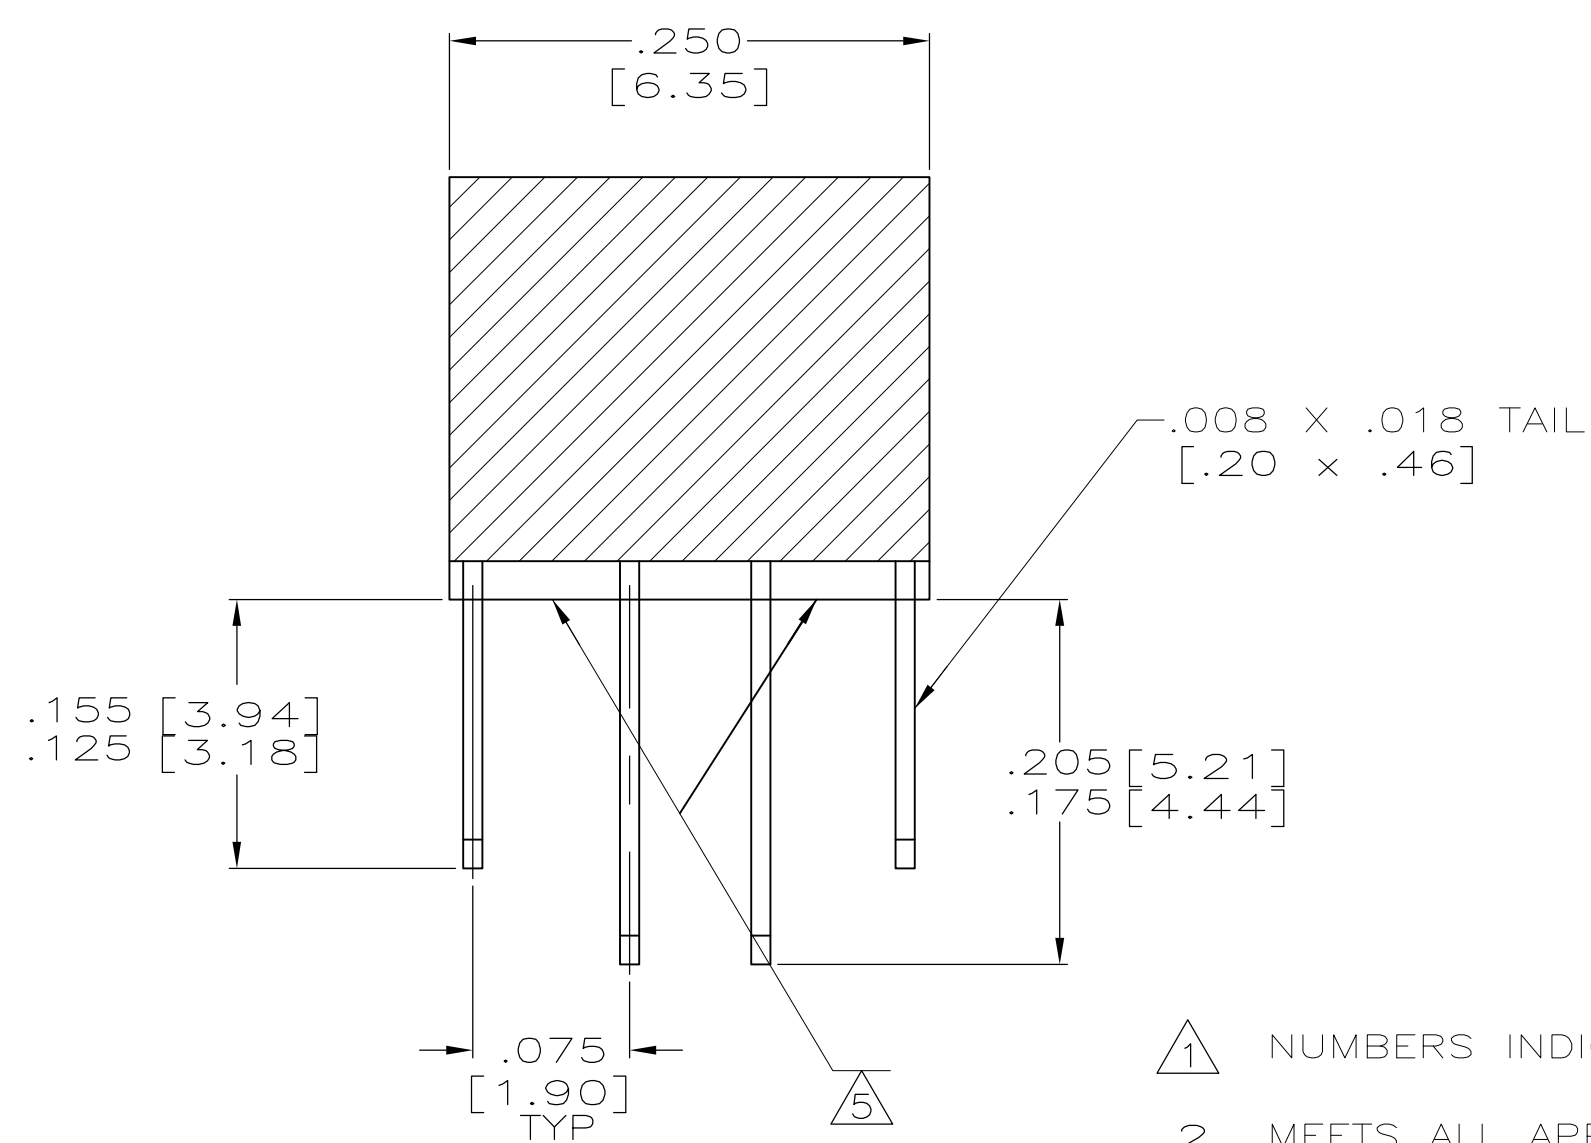
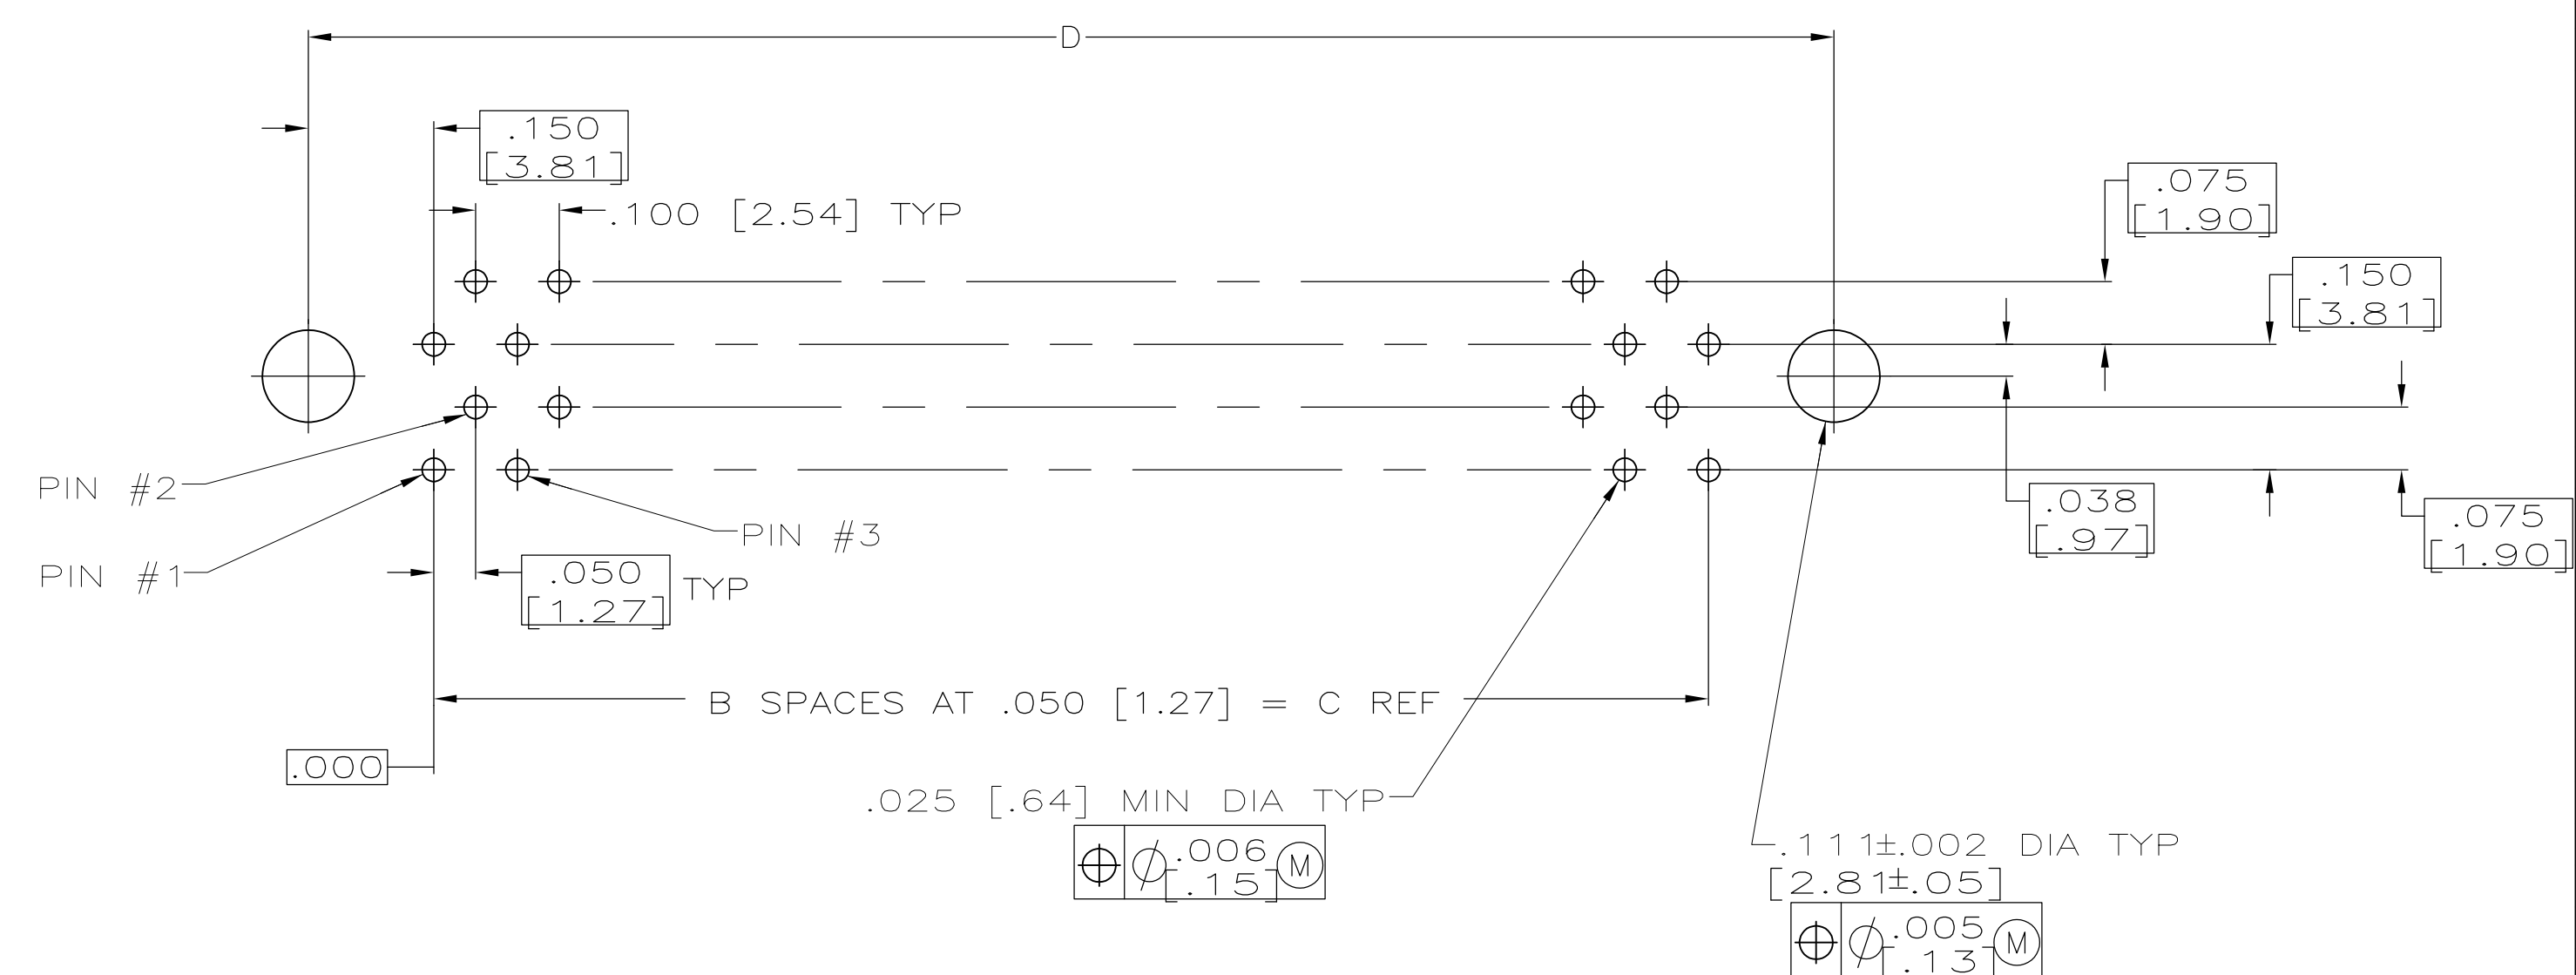




1. NUMBERS INDICATING END POSITIONS MARKED THIS SIDE ONLY.
2. MEETS ALL APPLICABLE REQUIREMENTS OF MIL-C-55302.
3. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER PER MIL-M-24519, GLCP-30F; COLOR: GRAY.
4. BRIDGE IN GROOVE N/A FOR 20 THRU 50 POSITIONS.
5. EPOXY IS ADDED TO BOTTOM OF HOUSING FOR INCREASED CONTACT RETENTION.
6. AMP, 00779, PART NO., MILITARY P/N AND DATE CODE MARKED IN THIS APPROXIMATE AREA.
7. CONNECTOR HAS NO EPOXY ADDED FOR CONTACT RETENTION OR SEALING.

5	3	M55302/119-11	1 - 64	3.000	[76.20]	3.450	[87.63]	3.150	[80.01]	63	3.740	[95.00]	128	2-530745-2
↑	↑	M55302/119-10	1 - 55	2.550	[64.77]	3.000	[76.20]	2.700	[68.58]	54	3.290	[83.57]	110	2-530745-1
		M55302/119-09	1 - 50	2.300	[58.42]	2.750	[69.85]	2.450	[62.23]	49	3.040	[77.22]	100	2-530745-0
		M55302/119-08	1 - 45	2.050	[52.07]	2.500	[63.50]	2.200	[55.88]	44	2.790	[70.87]	90	1-530745-9
		M55302/119-07	1 - 40	1.800	[45.72]	2.250	[57.15]	1.950	[49.53]	39	2.540	[64.52]	80	1-530745-8
		M55302/119-06	1 - 35	1.550	[39.37]	2.000	[50.80]	1.700	[43.18]	34	2.290	[58.17]	70	1-530745-7
		M55302/119-05	1 - 30	1.300	[33.02]	1.750	[44.45]	1.450	[36.83]	29	2.040	[51.82]	60	1-530745-6
		M55302/119-04	1 - 25	1.050	[26.67]	1.500	[38.10]	1.200	[30.48]	24	1.790	[45.47]	50	1-530745-5
↓		M55302/119-03	1 - 20	.800	[20.32]	1.250	[31.75]	.950	[24.13]	19	1.540	[39.12]	40	1-530745-4
		M55302/119-02	1 - 15	.550	[13.97]	1.000	[25.40]	.700	[17.78]	14	1.290	[32.77]	30	1-530745-3
5		M55302/119-01	1 - 10	.300	[7.62]	.750	[19.05]	.450	[11.43]	9	1.040	[26.42]	20	1-530745-2
7		M55302/119-11	1 - 64	3.000	[76.20]	3.450	[87.63]	3.150	[80.01]	63	3.740	[95.00]	128	1-530745-1
↑		M55302/119-10	1 - 55	2.550	[64.77]	3.000	[76.20]	2.700	[68.58]	54	3.290	[83.57]	110	1-530745-0
		M55302/119-09	1 - 50	2.300	[58.42]	2.750	[69.85]	2.450	[62.23]	49	3.040	[77.22]	100	530745-9
		M55302/119-08	1 - 45	2.050	[52.07]	2.500	[63.50]	2.200	[55.88]	44	2.790	[70.87]	90	530745-8
		M55302/119-07	1 - 40	1.800	[45.72]	2.250	[57.15]	1.950	[49.53]	39	2.540	[64.52]	80	530745-7
		M55302/119-06	1 - 35	1.550	[39.37]	2.000	[50.80]	1.700	[43.18]	34	2.290	[58.17]	70	530745-6
		M55302/119-05	1 - 30	1.300	[33.02]	1.750	[44.45]	1.450	[36.83]	29	2.040	[51.82]	60	530745-5
		M55302/119-04	1 - 25	1.050	[26.67]	1.500	[38.10]	1.200	[30.48]	24	1.790	[45.47]	50	530745-4
↓		M55302/119-03	1 - 20	.800	[20.32]	1.250	[31.75]	.950	[24.13]	19	1.540	[39.12]	40	530745-3
		M55302/119-02	1 - 15	.550	[13.97]	1.000	[25.40]	.700	[17.78]	14	1.290	[32.77]	30	530745-2
7	3	M55302/119-01	1 - 10	.300	[7.62]	.750	[19.05]	.450	[11.43]	9	1.040	[26.42]	20	530745-1
REMARKS	HSG MAT'L	MILITARY P/N	CAVITY ID	E		D		C		B	A		POSN.	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 3-13-90 T. WIEST CHK 3-15-90 J. HOKE		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± 1. PLC ± 2. PLC ± 3. PLC ±.005 [.013] 4. PLC ± ANGLES ±		NAME RECEPTACLE ASSY, MINI BOX MILITARY, WITH LOW FORCE CONTACTS -	
		APVD J. HOKE PRODUCT SPEC APPLICATION SPEC		SIZE A1	
MATERIAL -		FINISH -		DRAWING NO 00779	
		WEIGHT -		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 of 1 REV M	