


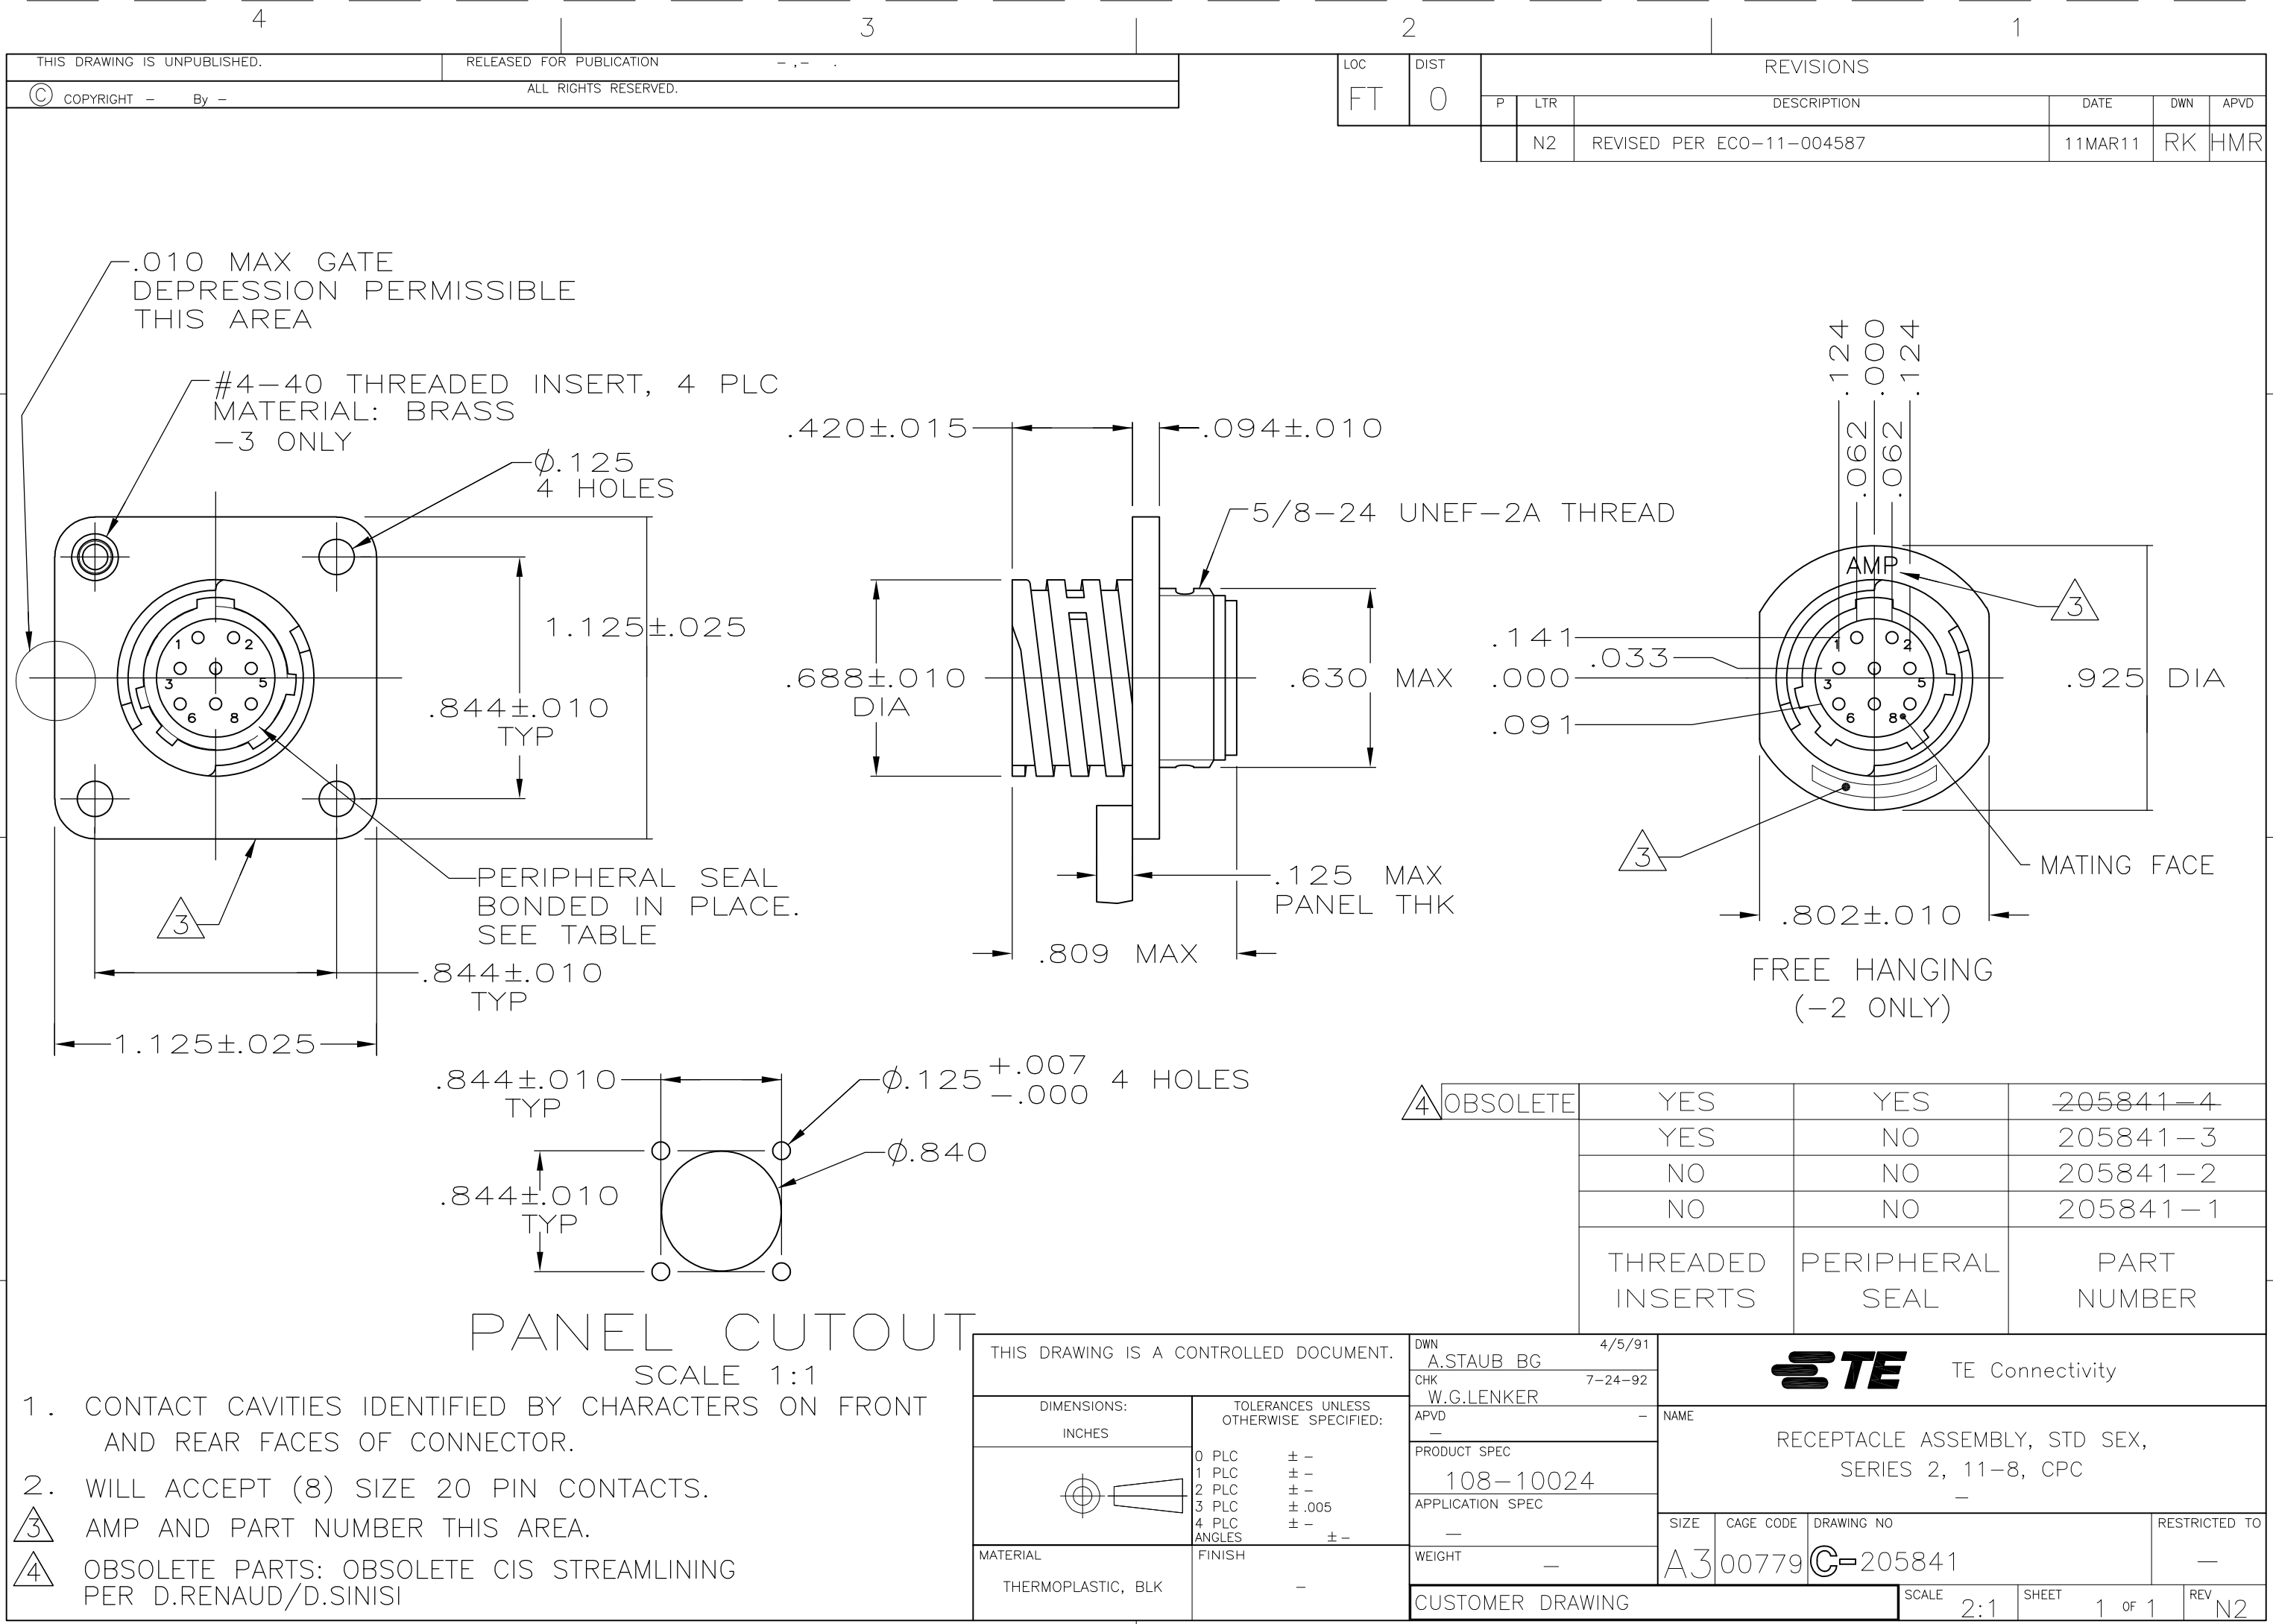

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			N2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

1. CONTACT CAVITIES IDENTIFIED BY CHARACTERS ON FRONT AND REAR FACES OF CONNECTOR.
2. WILL ACCEPT (8) SIZE 20 PIN CONTACTS.
- 3 AMP AND PART NUMBER THIS AREA.
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

4	OBSOLETE	YES	YES	205841-4
		YES	NO	205841-3
		NO	NO	205841-2
		NO	NO	205841-1
THREADED INSERTS		PERIPHERAL SEAL		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

MATERIAL

THERMOPLASTIC, BLK

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± .005

4 PLC ± -

ANGLES ± -

FINISH -

DWN

A.STAUB BG

4/5/91

CHK

W.G.LENKER

7-24-92

APVD

-

PRODUCT SPEC

108-10024

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

NAME

RECEPTACLE ASSEMBLY, STD SEX, SERIES 2, 11-8, CPC

SIZE

A3

CAGE CODE

00779

DRAWING NO

C-205841

RESTRICTED TO

-

SCALE

2:1

SHEET

1 OF 1

REV

N2

TE Connectivity