WEST-CAP®


MONOCERAM CERAMIC CAPACITORS

MOLDED RECTANGULAR CASE

CKR06 50, 100 & 200 VOLTS -55°C — + 125°C

MIL-C-39014/02
ESTABLISHED RELIABILITY

To complete the MIL Part number add the appropriate (-) Dash Number
Example:
M39014/02-1281 (MIL)
CKR06BX122KR (West-Cap)

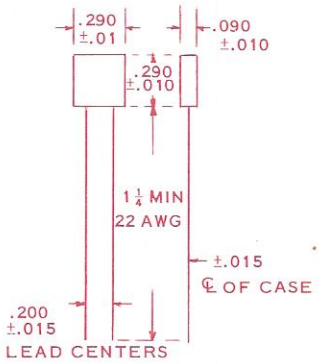

LEADS

Standard:
Electro Solder Plated
.025 Dia. (22 AWG)
Oxygen Free Copper
For Special Leads see page No. 2

WEST-CAP PART NUMBER	M39014/02 - (DASH NUMBER FROM TABLE) FAILURE RATE LEVEL (%/1,000 HOURS)					Capacitance	Capacitance tolerance	DC rated voltage
	2.0(L)	1.0(M)	0.1(P)	0.01(R)	0.001(S)	PF	±percent	volts
CKR06BX122K -	1361	1201	1241	1281	1321	1,200	10	200
CKR06BX152K -	1362	1202	1242	1282	1322	1,500	10	200
CKR06BX152M -	1363	1203	1243	1283	1323	1,500	20	200
CKR06BX182K -	1364	1204	1244	1284	1324	1,800	10	200
CKR06BX222K -	1366	1206	1246	1286	1326	2,200	10	200
CKR06BX222M -	1367	1207	1247	1287	1327	2,200	20	200
CKR06BX272K -	1368	1208	1248	1288	1328	2,700	10	200
CKR06BX332K -	1369	1209	1249	1289	1329	3,300	10	200
CKR06BX332M -	1370	1210	1250	1290	1330	3,300	20	200
CKR06BX392K -	1371	1211	1251	1291	1331	3,900	10	200
CKR06BX472K -	1372	1212	1252	1292	1332	4,700	10	200
CKR06BX472M -	1373	1213	1253	1293	1333	4,700	20	200
CKR06BX562K -	1374	1214	1254	1294	1334	5,600	10	200
CKR06BX682K -	1375	1215	1255	1295	1335	6,800	10	200
CKR06BX682M -	1376	1216	1256	1296	1336	6,800	20	200
CKR06BX822K -	1377	1217	1257	1297	1337	8,200	10	200
CKR06BX103K -	1378	1218	1258	1298	1338	10,000	10	200
CKR06BX103M -	1379	1219	1259	1299	1339	10,000	20	200
CKR06BX123K -	1380	1231	1271	1311	1351	12,000	10	100
CKR06BX153K -	1381	1220	1260	1300	1340	15,000	10	100
CKR06BX183K -	1382	1221	1261	1301	1341	18,000	10	100
CKR06BX223K -	1383	1222	1262	1302	1342	22,000	10	100
CKR06BX273K -	1384	1232	1272	1312	1352	27,000	10	100
CKR06BX333K -	1385	1223	1263	1303	1343	33,000	10	100
CKR06BX393K -	1386	1224	1264	1304	1344	39,000	10	100
CKR06BX473K -	1387	1225	1265	1305	1345	47,000	10	100
CKR06BX563K -	1388	1226	1266	1306	1346	56,000	10	100
CKR06BX683K -	1389	1227	1267	1307	1347	68,000	10	100
CKR06BX823K -	1390	1229	1269	1309	1349	82,000	10	100
CKR06BX104K -	1391	1230	1270	1310	1350	100,000	10	100
CKR06BX124K -	1392	1233	1273	1313	1353	120,000	10	50
CKR06BX154K -	1393	1234	1274	1314	1354	150,000	10	50
CKR06BX184K -	1394	1235	1275	1315	1355	180,000	10	50
CKR06BX224K -	1395	1236	1276	1316	1356	220,000	10	50
CKR06BX274K -	1396	1237	1277	1317	1357	270,000	10	50
CKR06BX334K -	1397	1238	1278	1318	1358	330,000	10	50
CKR06BX394K -	1398	1239	1279	1319	1359	390,000	10	50


WEST-CAP® MONOCERAM® CERAMIC CAPACITORS

MOLDED RECTANGULAR CASE

CKR06 50 VOLTS -55°C — + 125°C

MIL-C-39014/02
ESTABLISHED RELIABILITY

To complete the MIL Part number add the appropriate (-) Dash Number
Example:
M39014/02-1407 (MIL)
CKR06BX105KM (West-Cap)

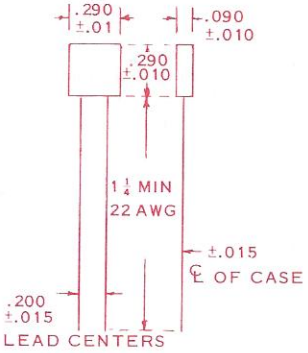

LEADS

Standard:
Electro Solder Plated
.025 Dia. (22 AWG)
Oxygen Free Copper
For Special Leads see page No. 2

WEST-CAP PART NUMBER	M39014/02 - (DASH NUMBER FROM TABLE) FAILURE RATE LEVEL (%/1,000 HOURS)					Capacitance	Capacitance tolerance	DC rated voltage
	2.0(L)	1.0(M)	0.1(P)	0.01(R)	0.001(S)			
						PF	±percent	volts
CKR06BX474K -	1399	1240	1280	1320	1360	470,000	10	50
CKR06BX564K -	1400	1404	1408	1412	1416	560,000	10	50
CKR06BX684K -	1401	1405	1409	1413	1417	680,000	10	50
CKR06BX824K -	1402	1406	1410	1414	1418	820,000	10	50
CKR06BX105K -	1403	1407	1411	1415	1419	1,000,000	10	50

For Additional Details Refer To MIL-C-39014 Specification

SPECIAL NOTICE

CK06 SERIES TO MIL-C-11015 SPECIFICATION

CK06 Series may be specified using the above chart. (Pages 16 - 17)

USE CK06 IN LIEU OF CKR06

The Physical Size, Values and Voltages are the same for either series.