

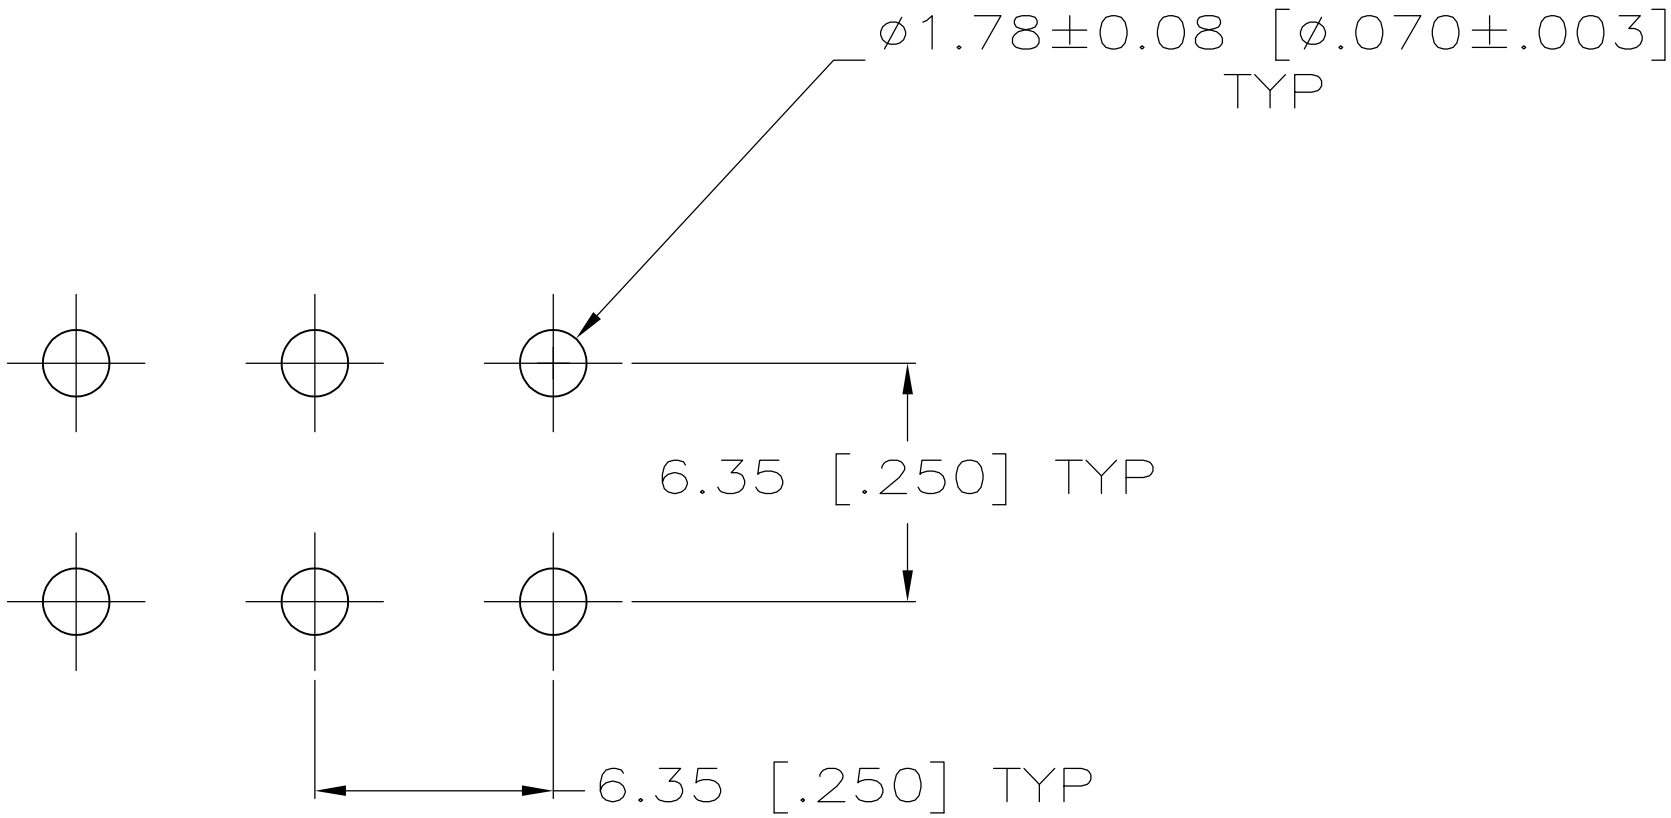


LOC	DIST	REVISIONS				
CM	00	P	LTR	DESCRIPTION	DATE	DWN APVD
		M1		REVISED PER ECO-11-004820	11MAR11	RK HMR

1. PARTS MUST COMPLY WITH AMP SOLDERABILITY SPEC 109-11-3.
2. CONTACT IS STAMPED FROM PRE-PLATED STOCK WHICH IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN STRIPED WITH 0.00076 [.000030] GOLD IN CONTACT AREA INDICATED AND TIN-LEAD ON SOLDER TAIL END.
3. CIRCUIT IDENTIFICATION CHARACTERS ARE ADJACENT TO THE INDICATED CAVITIES, BUT LOCATION AND ORIENTATION MAY DIFFER FROM PRINT.
4. CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND MATTE TIN ON SOLDER TAIL END.

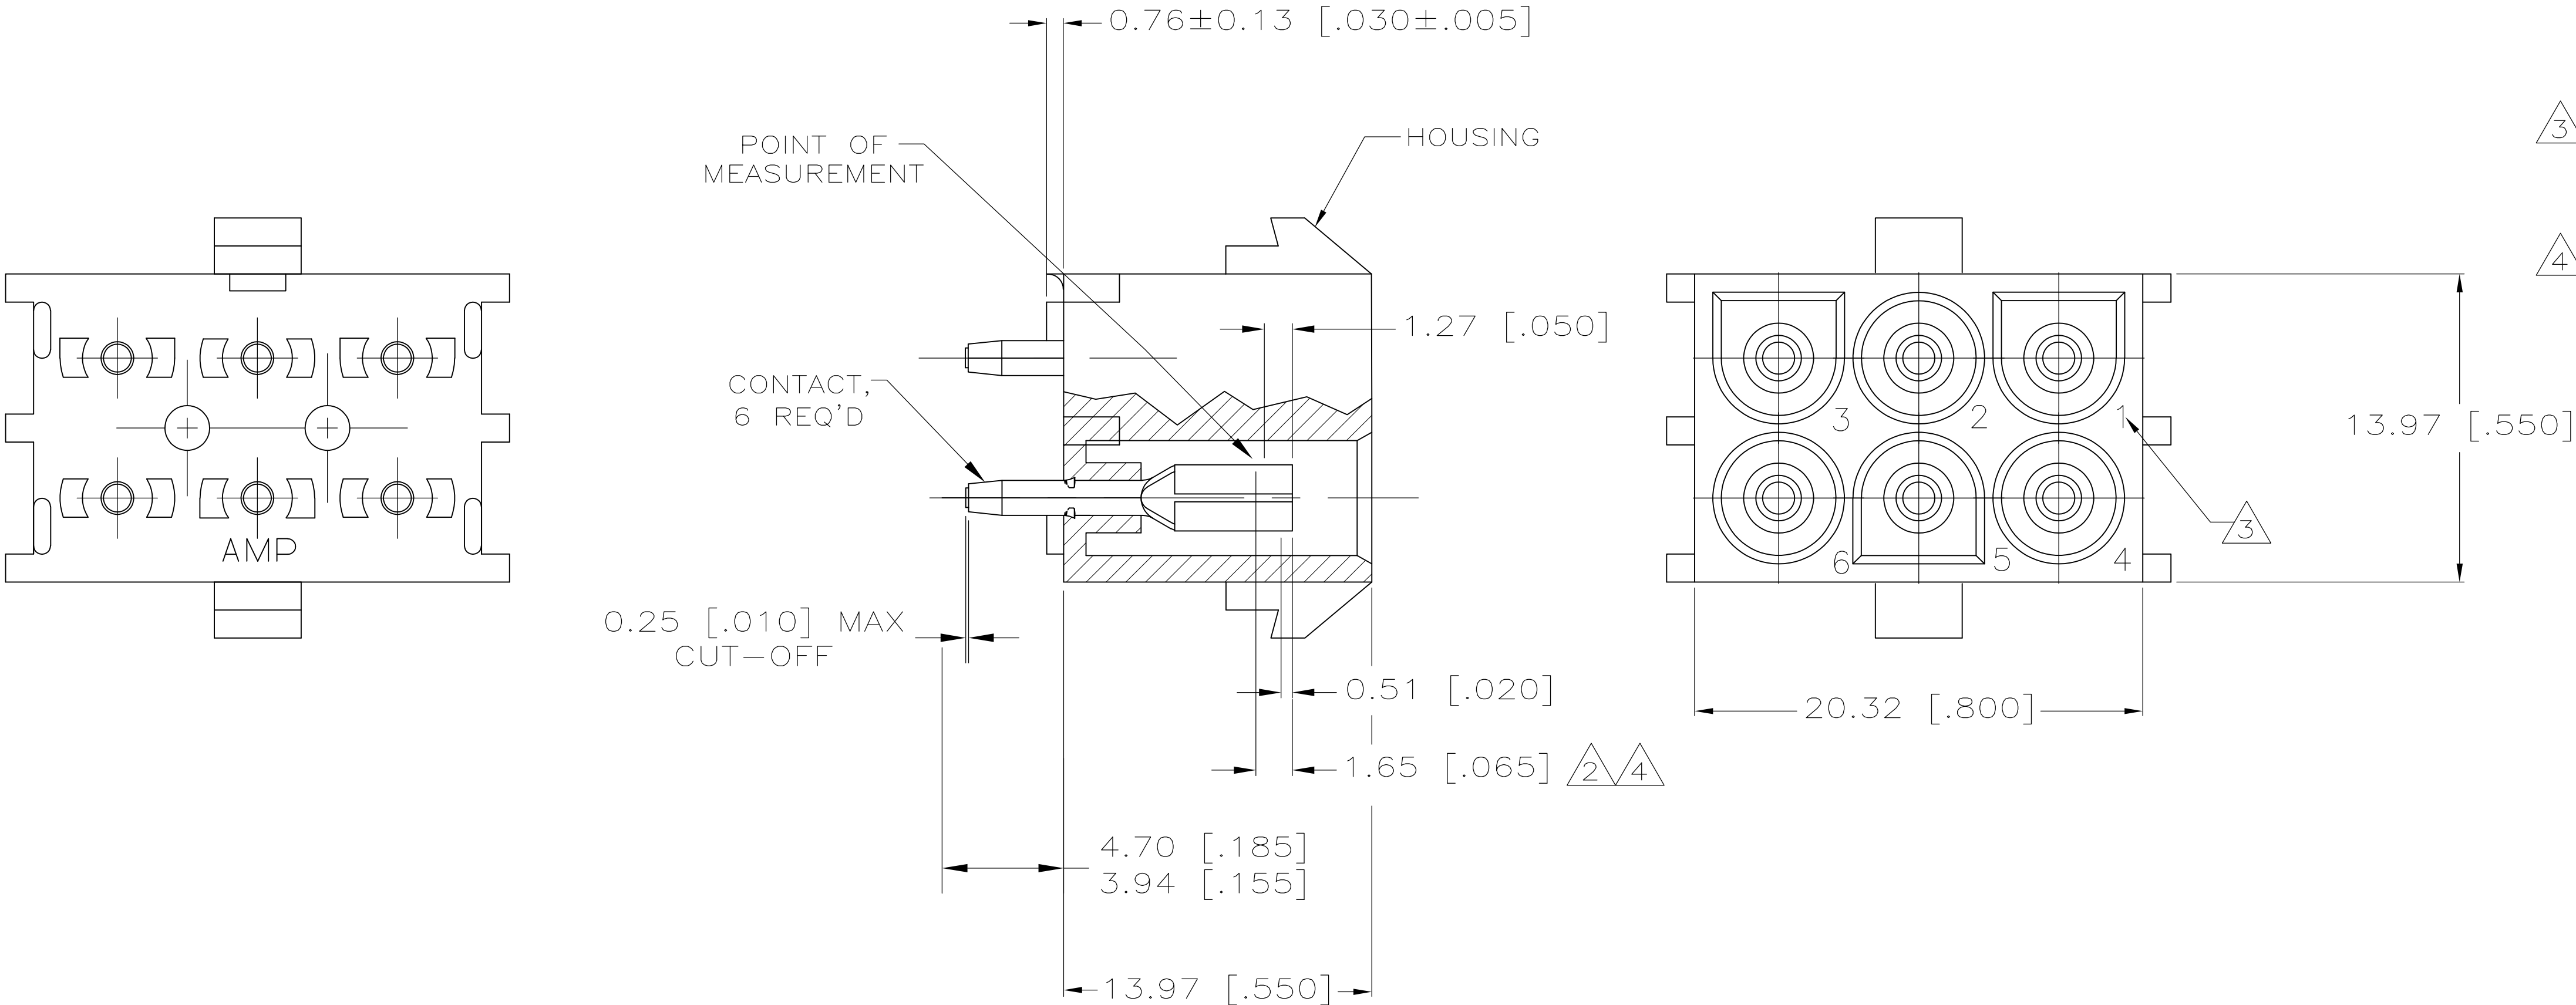

RECOMMENDED LAYOUT FOR 1.58 [.062] THICK PC BOARD

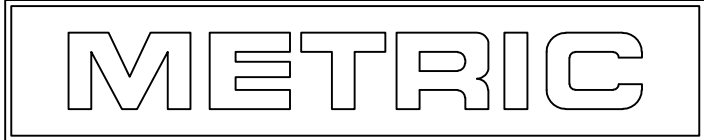

PH BRZ GOLD 4	NYLON,UL 94V-0	350827-4
PH BRZ GOLD 2	NYLON,UL 94V-0	350827-2
PH BRZ TIN	NYLON,UL 94V-0	350827-1
CONTACT	HOUSING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 11OCT2005	TE Connectivity	
		OK S. RIDGILL 11OCT2005		
DIMENSIONS: mm [INCHES]		APVD S. RIDGILL 11OCT2005	NAME	
		PRODUCT SPEC	6 CIRCUIT UNIVERSAL MATE-N-LOK (TM) P.C. BOARD SOCKET HEADER ASSEMBLY	
		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO	
		WEIGHT	A1 00779 C=350827	
MATERIAL SEE TABLE		CUSTOMER DRAWING	RESTRICTED TO	
		SCALE 5:1	SHEET 1 OF 1 REV M1	