


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00		AC	REV; ECO-14-004910	26FEB2014	GG	JC

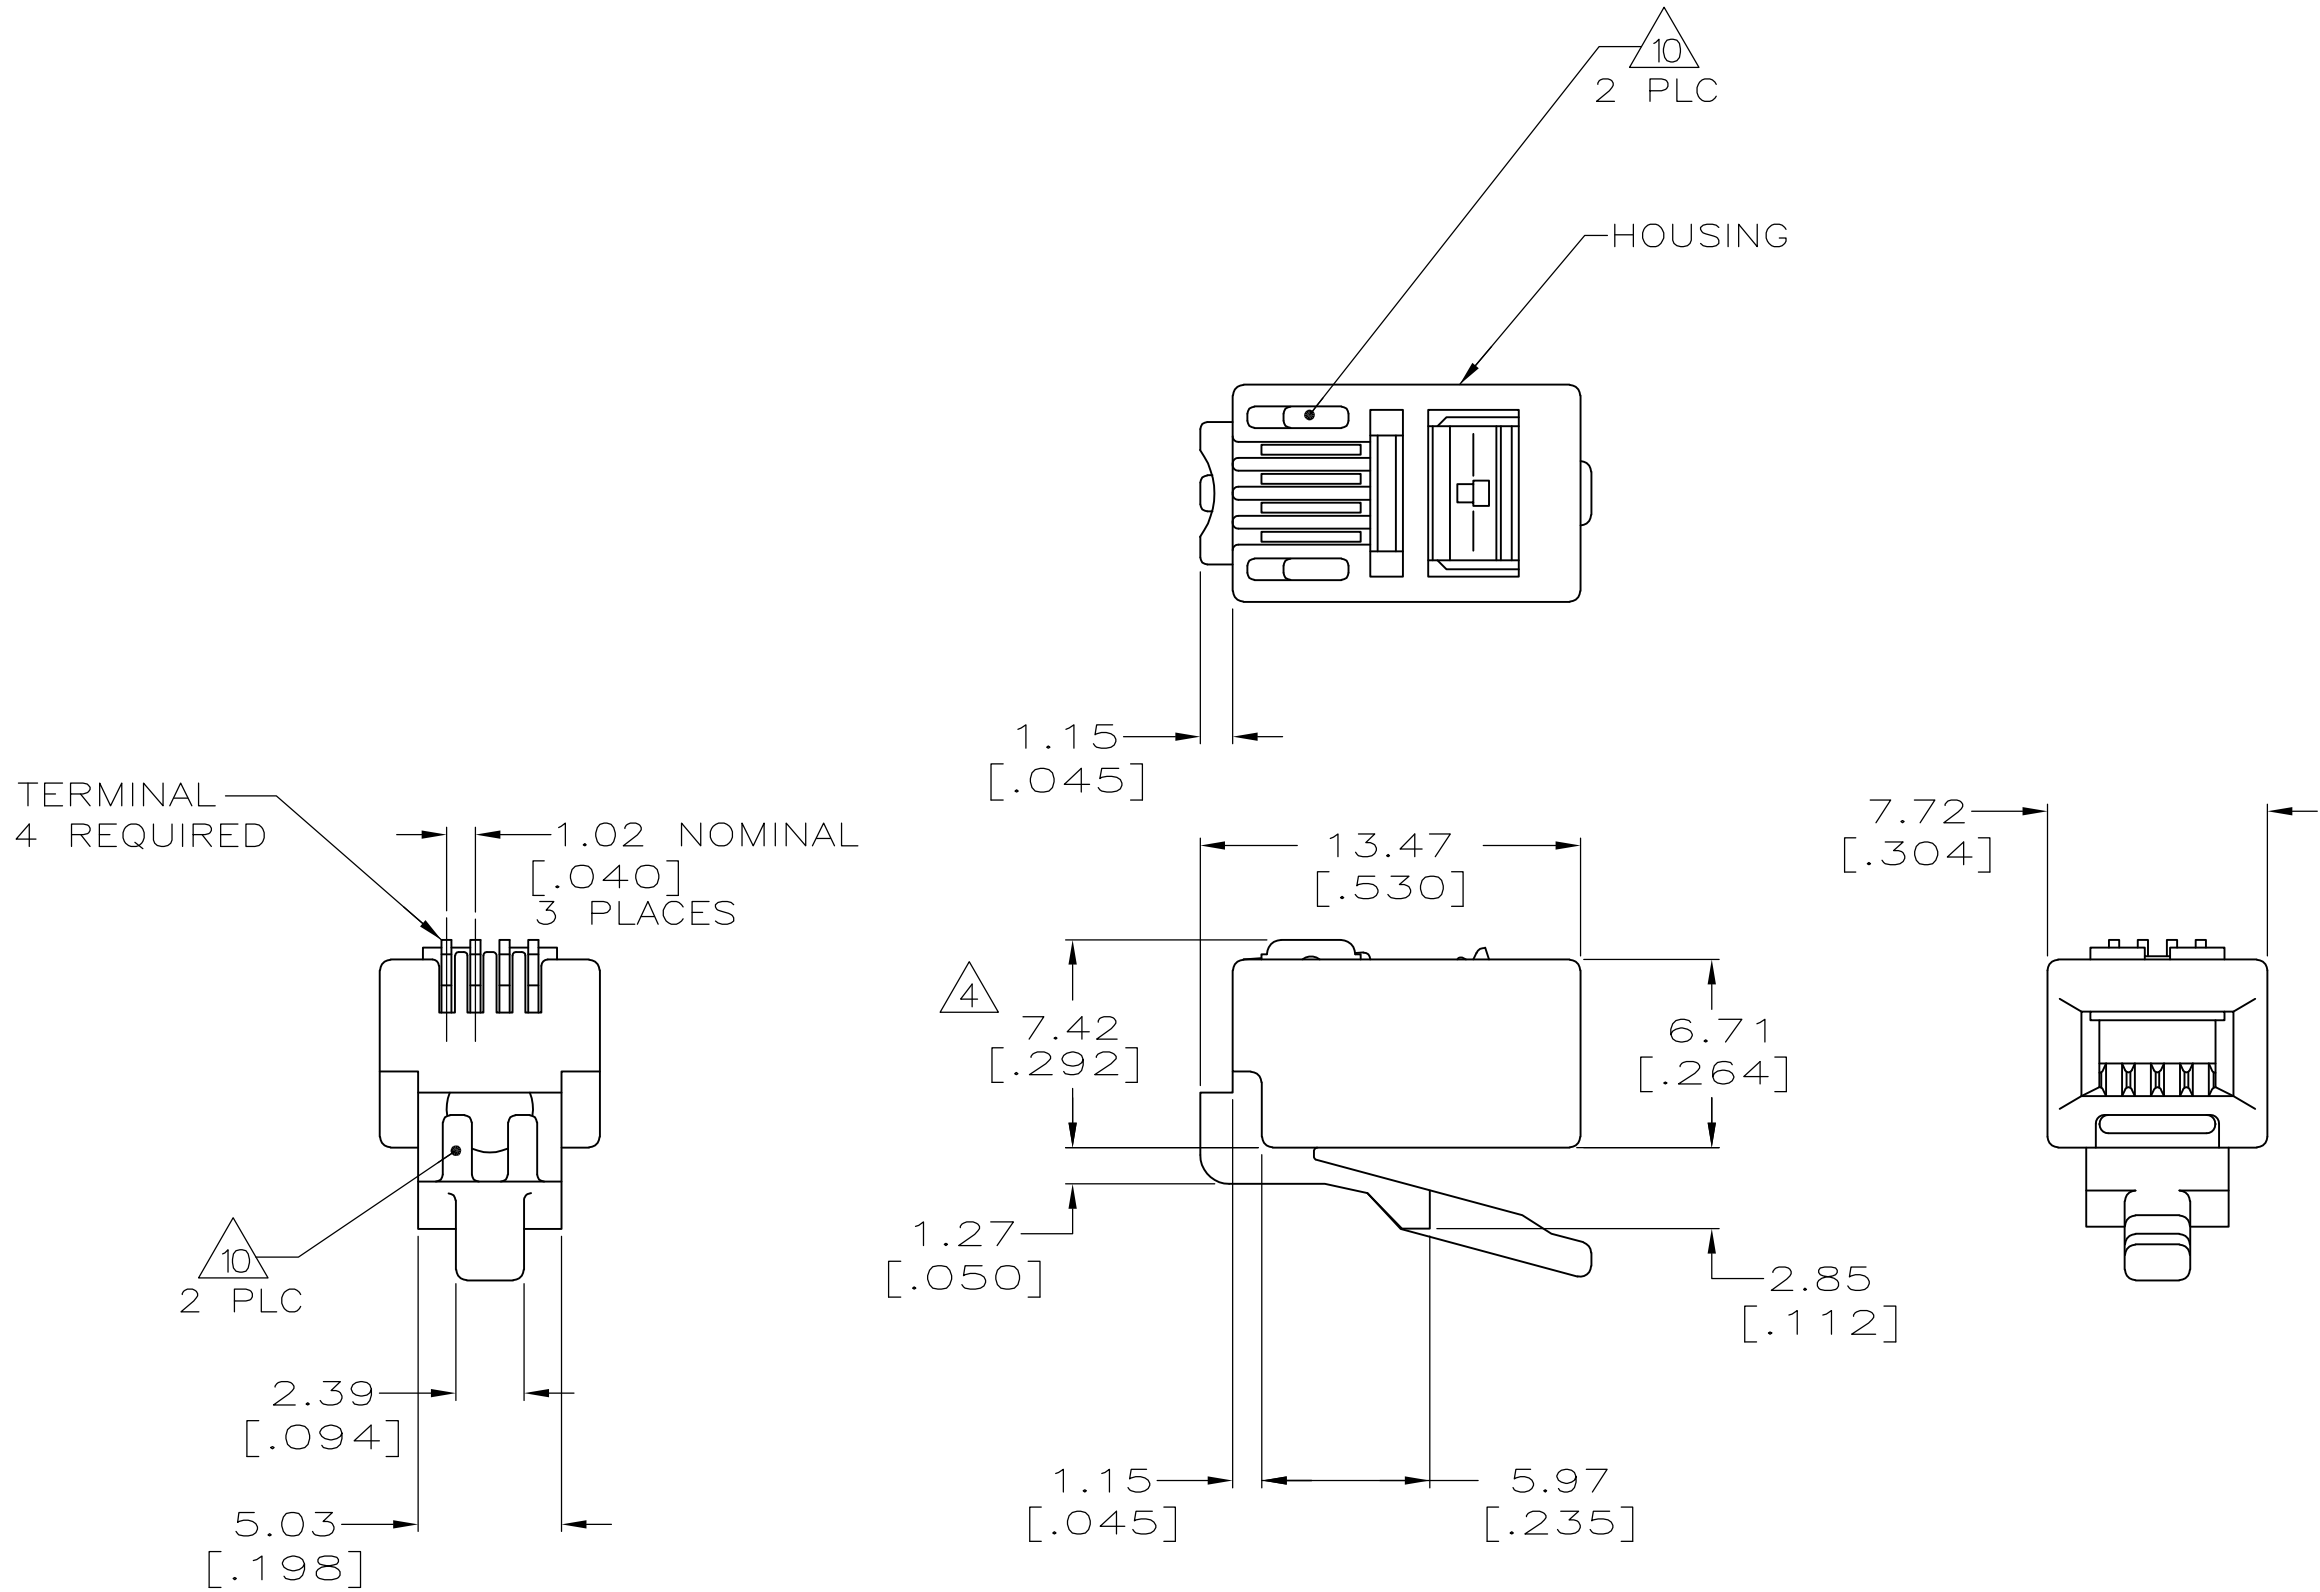

1. DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
2. MATERIAL: HOUSING-POLYCARBONATE, CLEAR. TERMINAL - .36 [.014] THICK PHOSPHOR BRONZE PLATED WITH .178 μ m[.000007] THICK GOLD IN LOCALIZED PLATE AREA, OVER .762 μ m[.000030] THICK PALLADIUM NICKEL IN LOCALIZED PLATE AREA OVER 2.54 μ m[.000100] THICK NICKEL ON ENTIRE CONTACT.
3. PLUG WILL ACCEPT 26 OR 28 AWG STRANDED WIRE, 0.99[.039] MAX INSULATION DIAMETER, WITH A 2.29 X 4.83 [.090 X .190] OVAL JACKET.
4. TERMINATED DIMENSION 6.15[.242] MAXIMUM.
6. 10,000 ASSEMBLES PER PACKAGE.
7. 1000 ASSEMBLIES PER PACKAGE.
8. 100 ASSEMBLIES PER PACKAGE.

SUPERSEDED BY 5-641334-2

8	5-641334-3
7	5-641334-2
6	5-641334-1
REELED 10	641334-1
PACKAGED	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YTP/UTA 8-31-93	TE Connectivity	
DIMENSIONS: mm[INCHES]		CHK C.WHITT 9-15-93		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	NAME	
0 PLC ± - 1		PRODUCT SPEC	MODULAR PLUG ASSEMBLY, 4 POSITION, HANDSET	
1 PLC ± - 2		108-1163		
2 PLC ± - 3		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO	
3 PLC ± - 4		114-6016	A2 00779 C-641334	
4 PLC ± -		WEIGHT	RESTRICTED TO	
ANGLES ± -		-	-	
FINISH		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV AC	