
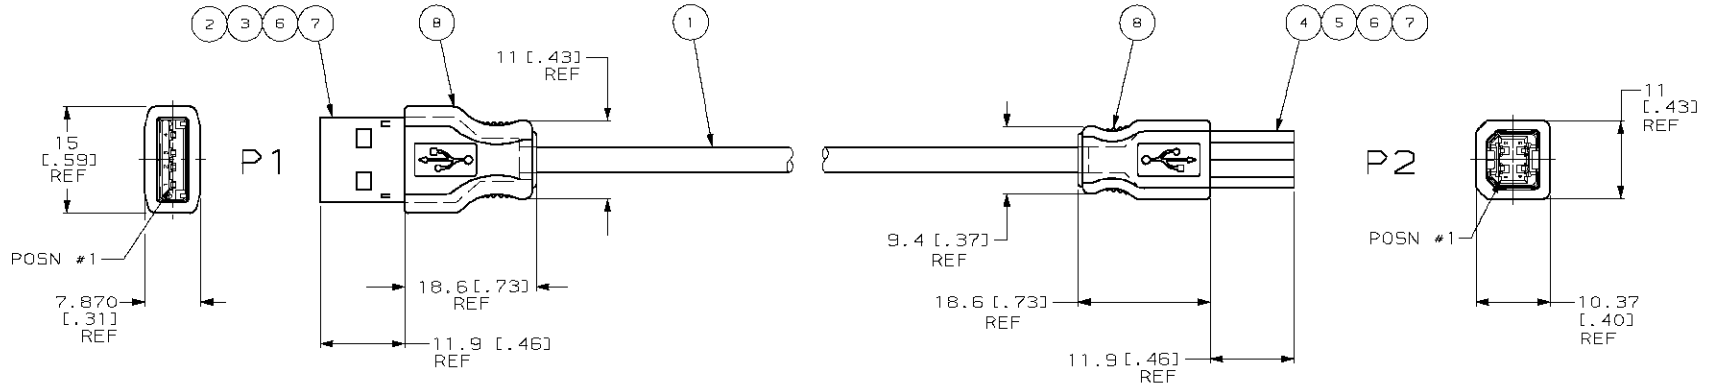


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APPD
0		REL PER PR 98-7922-001-02	5/26/98	KJH	KB
A		REL PER OB20-0850-98	8/7/98	DGG	KB
B		REVISED PER OB20-0515-99	06/18/99	MM	LW

WIRING DIAGRAM			
P1	WIRE COLOR	P2	AWG
1	RED	1	24
2	WHITE	2	28
3	GREEN	3	28
4	BLACK	4	24
SHELL	SHIELD	SHELL	-

- 1 MATERIAL:
FRONT AND REAR SHELLS- STEEL.
HOUSING- UL 94V-0 RATED THERMOPLASTIC, BLACK.
OVERMOLD - PVC, COLOR: FROST WHITE.
- 2 FINISH:
FRONT AND REAR SHELLS - TIN PLATED.
- 3. FINAL CABLE ASSEMBLY LENGTH LONGER THEN 2000mm
EXCEEDS MAX LENGTH @ MAX CONDITIONS PER
UNIVERSAL SERIAL BUS SPEC PARAGRAPH 6.4.

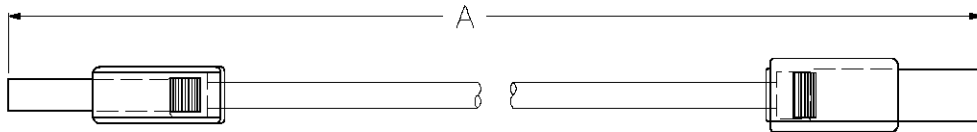

974327-2	1500 ⁺⁰ ₋₅₀
974327-1	2000 ⁺⁰ ₋₅₀
PART NUMBER	A

AR	AR	GR	OVERMOLD, PVC, WHITE	8
AR	AR	GR	FLUX, KESTER 951	7
AR	AR	GR	SOLDER, FLUX CORE	6
1	1	PC	PLUG SHELL, USB, TYPE B	5
1	1	PC	HOUSING, PLUG, TYPE B, USB	4
1	1	PC	PLUG SHELL, USB, TYPE A	3
1	1	PC	HOUSING, PLUG, TYPE A, USB	2
AR	AR	mm	CABLE	1
-2	-1	U/M	DESCRIPTION	ITEM NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DRAWN K. BEAVER	5/26/98	AMP AMP Incorporated Harrisburg, PA 17105-3608
CHECKED K. BEAVER	5/26/98	
APPROVED K. BEAVER	5/26/98	NAME USB CONSORTIUM, 4 POS, PLUG, TYPE A TO TYPE B, 28/24 AWG
DIMENSIONS mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED	PRODUCT SPEC 108-1586
0 PLC ±-	1 PLC ±-	APPLICATION SPEC
2 PLC ±-	3 PLC ±-	SIZE CAGE CODE DRAWING NO
4 PLC ±-	ANGLES ±-	A2 00779 C-974327
MATERIAL	FINISH	RESTRICTED TO
-	-	WEIGHT
		SCALE NTS
		SHEET 1 OF 1
		REV B

CUSTOMER DRAWING