

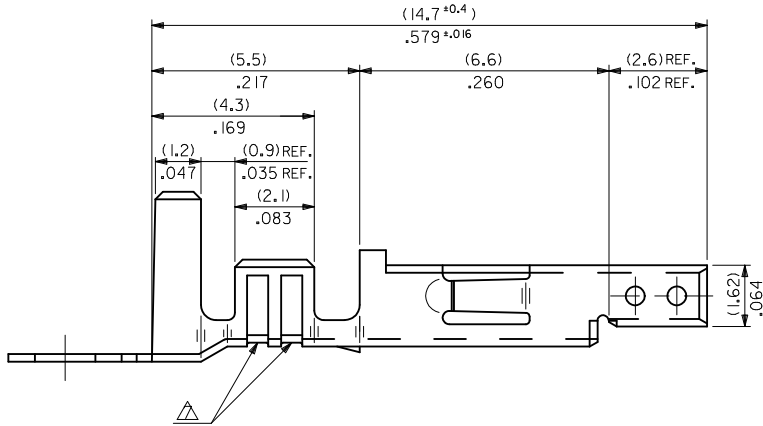
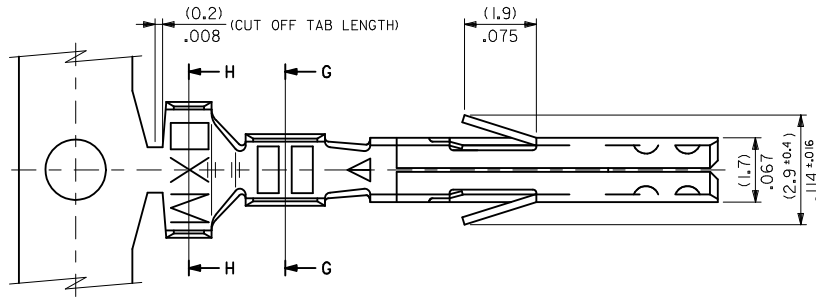





NOTES

1. MATERIAL: SEE CHART.
2. FINISH: SEE CHART.
3. PRODUCT SPECIFICATION: PS-5556-001, PS-5556-002, PS-5556-003.
4. PACKAGING SPECIFICATION: PK-5556-001 FOR CHAIN TERMINALS.
PK-5556-003 FOR LOOSE TERMINALS.
5. MATES WITH: 5558, 5566, 5569, 30069, 30070, 42440, 42404, 43879, 43810, 44068.
6. APPLICABLE HOUSING: 5557, 30067, 44516, OR 42474.
7. THE NUMBER OF SERRATIONS TO BE ONE FOR WIRE RANGE #22-28.
8. WHEN TERMINALS ARE INSTALLED IN THE HOUSING THE WIRES ARE TO BE DRESSED IN SUCH A MANNER TO ALLOW THE TERMINALS TO FLOAT FREELY IN THE POCKET.
9. THIS TERMINAL IS DESIGNED FOR SINGLE WIRE CRIMPING.
10. PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.



UPDATE VIEW EC NO: UCP2011-2362 DRWN: JAGUILAR 2011/02/09 CHKD: JIBELL 2011/02/09 APPR: FSMITH 2011/02/21	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN	SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	MINI FIT JR OVERALL TIN FEMALE CRIMP TERMINAL	
			mm	INCH	DRAWN BY	DATE				
			4 PLACES ± ---	± ---	HIRAMOTO	1991/05/18				
			3 PLACES ± ---	± .008	CHECKED BY	DATE				
K1	REV	DESCRIPTION	2 PLACES ± 0.2	± .008	FUKSHIMA	1998/11/09	MOLEX INCORPORATED	SD-5556****	1 OF 2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
			1 PLACE ± 0.2	± ---	APPROVED BY	DATE				
			ANGULAR ± 3 °		FSMITH	2011/02/21				
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART					

	13	12	11	10	9	8	7	6	5	4	3	2	1	
J														J
I		TIN OVER NICKEL PLATED PHOSPHOR BRONZE	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	Ø (3.1) .122 MAX.	# 16	39-00-0119	5556 PBS3L	LOOSE	
			(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	Ø (0.9-1.8) .035-.071	#22-28	▲ -0118	▲ PBS3	CHAIN	
			(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	Ø (1.3-3.1) .051-.122	# 18-24	-0117	PBS2L	LOOSE	
			-0116	PBS2	CHAIN									
H		TIN PLATED PHOSPHOR BRONZE	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	Ø (3.1) .122 MAX.	# 16	-0115	PBSL	LOOSE	
			(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	Ø (0.9-1.8) .035-.071	#22-28	-0114	PBS	CHAIN	
			-0080	PBT3L	LOOSE									
			-0079	PBT3	CHAIN									
G		TIN OVER NICKEL PLATED BRASS	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	Ø (3.1) .122 MAX.	# 16	-0066	PBT2L	LOOSE	
			(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	Ø (0.9-1.8) .035-.071	#22-28	-0065	PBT2	CHAIN	
			(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	Ø (1.3-3.1) .051-.122	# 18-24	-0060	PBTL	LOOSE	
			-0059	PBT	CHAIN									
F		TIN OVER COPPER PLATED BRASS	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	Ø (3.1) .122 MAX.	# 16	-0113	S3L	LOOSE	
			(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	Ø (0.9-1.8) .035-.071	#22-28	-0112	S3	CHAIN	
			(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	Ø (1.3-3.1) .051-.122	# 18-24	-0111	S2L	LOOSE	
			-0110	S2	CHAIN									
E		MATERIAL	(0.9) .035	(4.5) .177	(3.6) .142	(0.6) .024	(2.7) .106	(2.3) .091	Ø (3.1) .122 MAX.	# 16	-0109	SL	LOOSE	
			(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	Ø (0.9-1.8) .035-.071	#22-28	-0108	S	CHAIN	
			-0078	T3L	LOOSE									
			-0077	T3	CHAIN									
D			(0.6) .024	(2.3) .091	(2.3) .091	(0.4) .016	(1.65) .065	(1.8) .071	Ø (0.9-1.8) .035-.071	#22-28	-0047	T2L	LOOSE	
			(0.9) .035	(4.5) .177	(3.6) .142	(0.5) .020	(2.3) .091	(1.9) .075	Ø (1.3-3.1) .051-.122	# 18-24	-0046	T2	CHAIN	
			▼ -0039	▼ TL	LOOSE									
			39-00-0038	5556 T	CHAIN									
C			FORM											
B														
A														