

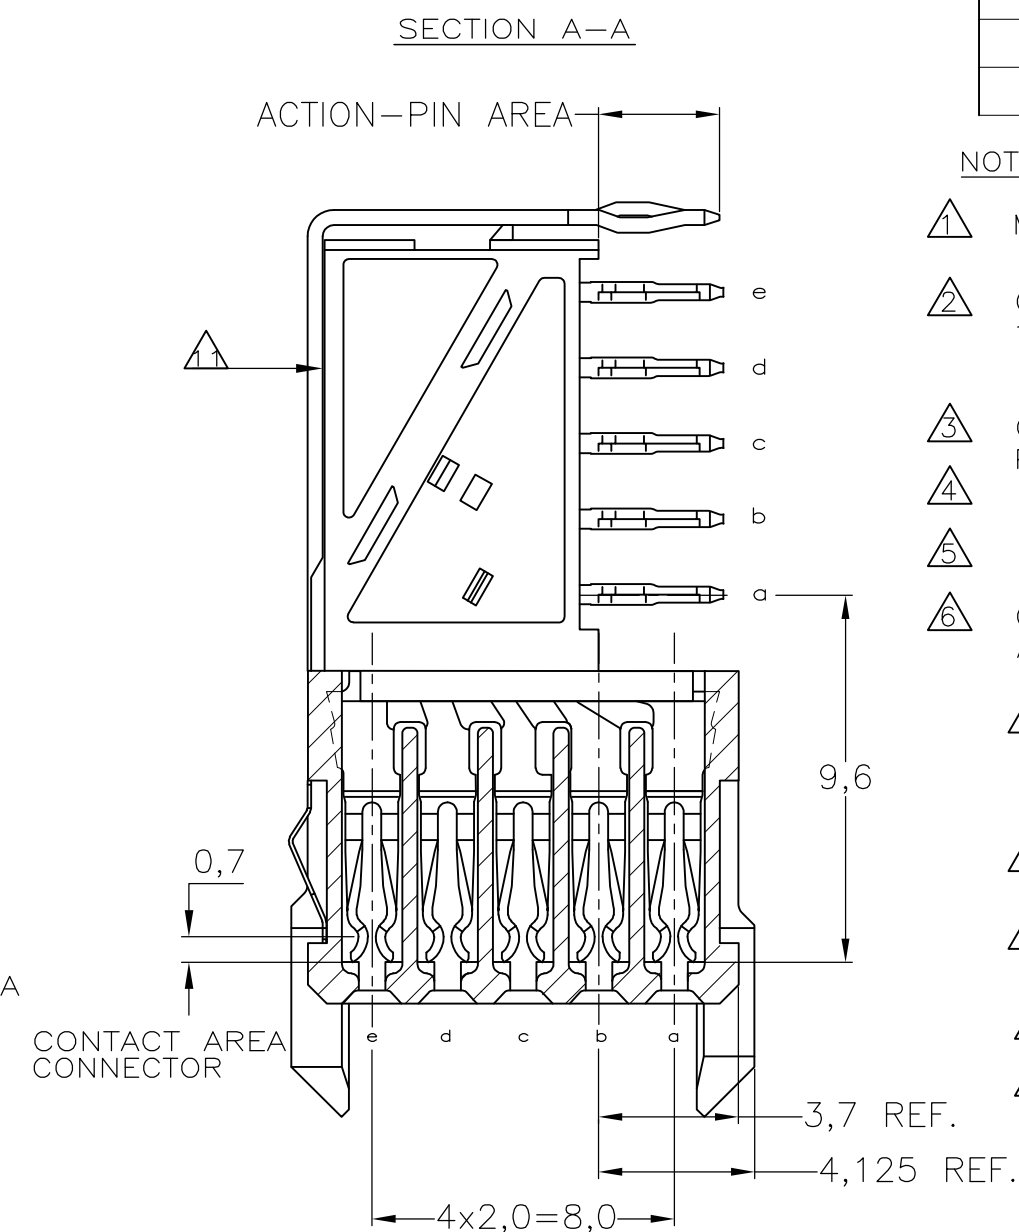
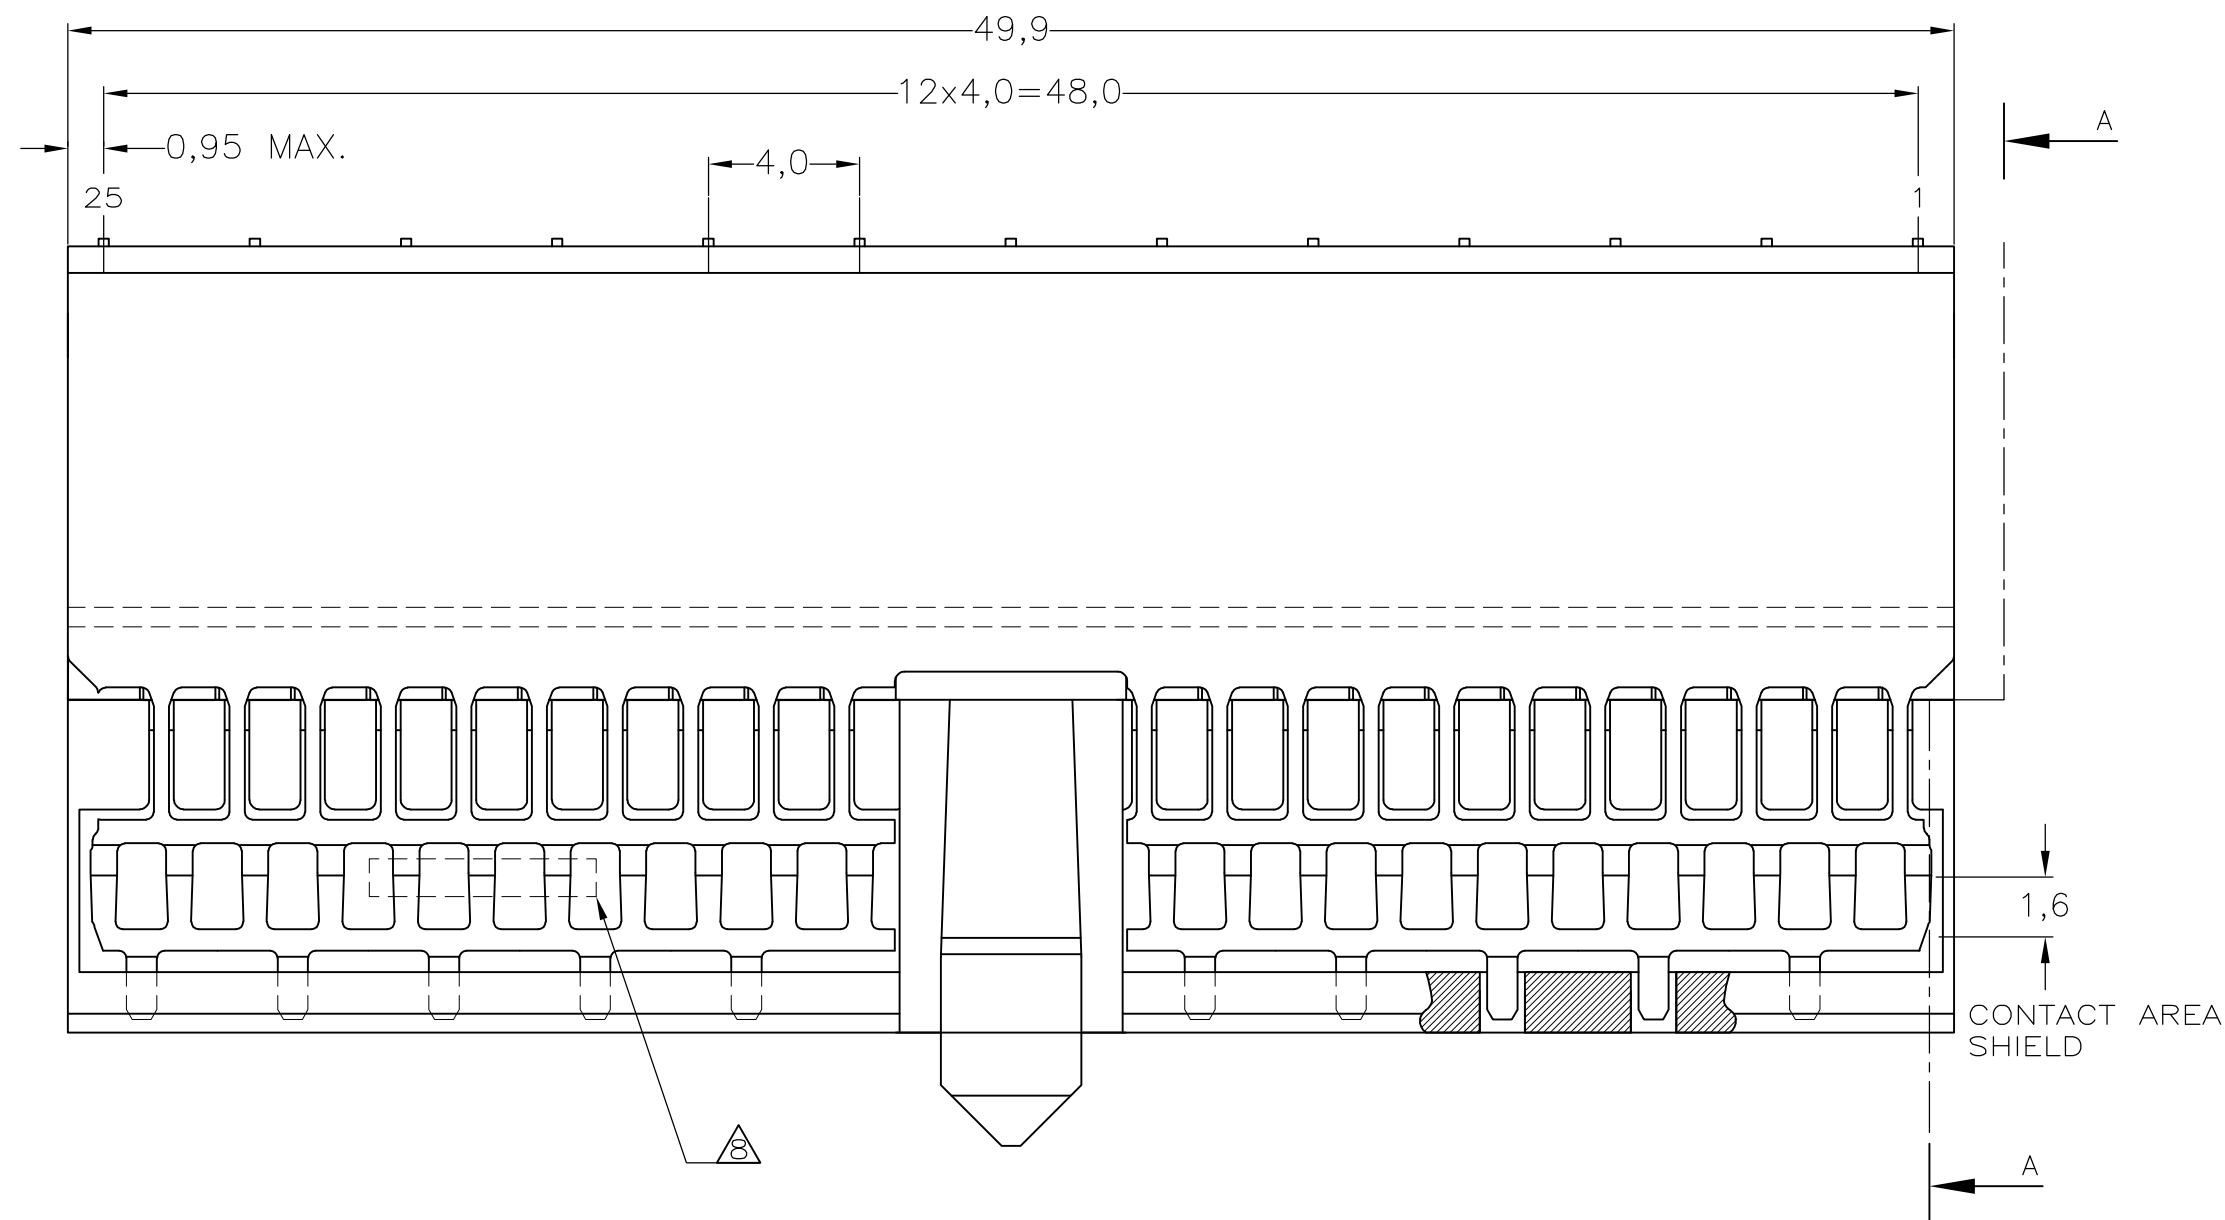


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
H	—		H4	REVISED PER ECO-10-001916	02FEB2010	JY	SY	
			J	ECR-10-018652	10SEP10	SW	MQW	

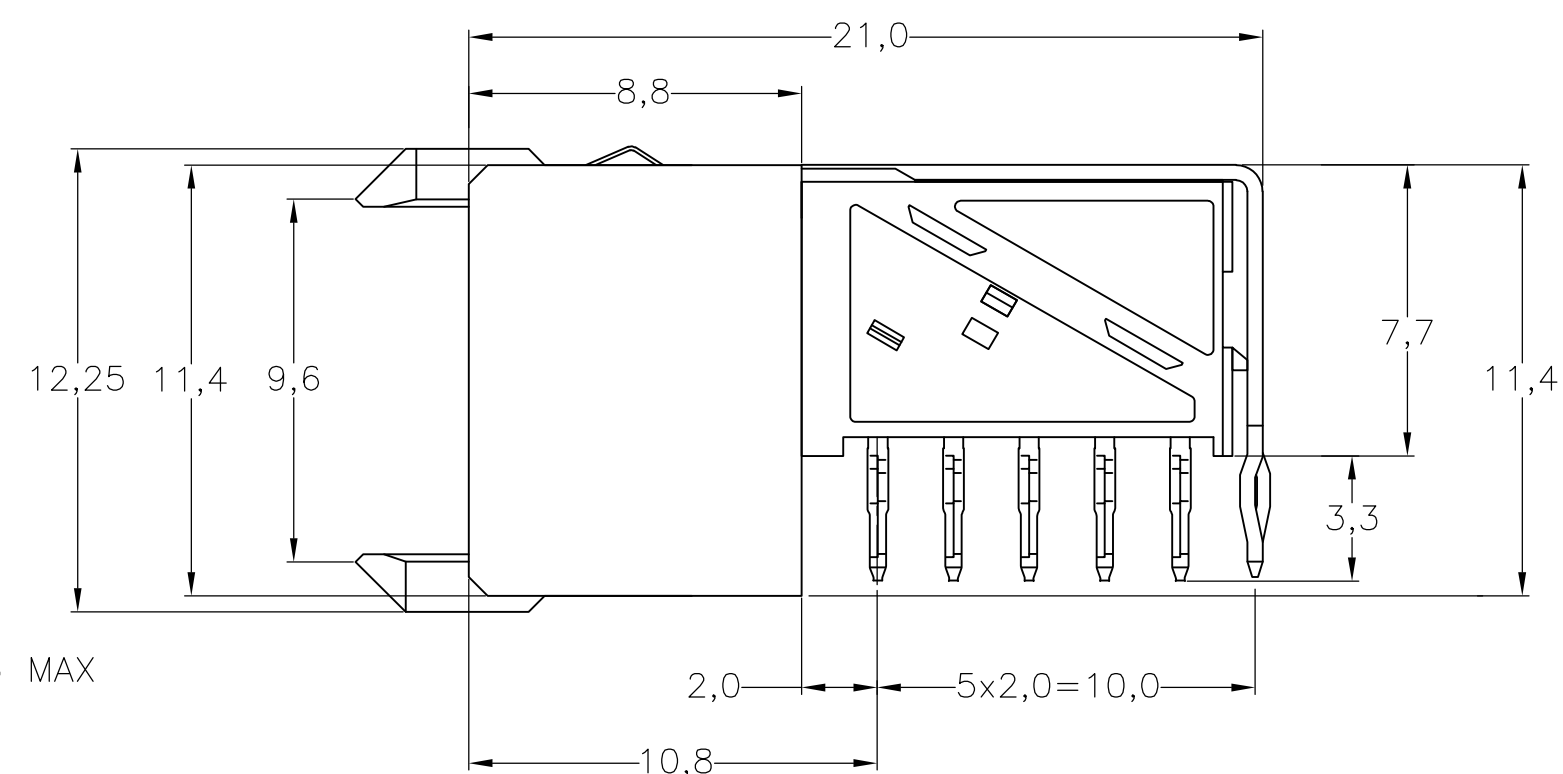

NOTES:

- ① MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
 - ② GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.
 - ③ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
 - ④ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
 - ⑤ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA
GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - ⑥ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.
 - ⑦ PLATING SHIELD:
CONTACT AREA: 0,76μm Au MIN.
ACTION PIN : 0,5μm SnPb MIN.
REMAINDER : Ni
 - ⑧ ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
 - ⑨ HOLE PATTERN FOR FEMALE CONNECTOR TYPE A
110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - ⑩ ROW "f" 13 PLATED THROUGH HOLES FOR UPPERSHIELD
 - ⑪ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE
- REF.
5. REF. ⑫ AREA RESERVED FOR KEYING PART (BASIC P.N. 100526)
13 BASIC P.N. LOWERSHIELD: 338108
⑭ 0.76μm MIN GOLD PLATING AT MATING SURFACES.

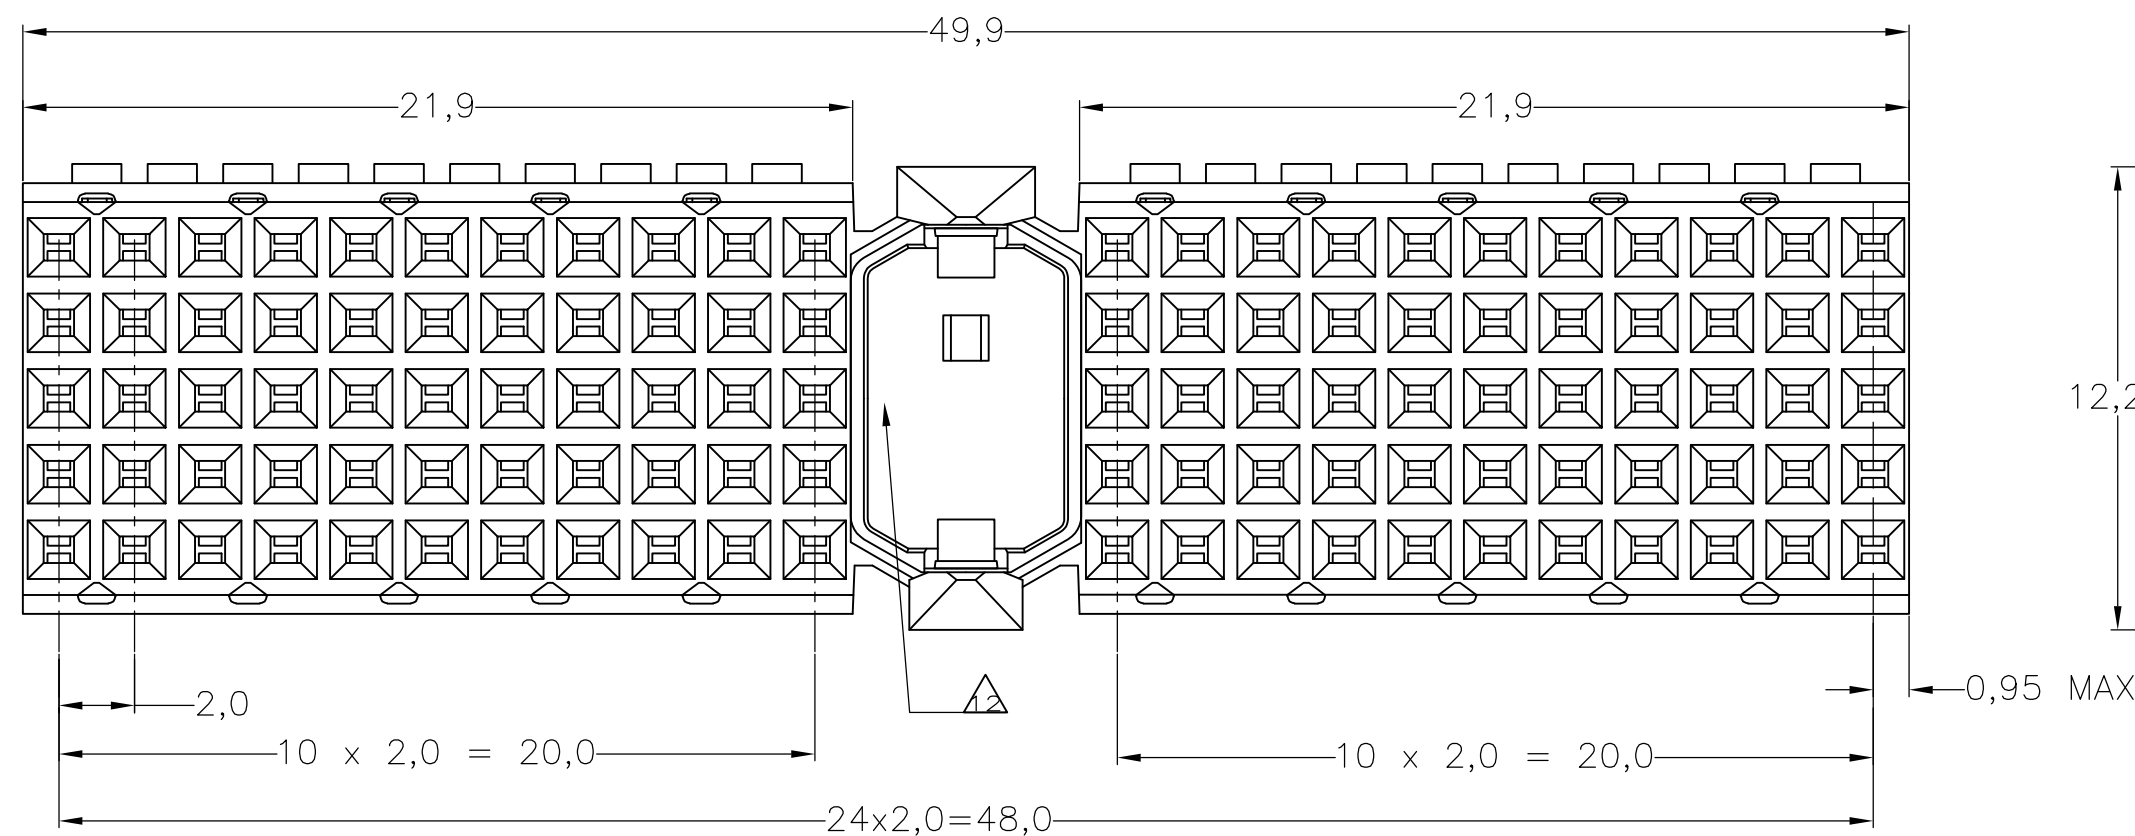

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT
SCALE 2,5:1

Figure 1: Dimensions of P.C.B. in mm.


SEQUENCE COLUMNS ACCORDING CompactPCI	1	11	15	25
SEQUENCE COLUMNS ACCORDING IEC 61076-4-101 AND TYCO ELECTRONICS / AMP	25	15	11	1

Dimensions and Hole Layout:

- Overall width: $12 \times 48.0 = 576.0$ mm
- Overall height: $10 \times 2.0 = 20.0$ mm
- Hole spacing (horizontal): $10 \times 20.0 = 200.0$ mm
- Hole spacing (vertical): $4 \times 2.0 = 8.0$ mm
- Edge of P.C. BOARD
- ALL HOLES

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

AMP 1471-9 REV 31MAR2000

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN		20JAN97		 Tyco Electronics Corporation s-HertogenBosch, Netherlands,									
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		NAME									
		0-PLC ± — 1-PLC ± — ±0.2 2-PLC ± — 3-PLC ± — 4-PLC ± — ANGLES ± —		PRODUCT SPEC 108-19082		Z-PACK 2MM HM TYPE A - 25 COLUMNS PRE-SHIELDED RECEPTACLE									
MATERIAL		FINISH		APPLICATION SPEC 114-19029		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO						
—		—		WEIGHT —		A2	00779	C-352068	—						
CUSTOMER DRAWING								SCALE	NTS	SHEET	1	OF	1	REV	

352068

B

B

A