





Heyco® Snap Bushings

Mounting Diameter: 0.812" to 6.000"

Panel Dimensions				Part No.		Description	Part Dimensions					
Maximum Thickness		Mounting Hole Diameter		Black	White		A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.125	3,2	.812	20,6	2100	2101	SB 812-9	.562	14,3	.890	22,6	.406	10,3
.125	3,2	.812	20,6	2103	2104	SB 812-10	.625	15,9	.890	22,6	.406	10,3
.125	3,2	.875	22,2	2110	2111	SB 875-6	.375	9,5	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2113	2114	SB 875-7	.437	11,1	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2116	2117	SB 875-8	.500	12,7	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2120	2121	SB 875-9	.562	14,3	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2123	2124	SB 875-10	.625	15,9	.953	24,2	.453	11,5
.125	3,2	.875	22,2	2126	2127	SB 875-11	.687	17,5	.953	24,2	.453	11,5
.125	3,2	1.000	25,4	2140	2141	SB 1000-12	.766	19,4	1.125	28,6	.453	11,5
.125	3,2	1.093-1.125	27,8-28,6	2160	2161	SB 1093-13	.812	20,6	1.218	30,9	.453	11,5
.125	3,2	1.093-1.125	27,8-28,6	2163	2164	SB 1093-14	.875	22,2	1.218	30,9	.453	11,5
.125	3,2	1.093-1.125	27,8-28,6	2166	2167	SB 1093-15	.937	23,8	1.218	30,9	.453	11,5
.125	3,2	1.187	30,2	2182	2183	SB 1187-15	.937	23,8	1.312	33,3	.453	11,5
.125	3,2	1.250	31,8	2198	2199	SB 1250-15	.937	23,8	1.359	34,5	.453	11,5
.125	3,2	1.250	31,8	2201	2202	SB 1250-16	1.000	25,4	1.310	33,2	.453	11,5
.125	3,2	1.375	34,9	2207	2208	SB 1375-14	.875	22,2	1.490	37,3	.453	11,5
.125	3,2	1.375	34,9	2210	2211	SB 1375-16	1.014	25,8	1.490	37,3	.453	11,5
.125	3,2	1.500	38,1	2233	2234	SB 1500-17	1.062	27,0	1.609	40,9	.453	11,5
.125	3,2	1.500	38,1	2236	2237	SB 1500-18	1.125	28,6	1.609	40,9	.453	11,5
.125	3,2	1.500	38,1	2240	2241	SB 1500-21	1.312	33,3	1.609	40,9	.453	11,5
.125	3,2	1.750	44,5	2300	2301	SB 1750-22	1.375	34,9	1.875	47,6	.453	11,5
.125	3,2	2.000	50,8	2400	2401	SB 2000-26	1.640	41,6	2.125	54,0	.453	11,5
.125	3,2	2.000	50,8	2406	—	SB 2000-28	1.750	44,5	2.125	54,0	.453	11,5
.250	6,4	2.093	53,1	2415	2416	SB 2.093-29	1.813	46,0	2.350	59,7	.720	18,3
.250	6,4	2.250	57,2	2417	2418	SB 2.250-29	1.860	47,1	2.480	63,1	.720	18,3
.250	6,4	2.500	63,5	2420	2421	SB 2.500-31	1.970	50,0	2.660	67,5	.720	18,3
.250	6,4	3.000	76,2	2461	2462	SB 3.000-39	2.470	62,7	3.160	80,2	.720	18,3
.250	6,4	3.375	85,7	2407	2408	SB 3.375-45	2.812	71,4	3.660	92,9	.720	18,3
.250	6,4	3.500	88,9	2470	2471	SB 3.500-47	2.940	74,7	3.660	93,0	.720	18,3
.250	6,4	4.000	101,6	2479	2480	SB 4.000-55	3.470	88,1	4.150	105,4	.720	18,3
.250	6,4	5.000	127,0	2409	2410	SB 5.000-70	4.375	113,8	5.219	132,6	.740	18,8
.250	6,4	6.000	152,4	2484	2485	SB 6.000-86	5.375	139,2	6.219	157,9	.740	18,8

Standard color black. Consult Heyco for white and other colors.

Locking fingers in fractional increments up to the maximum panel thickness.



Material

6/6 Nylon

Certifications



Recognized under the Component Program of Underwriters' Laboratories, File E15331



Certified by Canadian Standards Association, File LR8919

Flammability Rating

94V-2

Material Temperature Index 257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick
Specs




Heyco® Metric Snap Bushings

- Converts raw-edged holes to smooth ones.
- Locking fingers snap into holes with fingertip pressure.
- Withstands a push back force of 35 pounds.
- Multiple sizes for use in .630" (16,0 mm) to 1.260" (32,0 mm) diameter holes. For other metric sizes, consult Heyco.
- Locks firmly into panel up to .098" (2,5 mm) thick.
- Same design as Heyco Snap Bushings but designed for metric sized mounting holes.

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS						
Maximum Thickness		Mounting Hole Diameter				Black	A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.098	2,5	.630	16,0	2142	MSB 16-12	.472	12,0	.728	18,5	.406	10,3	
.098	2,5	.787	20,0	2144	MSB 20-16	.630	16,0	.890	22,6	.406	10,3	
.098	2,5	.984	25,0	2146	MSB 25-19	.748	19,0	1.094	27,8	.453	11,5	
.098	2,5	1.260	32,0	2148	MSB 32-26	1.023	26,0	1.375	34,9	.453	11,5	

Standard color black. Consult Heyco for white and other colors.



Quick
Specs

Material
Certifications

6/6 Nylon

Recognized under the Component Program of Underwriters' Laboratories File E15331

Certified by the Canadian Standards Association File LR8919

Flammability Rating

94V-2

Material Temperature Index

257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)




Heyco® Thick Panel Snap Bushings

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Maximum Thickness in.	mm.	Mounting Hole Diameter in.	mm.			A Inside Diameter		B Head Diameter		C Overall Height	
.250	6,4	.500	12,7	3126	SBT-500-6	.391	9,9	.578	14,7	.562	14,3
.250	6,4	.875	22,2	3104	SBT-875-11	.687	17,5	.953	24,2	.562	14,3
.250	6,4	1.000	25,4	3108	SBT-1000-12	.766	19,4	1.125	28,6	.562	14,3
.250	6,4	1.093- 1.125	27,8- 28,6	3128	SBT-1093-15	.937	23,8	1.218	30,9	.562	14,3
.250	6,4	1.187	30,2	3130	SBT-1187-15	.937	23,8	1.312	33,3	.562	14,3
.250	6,4	1.250	31,8	3132	SBT-1250-16	1.000	25,4	1.310	33,2	.562	14,3
.250	6,4	1.375	34,9	3110	SBT-1375-16	1.000	25,4	1.500	38,1	.562	14,3
.250	6,4	1.500	38,1	3112	SBT-1500-21	1.312	33,3	1.620	41,2	.562	14,3
.250	6,4	1.750	44,5	3114	SBT-1750-22	1.375	34,9	1.875	47,6	.562	14,3
.250	6,4	2.000	50,8	3116	SBT-2000-26	1.625	41,3	2.125	54,0	.562	14,3

Standard color black. Consult Heyco for white and other colors.
Locking fingers in fractional increments up to the maximum panel thickness.

- For use in mounting panels up to 1/4" thick
- Converts raw-edged holes to smooth, neat, insulated holes.
- Locking fingers snap into holes with fingertip pressure.
- Withstands a push back force of greater than 35 pounds.
- Insulates and mechanically protects electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Available in multiple sizes for use in .500" (12,7 mm) to 2.000" (50,8 mm) diameter holes.

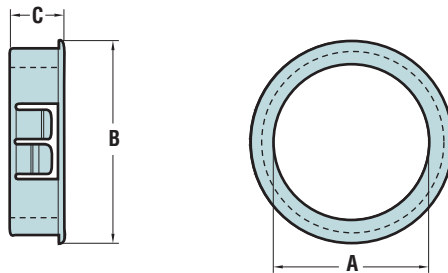

Material	6/6 Nylon
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331 Certified by Canadian Standards Association, File LR8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick
Specs




Heyco® Snub Bushings

- Provides insulation plus light strain relief.
- Suitable for 1/8" (3,2 mm) to 1/4" (6,4 mm) diameter cable, tubing or hose.
- The ID opens to accept the cable then closes firmly when installed into the mounting hole.

PANEL DIMENSIONS				APPROXIMATE CABLE DIAMETER ACCOMMODATED		PART NO.	DESCRIPTION	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter						A Head Diameter		B Overall Height	
in.	mm.	in.	mm.	in.	mm.	Black		in.	mm.	in.	mm.
.125	3,2	.375	9,5	1/8	3,2	2034	K 375-125	.46	11,7	.42	10,7
.125	3,2	.437	11,1	3/16	4,8	2047	K 437-187	.47	11,9	.44	11,2
.125	3,2	.500	12,7	1/4	6,4	2057	K 500-250	.56	14,2	.44	11,2

Standard color black. Consult Heyco for white and other colors.

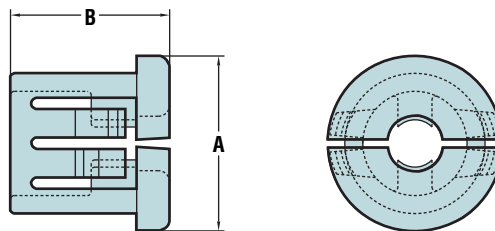

*Quick
Specs*

Material
Certifications



6/6 Nylon

Recognized under the Component Program of Underwriters' Laboratories, File E15331



Certified by Canadian Standards Association, File LR8919

Flammability Rating

94V-2

Material Temperature Index

257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)





Heyco® Shorty Bushings

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS					
Maximum Thickness		Mounting Hole Diameter		Black	White		A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.062	1,6	.187	4,7	2800	2801	B 187-125	.125	3,2	.250	6,4	.237	6,0
.062	1,6	.218	5,5	2859	2860	B 218-125	.125	3,2	.281	7,1	.237	6,0
.062	1,6	.281	7,1	2853	2854	B 281-218	.218	5,5	.343	8,7	.237	6,0
.062	1,6	.312	7,9	2810	2811	B 312-250	.250	6,3	.375	9,5	.237	6,0
.062	1,6	.343	8,7	2856	2857	B 343-218	.218	5,5	.406	10,3	.250	6,4
.062	1,6	.375	9,5	2803	2804	B 375-250	.250	6,3	.437	11,1	.250	6,4
.062	1,6	.406	10,3	2806	2807	B 406-281	.281	7,1	.468	11,9	.250	6,4
.062	1,6	.437	11,1	2813	2814	B 437-312	.312	7,9	.500	12,7	.250	6,4
.062	1,6	.468	11,9	2817	2818	B 468-343	.343	8,6	.53	13,5	.250	6,4
.062	1,6	.500	12,7	2820	2821	B 500-375	.375	9,5	.562	14,3	.250	6,4
.062	1,6	.531	13,5	2824	2825	B 531-406	.406	10,3	.593	15,1	.250	6,4
.062	1,6	.593	15,1	2833	2834	B 593-468	.468	11,9	.656	16,7	.250	6,4
.062	1,6	.625	15,9	2827	2828	B 625-500	.500	12,7	.703	17,9	.250	6,4
.062	1,6	.750	19,1	2836	2837	B 750-625	.625	15,9	.828	21,0	.250	6,4
.062	1,6	.781	19,8	2844	2845	B 781-625	.625	15,9	.859	21,8	.250	6,4
.062	1,6	.875	22,2	2850	2851	B 875-750	.750	19,0	.945	24,0	.250	6,4
.062	1,6	1.000	25,4	2847	2848	B 1000-875	.879	22,3	1.06	27,0	.250	6,4
.062	1,6	1.093	27,8	2838	2839	B 1093-969	.969	24,6	1.156	29,4	.255	6,5

Standard color black. Consult Heyco for white and other colors.

Locking fingers in fractional increments up to the maximum panel thickness.

- Available in multiple sizes for use in mounting holes from .187" (4,7 mm) to 1.093" (27,8 mm).
- Insulating feed-thru bushings for limited internal clearance (minimum .125" or 3,2 mm) applications.
- Insulates and isolates electric or telecommunications cables as well as low RPM shafts and push-pull rods.
- Locking fingers hold securely after only fingertip pressure snap-in installation.



Material
Certifications

6/6 Nylon
Recognized under the Component Program of Underwriters' Laboratories, File E15331

CSA Certified by Canadian Standards Association, File LR8919

Flammability Rating

94V-2

Material Temperature Index



257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

Quick
Specs



Heyco® Universal Bushings

- Flexible shutters adjust to accommodate and support any shape from .125" (3,2 mm) to a maximum diameter of 2.470" (62,7 mm).
- Absorbs vibration and cushions and insulates cables, tubing, hoses or shafts with limited internal clearance.
- Fingertip pressure snap-locks the bushing into its mounting hole.
- See Quick Specs on 4-8.



NEW!

NEW!

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS						
Maximum Thickness		Mounting Hole Diameter				Black	Maximum Inside Diameter		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.125	3,2	.500	12,7	2055	UB-500	.312	7,6	.600	15,2	.385	9,8	
.125	3,2	.625	15,9	2077	UB-625	.437	11,1	.718	18,3	.406	10,3	
.125	3,2	.750	19,1	2089	UB-750	.500	12,7	.844	21,4	.390	9,9	
.125	3,2	.812	20,6	2106	UB-812	.500	12,7	.890	22,6	.390	9,9	
.125	3,2	.875	22,2	2119	UB-875	.562	14,3	.937	23,8	.453	11,5	
.125	3,2	1.000	25,4	2137	UB-1000	.750	19,1	1.063	27,0	.453	11,5	
.125	3,2	1.093	27,8	2157	UB-1093	.812	20,6	1.160	29,5	.453	11,5	
.125	3,2	1.187	30,2	2153	UB-1187	.950	24,1	1.250	31,8	.453	11,5	
.125	3,2	1.250	31,8	2155	UB-1250	1.015	25,8	1.314	33,4	.453	11,5	
.125	3,2	1.375	34,9	2184	UB-1375	1.000	25,4	1.490	37,8	.453	11,5	
.125	3,2	1.500	38,1	2213	UB-1500	1.062	26,9	1.610	40,9	.450	11,4	
.125	3,2	1.750	44,5	2298	UB-1750	1.375	34,9	1.870	47,5	.465	11,8	
.125	3,2	2.000	50,8	2422	UB-2000	1.640	41,6	2.130	54,0	.490	12,4	
.250	6,35	2.500	63,5	2440	UB-2.500	1.970	50,0	2.660	67,6	.750	19,05	
.250	6,35	3.000	76,2	2460	UB-3.000	2.470	62,7	3.160	80,3	.750	19,05	

Standard color black. Consult Heyco for white and other colors.

Locking fingers in fractional increments up to maximum panel thickness.




Heyco® Shorty Universal Bushings

- Absorbs vibration and cushions and insulates cables, tubing, hoses or shafts with limited internal clearance.
- Fingertip pressure snap-locks the bushing into its mounting hole.
- Flexible shutters adjust to accommodate and support any shape from .125" (3,2 mm) to a maximum diameter of .820" (27,8 mm).
- See Quick Specs on 4-8.

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS						
Maximum Thickness		Mounting Hole Diameter				Black	Maximum Inside Diameter		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.	in.	mm.
.062	1,6	.500	12,7	2858	SUB 500	.312	7,6	.600	15,2	.250	6,4	
.062	1,6	.625	15,9	2861	SUB 625	.437	11,1	.729	18,5	.250	6,4	
.062	1,6	.750	19,1	2862	SUB 750	.500	12,7	.859	21,8	.250	6,4	
.062	1,6	.875	22,2	2863	SUB 875	.560	14,2	.937	23,8	.250	6,4	
.062	1,6	1.000	25,4	2864	SUB 1000	.750	19,0	1.063	27,0	.250	6,4	
.062	1,6	1.093	27,8	2158	SUB 1093	.820	27,8	1.156	29,4	.250	6,4	

Standard color black. Consult Heyco for white and other colors.





Heyco® Thick Panel Universal Bushings


PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Maximum Thickness		Mounting Hole Diameter				Black	Max. Inside Diameter		A Head Diameter		B Overall Height
in.	mm.	in.	mm.								
.250	6,4	.500	12,7	3001	UBT-500	.312	7,6	.600	15,2	.545	13,8
.250	6,4	.625	15,9	3118*	UBT-625	.437	11,1	.718	18,3	.550	14,0
.250	6,4	.750	19,0	3119*	UBT-750	.500	12,7	.844	21,4	.550	14,0
.250	6,4	.875	22,2	3120	UBT-875	.562	14,3	.937	23,8	.550	14,0
.250	6,4	1.000	25,4	3121	UBT-1000	.750	19,0	1.063	27,0	.550	14,0
.250	6,4	1.093	27,8	3002	UBT-1093	.812	20,6	1.156	29,4	.550	14,0
.250	6,4	1.375	34,9	3003	UBT-1375	1.000	25,4	1.490	37,8	.562	14,3
.250	6,4	1.500	38,1	3122	UBT-1500	1.062	26,9	1.610	40,9	.562	14,3

Standard color black. Consult Heyco for white and other colors.

Locking fingers in fractional increments up to the maximum panel thickness.

*Depicts single panel design.

- For use in mounting panels up to .25" thick.
- Converts raw-edged holes to smooth, neat, insulated holes.
- Flexible shutters to absorb vibration on the inside diameter.
- Locking fingers snap into holes with fingertip pressure.
- Withstands a push back force of 35 pounds.
- Insulates and mechanically protects electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Available in multiple sizes for use in .500" (12,7 mm) to 1.500" (38,1 mm) diameter holes.

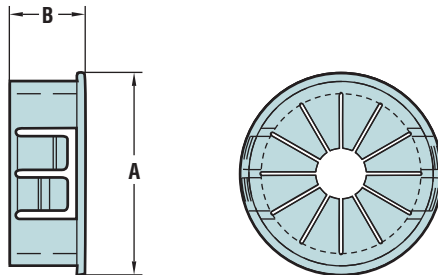

Material

6/6 Nylon

Certifications

Recognized under the Component Program of Underwriters' Laboratories, File E15331

SP Certified by Canadian Standards Association, File LR8919

Flammability Rating

94V-2

Material Temperature Index

257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

*Quick
Specs*





Heyco® Open/Closed Universal Bushings

- Split design allows side entry and encirclement of preassembled harnesses, power cords, capillary tubes or other assemblies that have segments larger than the bushing's ID.
- Parts can be assembled into holes that already contain cables or tubing.
- Only fingertip pressure required to snap-lock the bushing into its mounting hole.
- Flexible shutters adjust to accommodate and support any shape from .125" to a maximum diameter of 1.062".
- Absorbs vibration, cushions and insulates cables, tubing, hoses or shafts with limited internal clearance.
- Available in multiple sizes for use in .500" (12,7 mm) to 1.500" (38,1 mm) diameter holes.

PANEL DIMENSIONS				PART NO.	DESCRIPTION	PART DIMENSIONS					
Maximum Thickness in.		Mounting Hole Diameter in.				Max. Inside Diameter		A Head Diameter		B Overall Height	
.125	3,2	.500	12,7	2055SP	OCUB-500	.312	7,6	.562	14,3	.385	9,8
.125	3,2	.625	15,9	2077SP	OCUB-625	.437	11,1	.718	18,2	.406	10,3
.125	3,2	.750	19,0	2089SP	OCUB-750	.500	12,7	.812	20,6	.406	10,3
.125	3,2	.875	22,2	2119SP	OCUB-875	.562	14,3	.921	23,4	.406	10,3
.125	3,2	1.000	25,4	2137SP	OCUB-1000	.750	19,0	1.062	27,0	.406	10,3
.125	3,2	1.093	27,8	2157SP	OCUB-1093	.812	20,6	1.187	30,2	.406	10,3
.125	3,2	1.250	31,8	2196SP	OCUB-1250	.937	23,8	1.468	37,3	.406	10,3
.125	3,2	1.375	34,9	2184SP	OCUB-1375	1.000	25,4	1.468	37,3	.406	10,3
.125	3,2	1.500	38,1	2213SP	OCUB-1500	1.062	26,9	1.578	40,1	.421	10,7

Standard color black. Consult Heyco for white and other colors.

Locking fingers in fractional increments up to the maximum panel thickness.



Quick
Specs

Material
Certifications

6/6 Nylon



Recognized under the Component Program of Underwriters' Laboratories, File E15331



Certified by the Canadian Standards Association, File LR8919

Flammability Rating

94V-2

Material Temperature Index

257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)




Heyco® Open/Closed Bushings

Panel Dimensions				Part No.	Description	Part Dimensions					
Maximum Thickness		Mounting Hole Diameter				A Inside Diameter		B Head Diameter		C Overall Height	
in.	mm.	in.	mm.			Black	in.	mm.	in.	mm.	in.
.125	3,2	.375	9,5	2865	OCB-375	.265	6,7	.421	10,7	.390	9,9
.125	3,2	.437	11,1	2867	OCB-437	.330	8,4	.500	12,7	.406	10,3
.125	3,2	.500	12,7	2871	OCB-500	.312	7,9	.562	14,3	.406	10,3
.125	3,2	.562	14,3	2869	OCB-562	.390	9,9	.640	16,3	.406	10,3
.125	3,2	.625	15,9	2872	OCB-625	.453	11,5	.687	17,5	.406	10,3
.125	3,2	.750	19,0	2873	OCB-750	.546	13,9	.796	20,2	.406	10,3
.125	3,2	.875	22,2	2874	OCB-875	.671	17,7	.921	23,4	.406	10,3
.125	3,2	1.000	25,4	2878	OCB-1000	.812	20,6	1.047	26,6	.406	10,3
.125	3,2	1.093	27,8	2879	OCB-1093	.875	22,2	1.156	29,4	.406	10,3
.125	3,2	1.250	31,8	2881	OCB-1250	1.046	26,6	1.343	34,1	.406	10,3
.125	3,2	1.375	34,9	2882	OCB-1375	1.171	29,7	1.468	37,3	.406	10,3
.125	3,2	1.500	38,1	2883	OCB-1500	1.250	31,7	1.578	40,1	.421	10,7

Standard color black. Consult Heyco for white and other colors.

Locking fingers in fractional increments up to the maximum panel thickness.

- Multiple sizes for use in mounting holes from .375" (9,5 mm) to 1.500" (38,1 mm).
- Split design allows side entry and encirclement of preassembled harnesses, capillary tubes or other assemblies that have segments larger than the bushing's ID.
- May also be assembled into holes that already contain cable, wire or other filaments.
- Fingertip pressure snap-locks the bushing into its mounting hole.

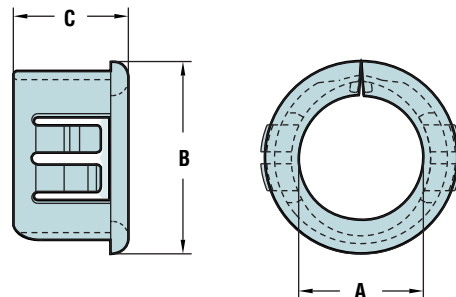
Material

6/6 Nylon

Certifications


Recognized under the Component Program of Underwriters' Laboratories
File E15331



Certified by the Canadian Standards Association File LR8919

Flammability Rating

94V-2

Material Temperature Index

257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

*Quick
Specs*