




Microminiature COAXICON Contacts

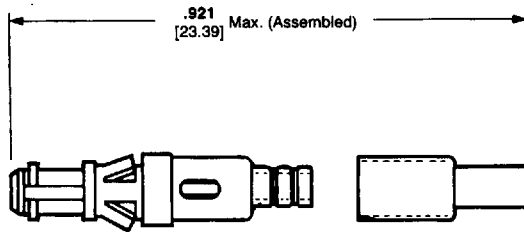

Cable Pin

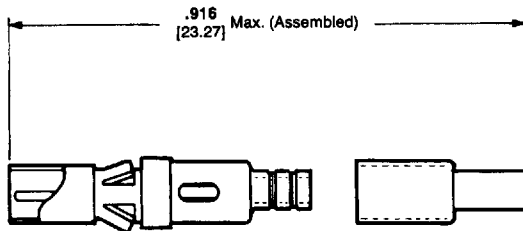


Cable Socket

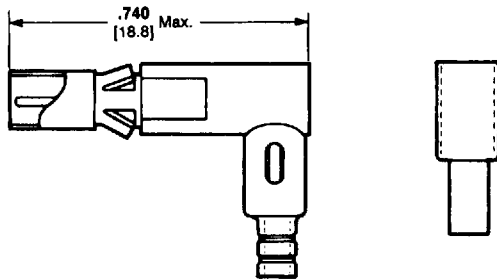


Right Angle Cable Socket

Cable Size	Contact Style	Part No.	Application Tool Part No.
RG 178/U Double Braid	Cable Pin	227604-1	220215-1
RG 196/U Tensolite	Cable Socket	227605-1	
30850/81T-1	Right Angle	227606-1	
Malco 250-390-8	Cable Socket	227606-1	


Extraction Tool Part No. 220216-1

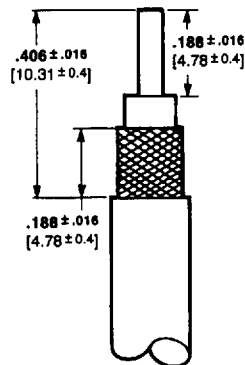

Recommended Strip Length

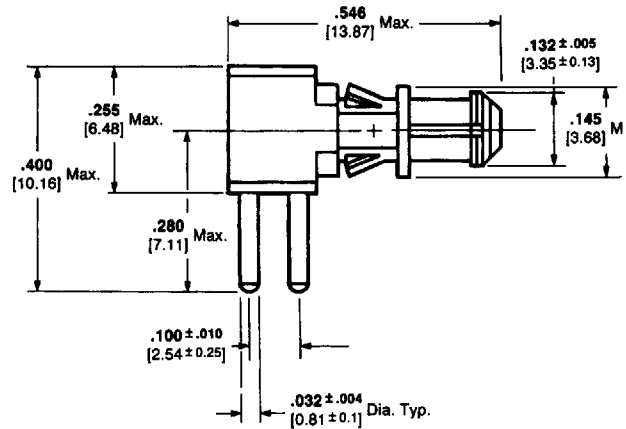

Right Angle Pin
for Pc Board Application
Part No. 227602-1
Plated .000030 [0.00076] gold

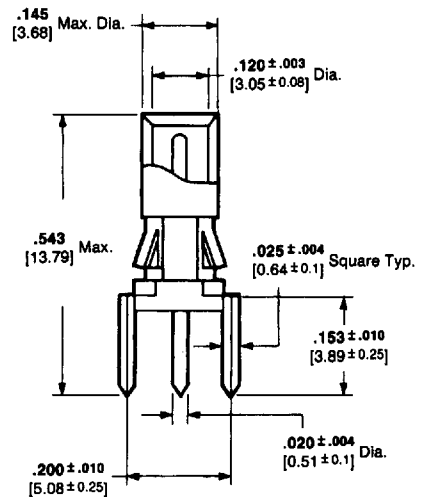

Vertical Socket
for Pc Board Application
Part No. 227603-1

Notes:

- Center contacts are plated with .000030 [0.00076] gold.
- For .125 [3.18] maximum thick pc boards.

Electrical Characteristics:

Nominal Impedance—50 ohms

Frequency Range—0-2 GHz

Maximum Operating Voltage (Sea Level)—150 VAC RMS

Mechanical Characteristics:

Operating Temperature Range—55°C to +125°C

Cable Retention—15 lb. [66.7N] min. (RG 178 type double braid)

Contact Materials:

Stainless Steel—QQ-S-766

Gold Plate—MIL-G-45204

Nickel Plate—QQ-N-290

Beryllium Copper—QQ-C-530

TEFLON TFE—MIL-P-19468A

Brass—QQ-B-626

Ferrule Material:

Brass—MIL-C-50, tin plate per MIL-T-10727

TEFLON—Trademark of E.I. duPont, Inc.