


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

M39012/01-0015

REVISIONS

ISSUE	CHANGES
0	ER 34925 TK 05/10/94

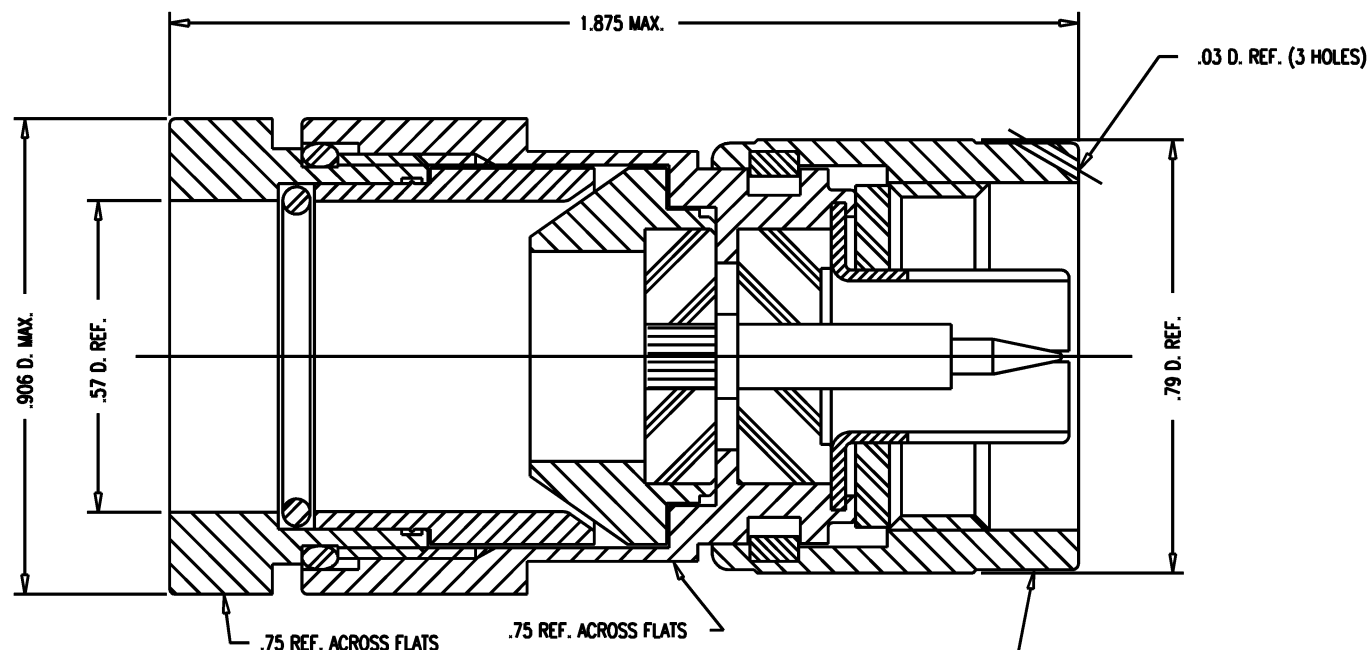

NOTES:

1. FOR USE WITH M17/78-RG217 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-539.
3. INTERFACE PER MIL-STD-348, FIG. 304-1.
4. MATERIAL:
INSULATORS: TEFLON, ASTM-D-1457
GASKETS: SIL. RUB., ZZ-R-765
C-RING: PHOS. BRONZE, QQ-B-750
ALL OTHER PARTS: BRASS, ASTM-B16
5. FINISHES:
CENTER CONTACT: HARD GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS: SILVER PLATE PER QQ-S-365
6. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
VOLTAGE RATING: 1000 VRMS
FREQUENCY RANGE: DC TO 11 GHz

STAMP: 91836 M39012/01-0015

KINGS 1205-37-5 XX XX

DATE CODE

1205-37-5

JCA0916

SCALE 4:1

APPROX SURFACE AREA

WAS: E-17726

USED ON

REF:

PLUG, N

DRAWN	TK	08/27/93
DESIGN	VLS	08/27/93
APPR.	VLS	08/27/93

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

M39012/01-0015

GSD