


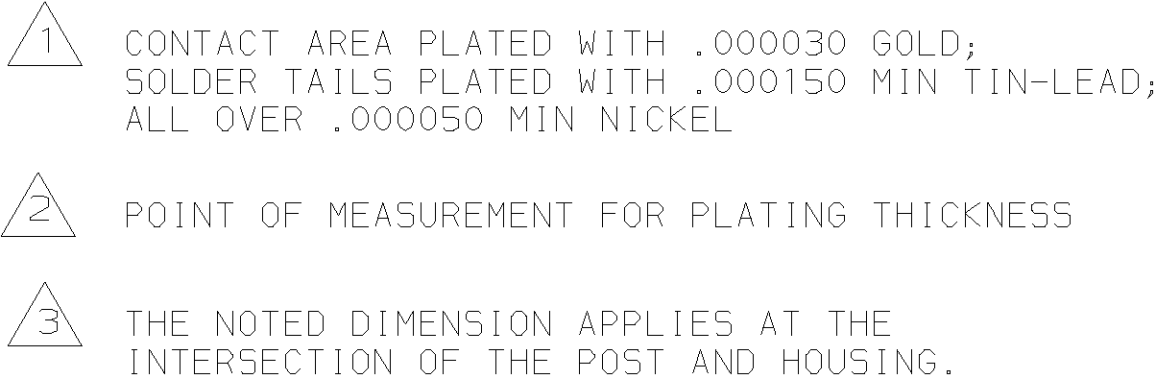

	2.515	49	100	1-104118-7
	2.015	39	80	1-104118-6
OBSOLETE	1.815	35	72	1-104118-5
	1.515	29	60	1-104118-4
OBSOLETE	1.115	21	44	1-104118-3
	1.015	19	40	1-104118-2
OBSOLETE	.865	16	34	1-104118-1
	.765	14	30	1-104118-0
OBSOLETE	.665	12	26	104118-9
OBSOLETE	.615	11	24	104118-8
	.515	9	20	104118-7
OBSOLETE	.415	7	16	104118-6
OBSOLETE	.365	6	14	104118-5
OBSOLETE	.315	5	12	104118-4
	.265	4	10	104118-3
OBSOLETE	.215	3	8	104118-2
	1.265	24	50	104118-1
	B	A	NO OF POSN	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC $\pm$.005 3 PLC DEC $\pm$.005 ANGLES $\pm$ -		DR 10-3-88 D CLOUSER		 AMP INCORPORATED Harrisburg, Pa. 17105	
MATERIAL HOUSING: THERMOPLASTIC COLOR-BLACK CONTACT: COPPER ALLOY		CHK 10-3-88 T ZOLA	NAME HEADER ASSEMBLY, RIGHT ANGLE, UNSHROUDED, DOUBLE ROW, AMPMODU® System 50		
		APPD 10-3-88 T ZOLA			
		APPD 10-3-88 C SNYDER			
FINISH  		PRODUCT SPEC 108-1093	SIZE FSCM NO D 00779 104118 SCALE 5:1 SHEET 1 OF 1		
		APPLICATION SPEC 114-25031			
		WEIGHT _			