

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.10kg min.
Durability : 25 Cycles

Electrical


Voltage Rating: 50V
Current Rating: 0.5A
Contact Resistance: 55mW max.
Dielectric Withstanding Voltage: 200V AC/1 min.
Insulation Resistance: 100MW

Physical



Housing: Thermoplastic, UL 94V-0 rated in Ivory Color
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Metal Spring: Copper alloy
Operating Temperature: -40 to +85

MINI PCI Socket

AS Series
5.2 mm Height SMT Type
0.80mm [.031"] Pitch
124 Pos.

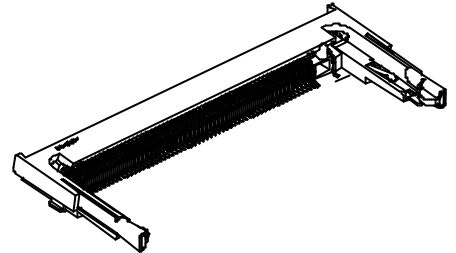

DRAWING

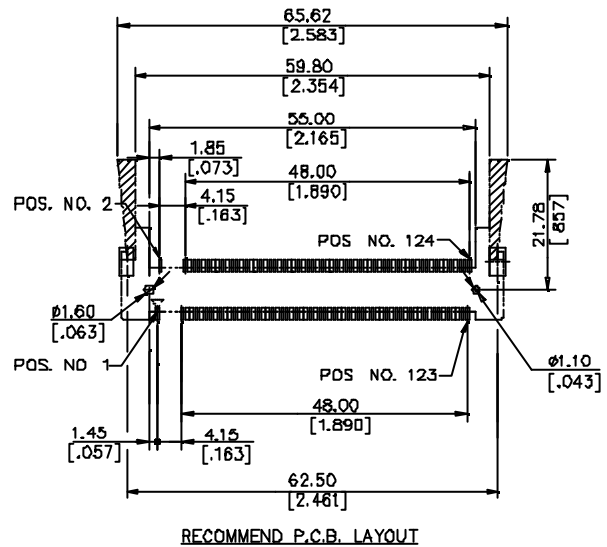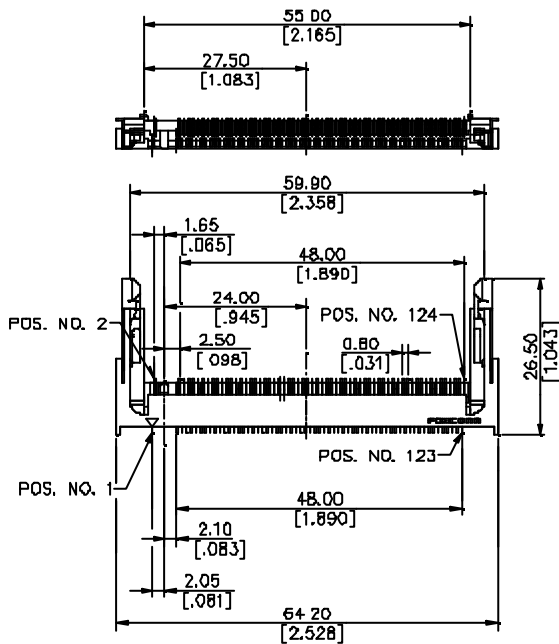

ORDERING INFORMATION

PRODUCT NO.: A S 0 B1 2 * - S 52 N - * F

Memory Module Socket — A
 Horizontal Type — S
 Single Row — 0
 No. of Pos. — B1
 B1=124 Pos.
 SMT Type — 2
 Contact Area Plating — *
 6=10u" Gold
 1=Gold Flash
 Short Body — S
 5.2mm Height — 52
 General Type — N
 Soft Tray — 4
 Tape Reel — 7
 Lead Free — F