


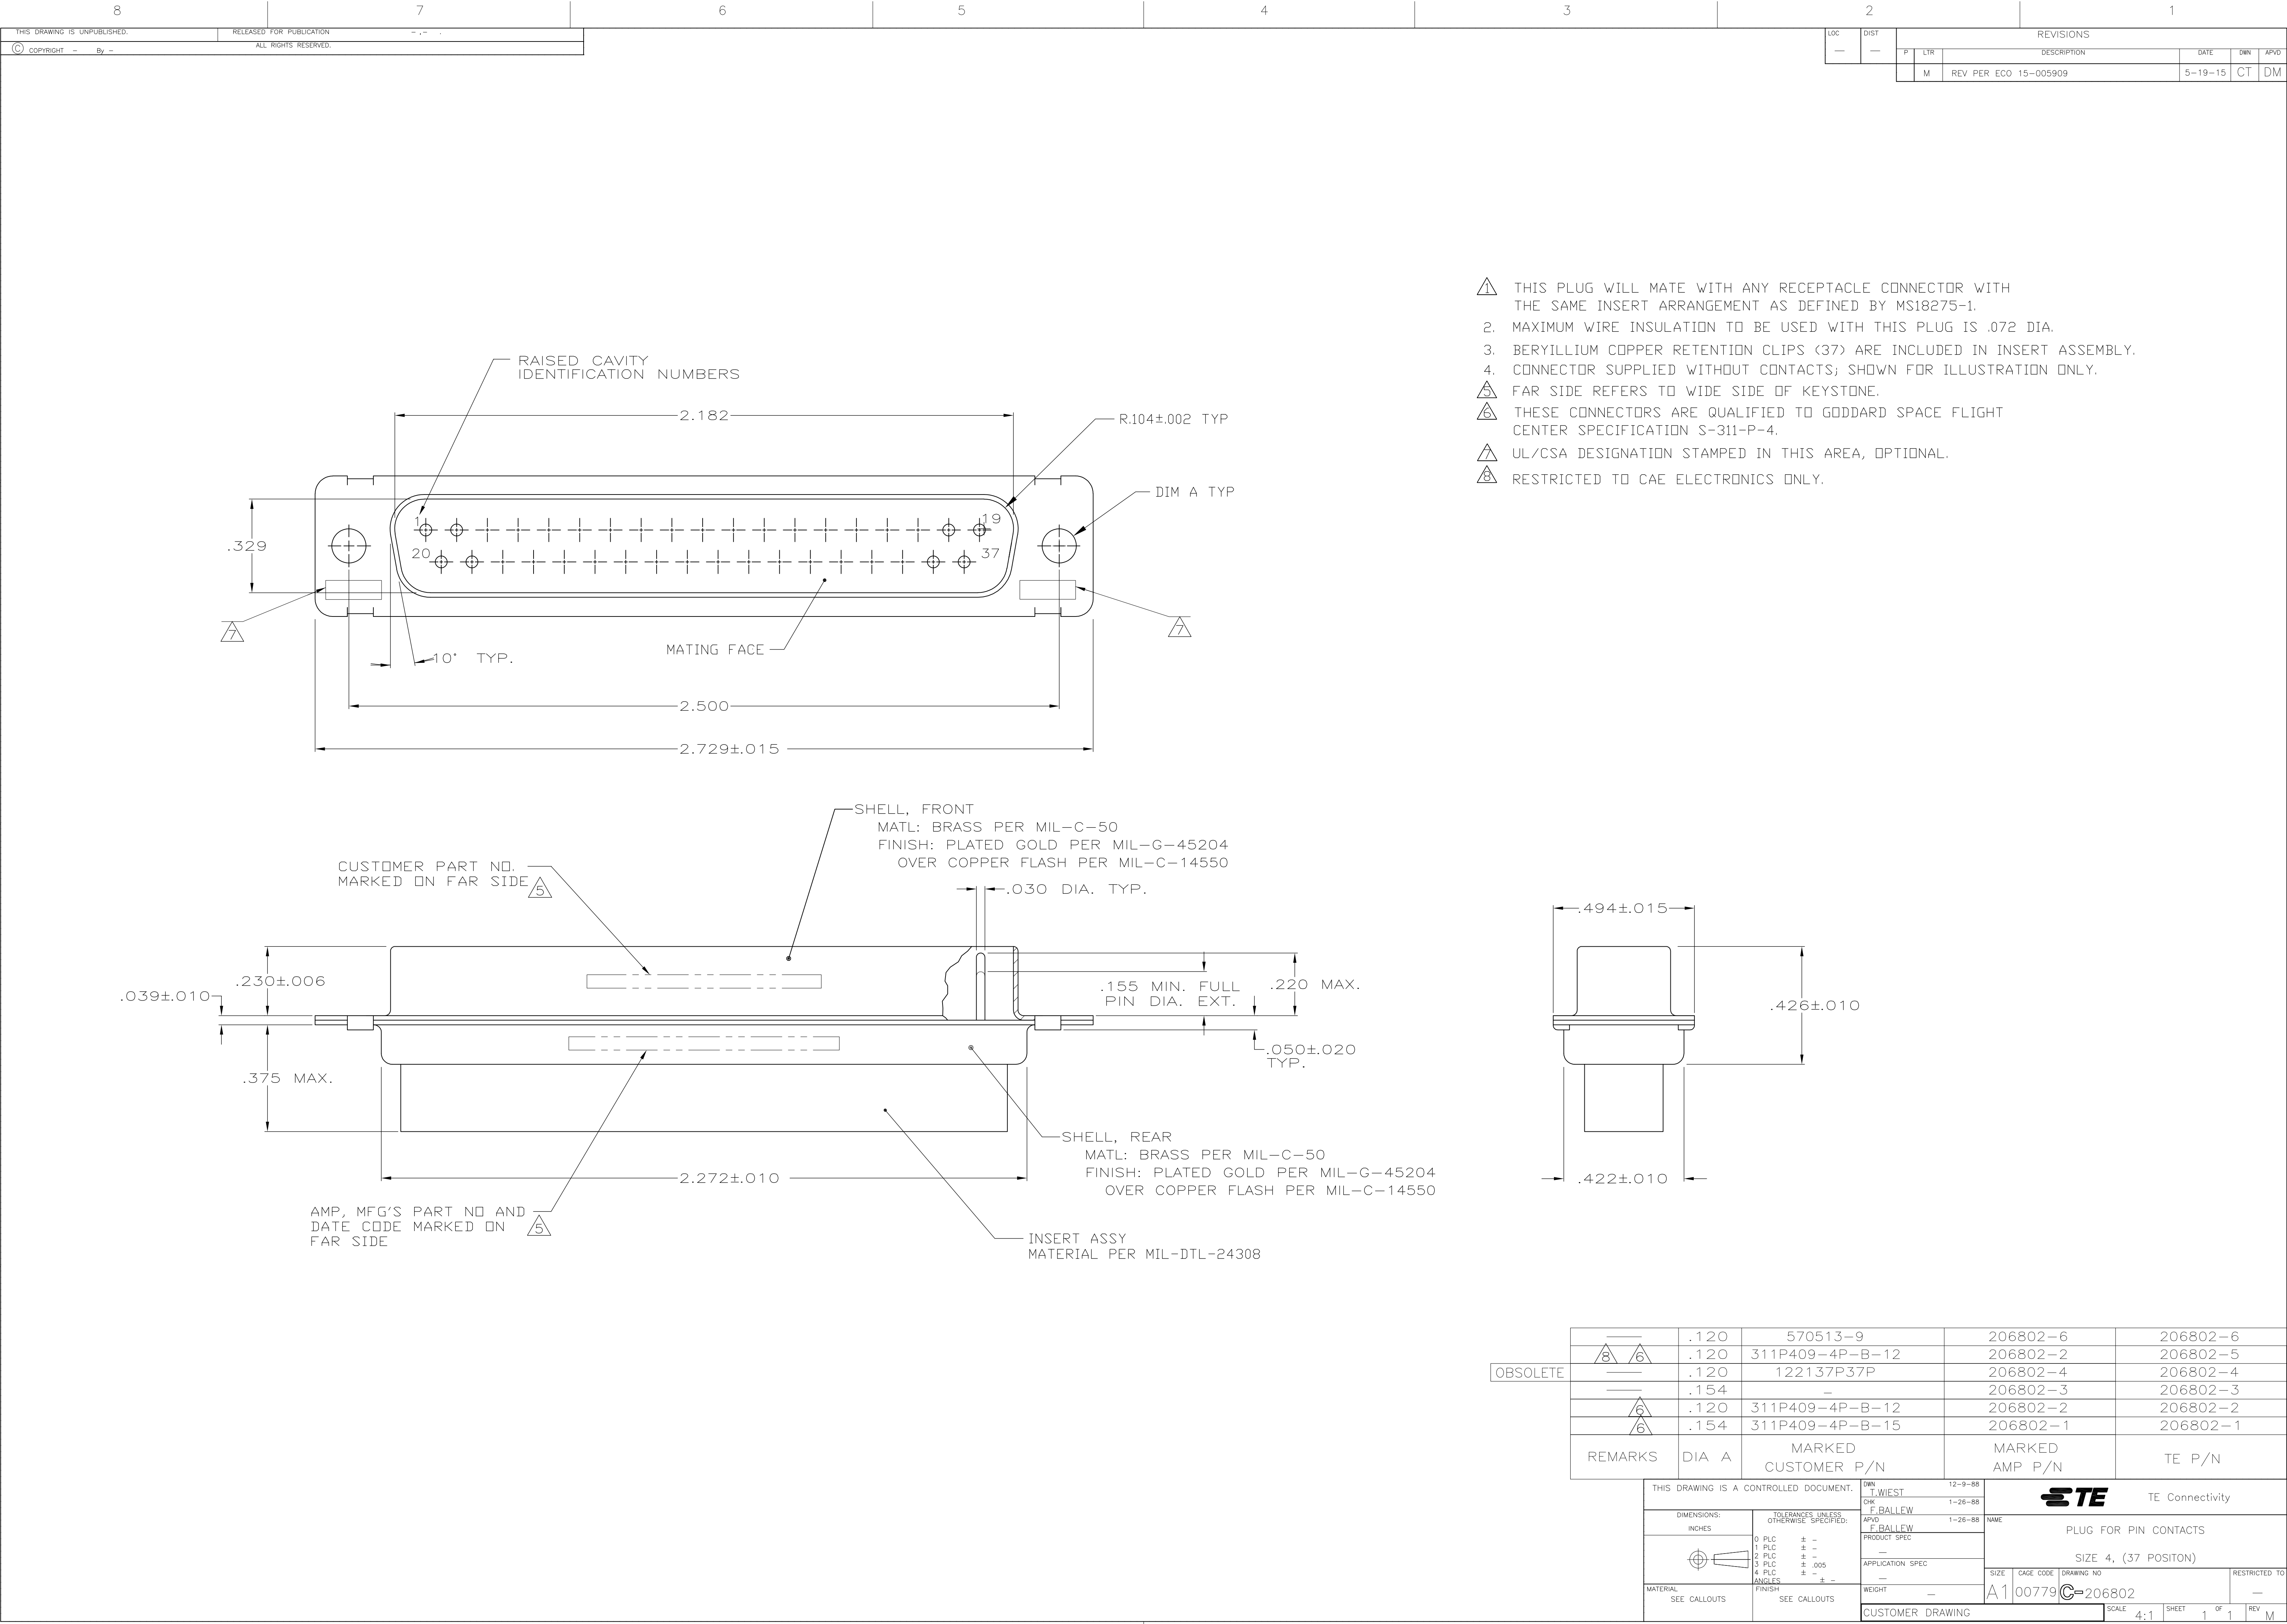

- THIS PLUG WILL MATE WITH ANY RECEPTACLE CONNECTOR WITH THE SAME INSERT ARRANGEMENT AS DEFINED BY MS18275-1.
2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS PLUG IS .072 DIA.
3. BERYLLIUM COPPER RETENTION CLIPS (37) ARE INCLUDED IN INSERT ASSEMBLY.
4. CONNECTOR SUPPLIED WITHOUT CONTACTS; SHOWN FOR ILLUSTRATION ONLY.
- FAR SIDE REFERS TO WIDE SIDE OF KEYSTONE.
- THESE CONNECTORS ARE QUALIFIED TO GODDARD SPACE FLIGHT CENTER SPECIFICATION S-311-P-4.
- UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL.
- RESTRICTED TO CAE ELECTRONICS ONLY.

OBSOLETE		.120	570513-9	206802-6	206802-6
		.120	311P409-4P-B-12	206802-2	206802-5
		.120	122137P37P	206802-4	206802-4
		.154	-	206802-3	206802-3
		.120	311P409-4P-B-12	206802-2	206802-2
		.154	311P409-4P-B-15	206802-1	206802-1
REMARKS	DIA A	MARKED CUSTOMER P/N		MARKED AMP P/N	TE P/N
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. WIEST 12-9-88	TE Connectivity		
DIMENSIONS: INCHES		CHK: F. BALLEW 1-26-88			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: F. BALLEW 1-26-88	NAME		
0 PLC ± -		PRODUCT SPEC			
1 PLC ± -		APPLICATION SPEC	SIZE 4, (37 POSITON)		
2 PLC ± -		WEIGHT -			
3 PLC ± .005		SCALE 4:1	SHEET 1 OF 1		
4 PLC ± -		REV M			
ANGLES ± ±		CUSTOMER DRAWING			
MATERIAL SEE CALLOUTS		SEE CALLOUTS			
		00779			
		206802			