
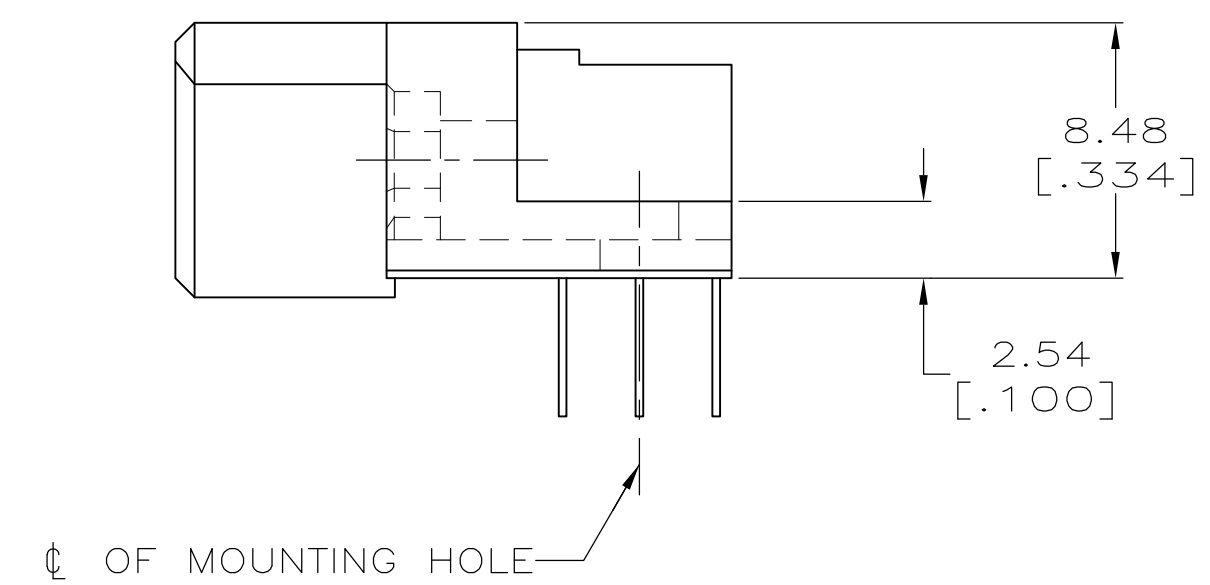
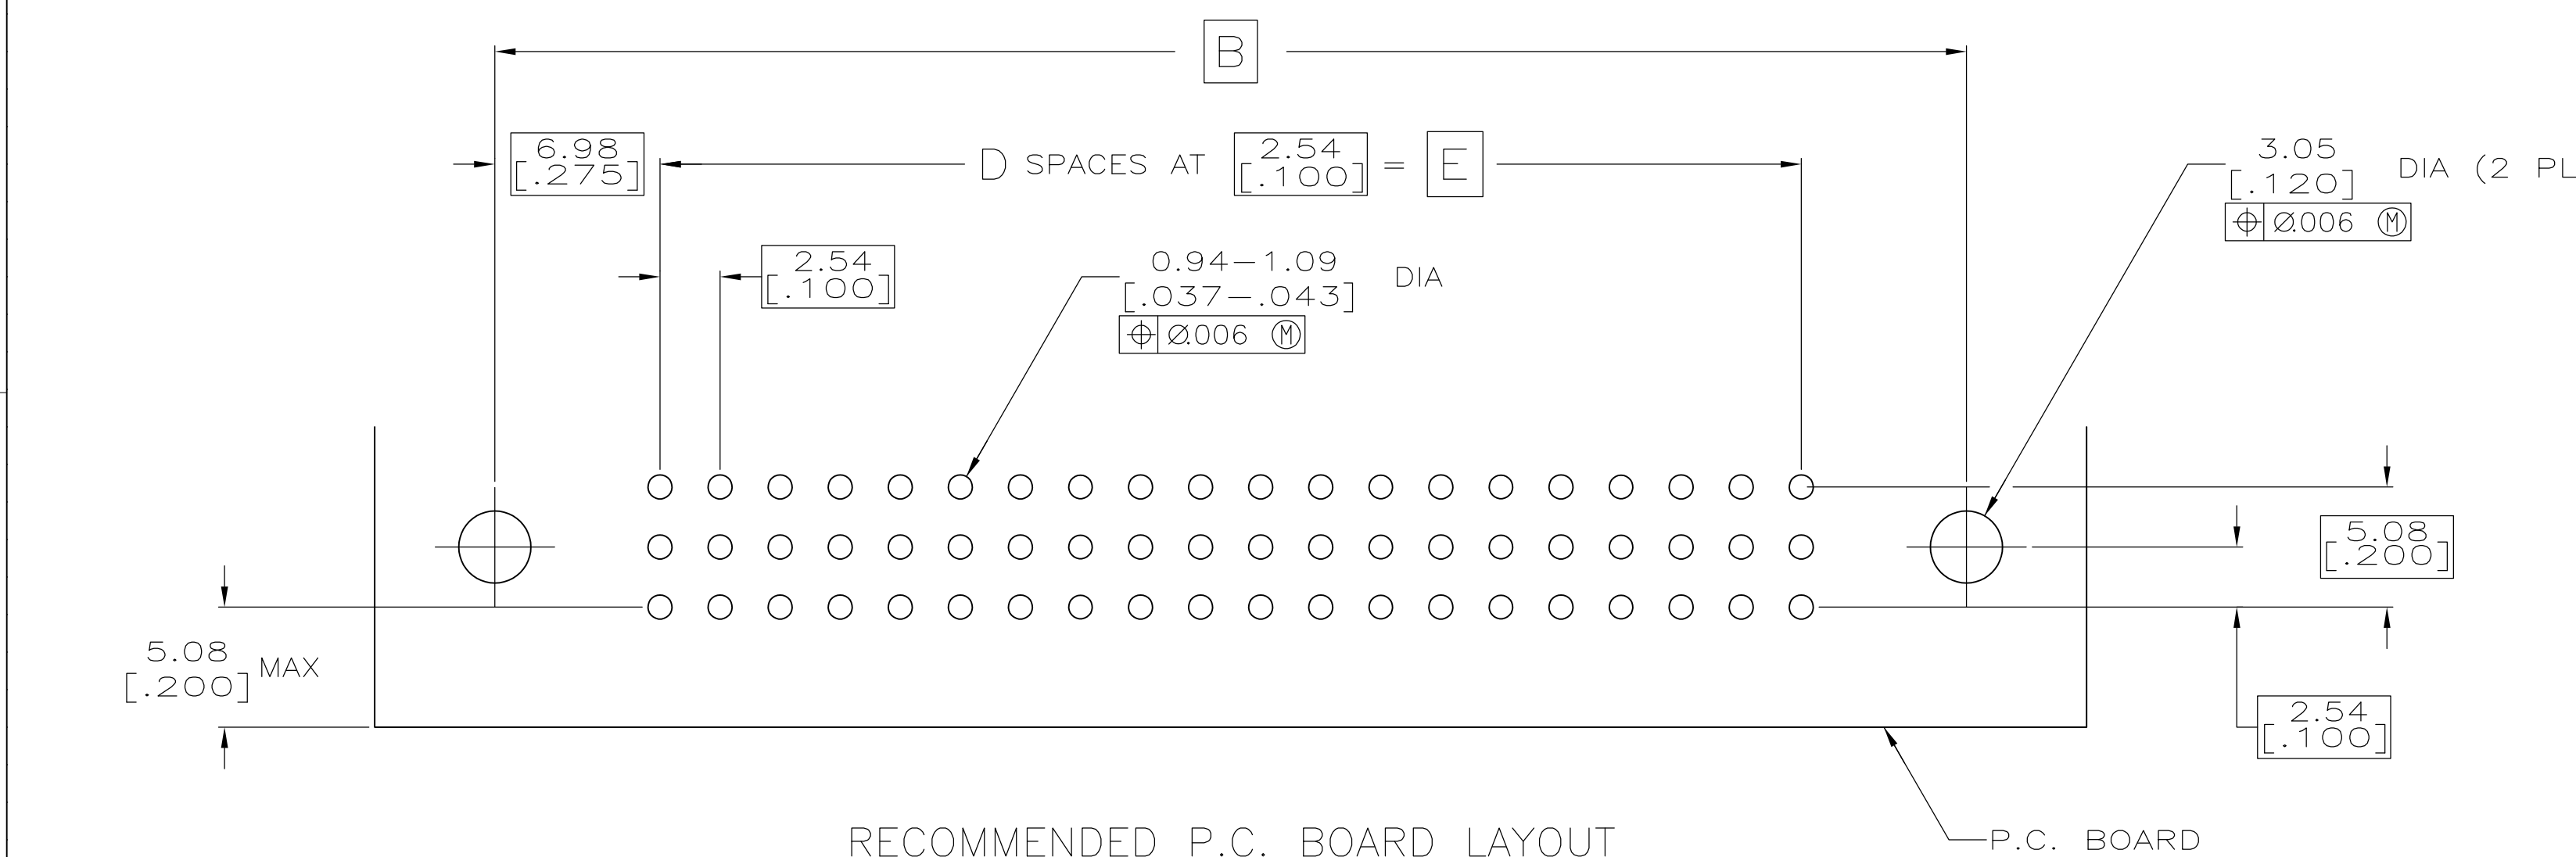






SECTION T-1

RECOMMENDED P.C. BOARD LAYOUT

P.C. BOARD

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG R.K. SEIFRED 06/13/90 CHK G.SKIPPER 01/24/92 NAME		 TE Connectivity	
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		HDI, 3 ROW, RECEPTACLE ASSEMBLY, 4.57 [180] LONG SOLDER TAILS, .00076 [0.00030] GOLD PLATE	
		0 PLC ± .- 1 PLC ± .- 2 PCL ± .- 3 PCL ± .- 4 PCL ± .13 [005] FINISH ANGLES ± .-		PRODUCT SPEC APPLICATION SPEC	
MATERIAL 		WEIGHT 		SIZE A1	
				CASE CODE 00779	
				DRAWING NO C=532431	
				RESTRICTED TO 	
				SCALE 4:1	
				SHEET 1 of 2	
				REV V	
				CUSTOMER DRAWING	

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
(C) COPYRIGHT - By - ALL RIGHTS RESERVED.		

LOC	DIST	REVISIONS					
AD	25	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

- ① HOUSING MATERIAL: THERMOPLASTIC, COLOR-NATURAL.
- ② CONTACT MATERIAL: COPPER ALLOY.
- ③ CONTACT FINISH: .00127-.00254 [.000050-.000100] NICKEL UNDERPLATE ALL OVER; .00076 [.000030] GOLD PLATE IN CONTACT AREA, TIN-LEAD PLATED SOLDER TAILS.
- ④ SOLDER TAILS MUST FIT HOLE PATTERN AS SHOWN ON THE RECOMMENDED P.C. BOARD LAYOUT.
5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- ⑥ HOUSINGS WITH CENTER MOUNTING IS RECOMMENDED FOR ASSEMBLIES HAVING 75 CONTACTS PER ROW OR MORE.
- ⑦ PART NUMBER IS OBSOLETE.
- ⑧ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

[illegible]