



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
PCK

5					6					7					8				
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△					△					△				
△					△					△					△				
△					△					△					△				

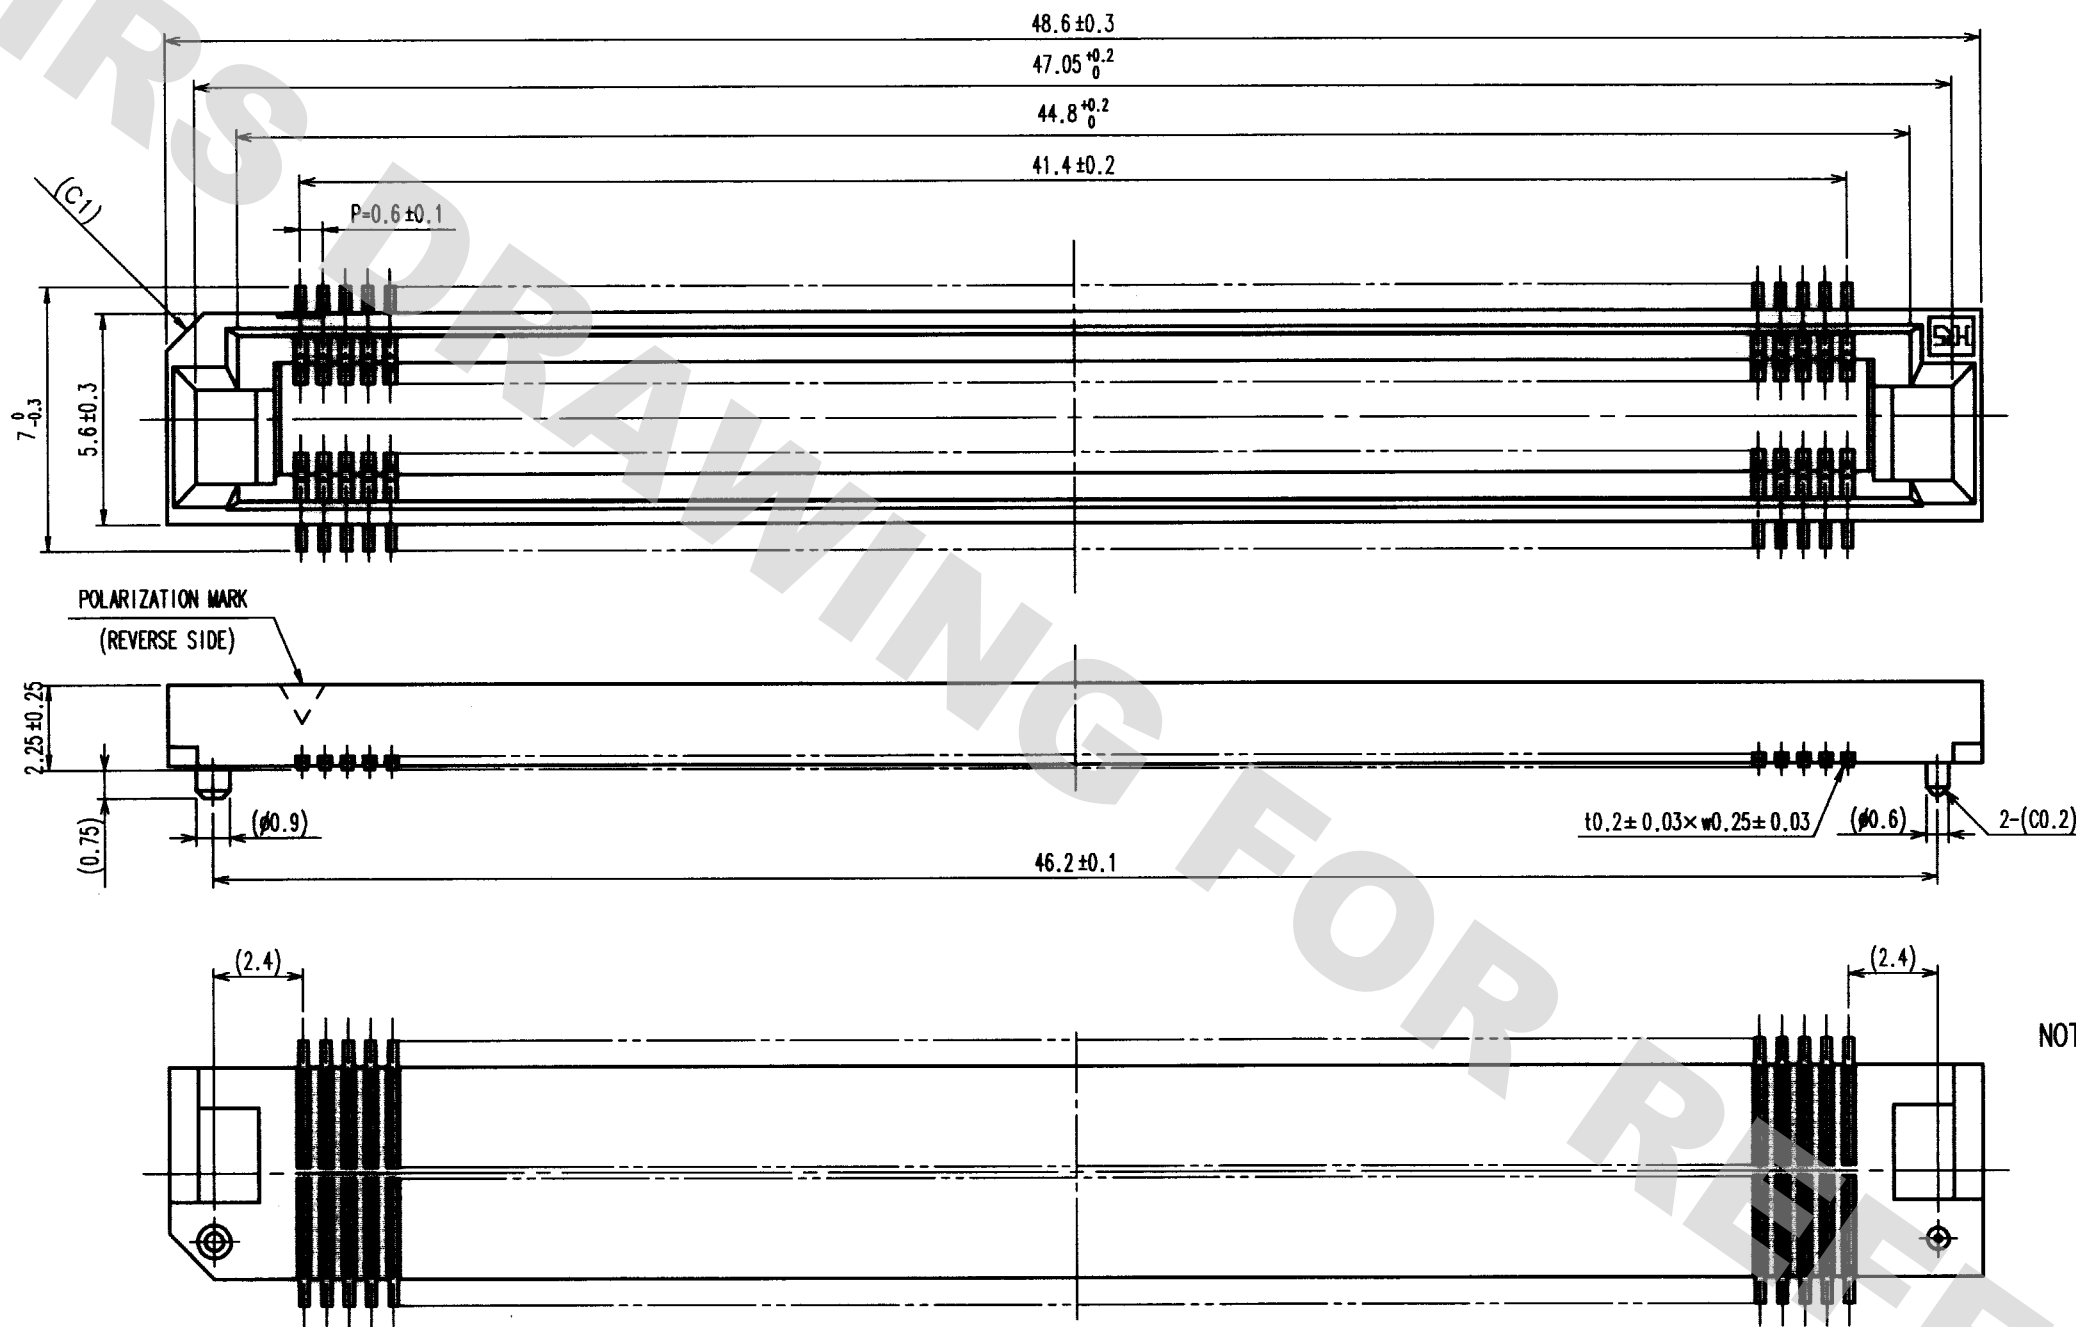

- NOTE
- 1 LEAD CO-PLANARITY SHALL BE 0.1 MAX.
 - 2 EMBOSS CARRIER TAPE PACKAGING SHALL BE APPLIED FOR THIS PRODUCT. SEE SHEET 2/2 FOR DETAILS.
 - 3 THIS PRODUCT HAS TAPE FOR VACUUM PICKUP. SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC
 - 4 FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED DEPENDS ON CIRCUMSTANCES.

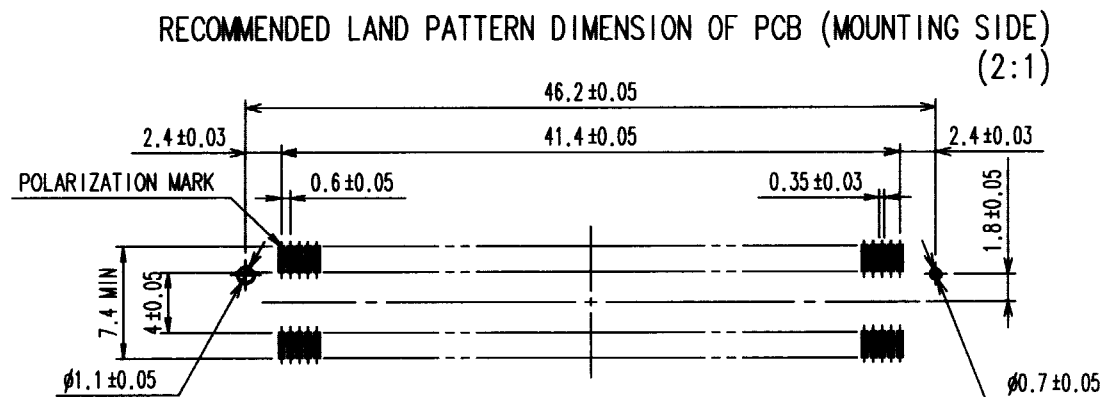

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD(0.1μm) OVER NICKEL
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	THE OTHER AREA: GOLD(FLASH) OVER NICKEL
CODE NO. (OLD)			DRAWN	DESIGNED	CHECKED
			M. Nagata	M. Nagata	H. Okawa
			01-04-06	01-04-06	01-04-06
					Y. Yoshimura
					01-04-06
DRAWING NO.			PART NO.		
EDC3-150678-02			FX8-140S-SV(23)		
SCALE			CODE NO.		
5 : 1			CL578-0207-1-23		
UNITS					
mm					
HRS					
HIROSE ELECTRIC CO., LTD					

DRAWING FOR REFERENCE. This is subject to change without notice.
08/11/2012

TO
PCK

