

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HM	00		J	REV; ECO-15-007444	14MAY2015	GG	JG

- 1

DIMENSIONS ARE MAXIMUM UNLESS OTHERWISE SPECIFIED.
- 2


MATERIAL: HOUSING – POLYCARBONATE, CLEAR
TERMINAL – .36 [.014] THICK PHOSPHOR BRONZE PLATED WITH .178 μ m[.000007] THICK GOLD IN LOCALIZED PLATE AREA, OVER .762 μ m[.000030] THICK PALLADIUM NICKEL IN LOCALIZED PLATE AREA OVER 2.54 μ m[.000100] THICK NICKEL ON ENTIRE CONTACT.
SHIELD – COPPER ALLOY WITH 1.27 μ m[.000050] MINIMUM SEMI-BRIGHT (SATIN) NICKEL.
- 3

PLUG WILL ACCEPT 24 TO 28 AWG STRANDED WIRE, 0.74–0.99 [.029–.039] DIAMETER, WITH A 5.08 [.200] DIAMETER MAXIMUM JACKET.
- 4


TERMINATED DIMENSION 6.15 [.242] MAXIMUM.
- 5

500 ASSEMBLIES PER PACKAGE.
- 6

100 ASSEMBLIES PER PACKAGE.

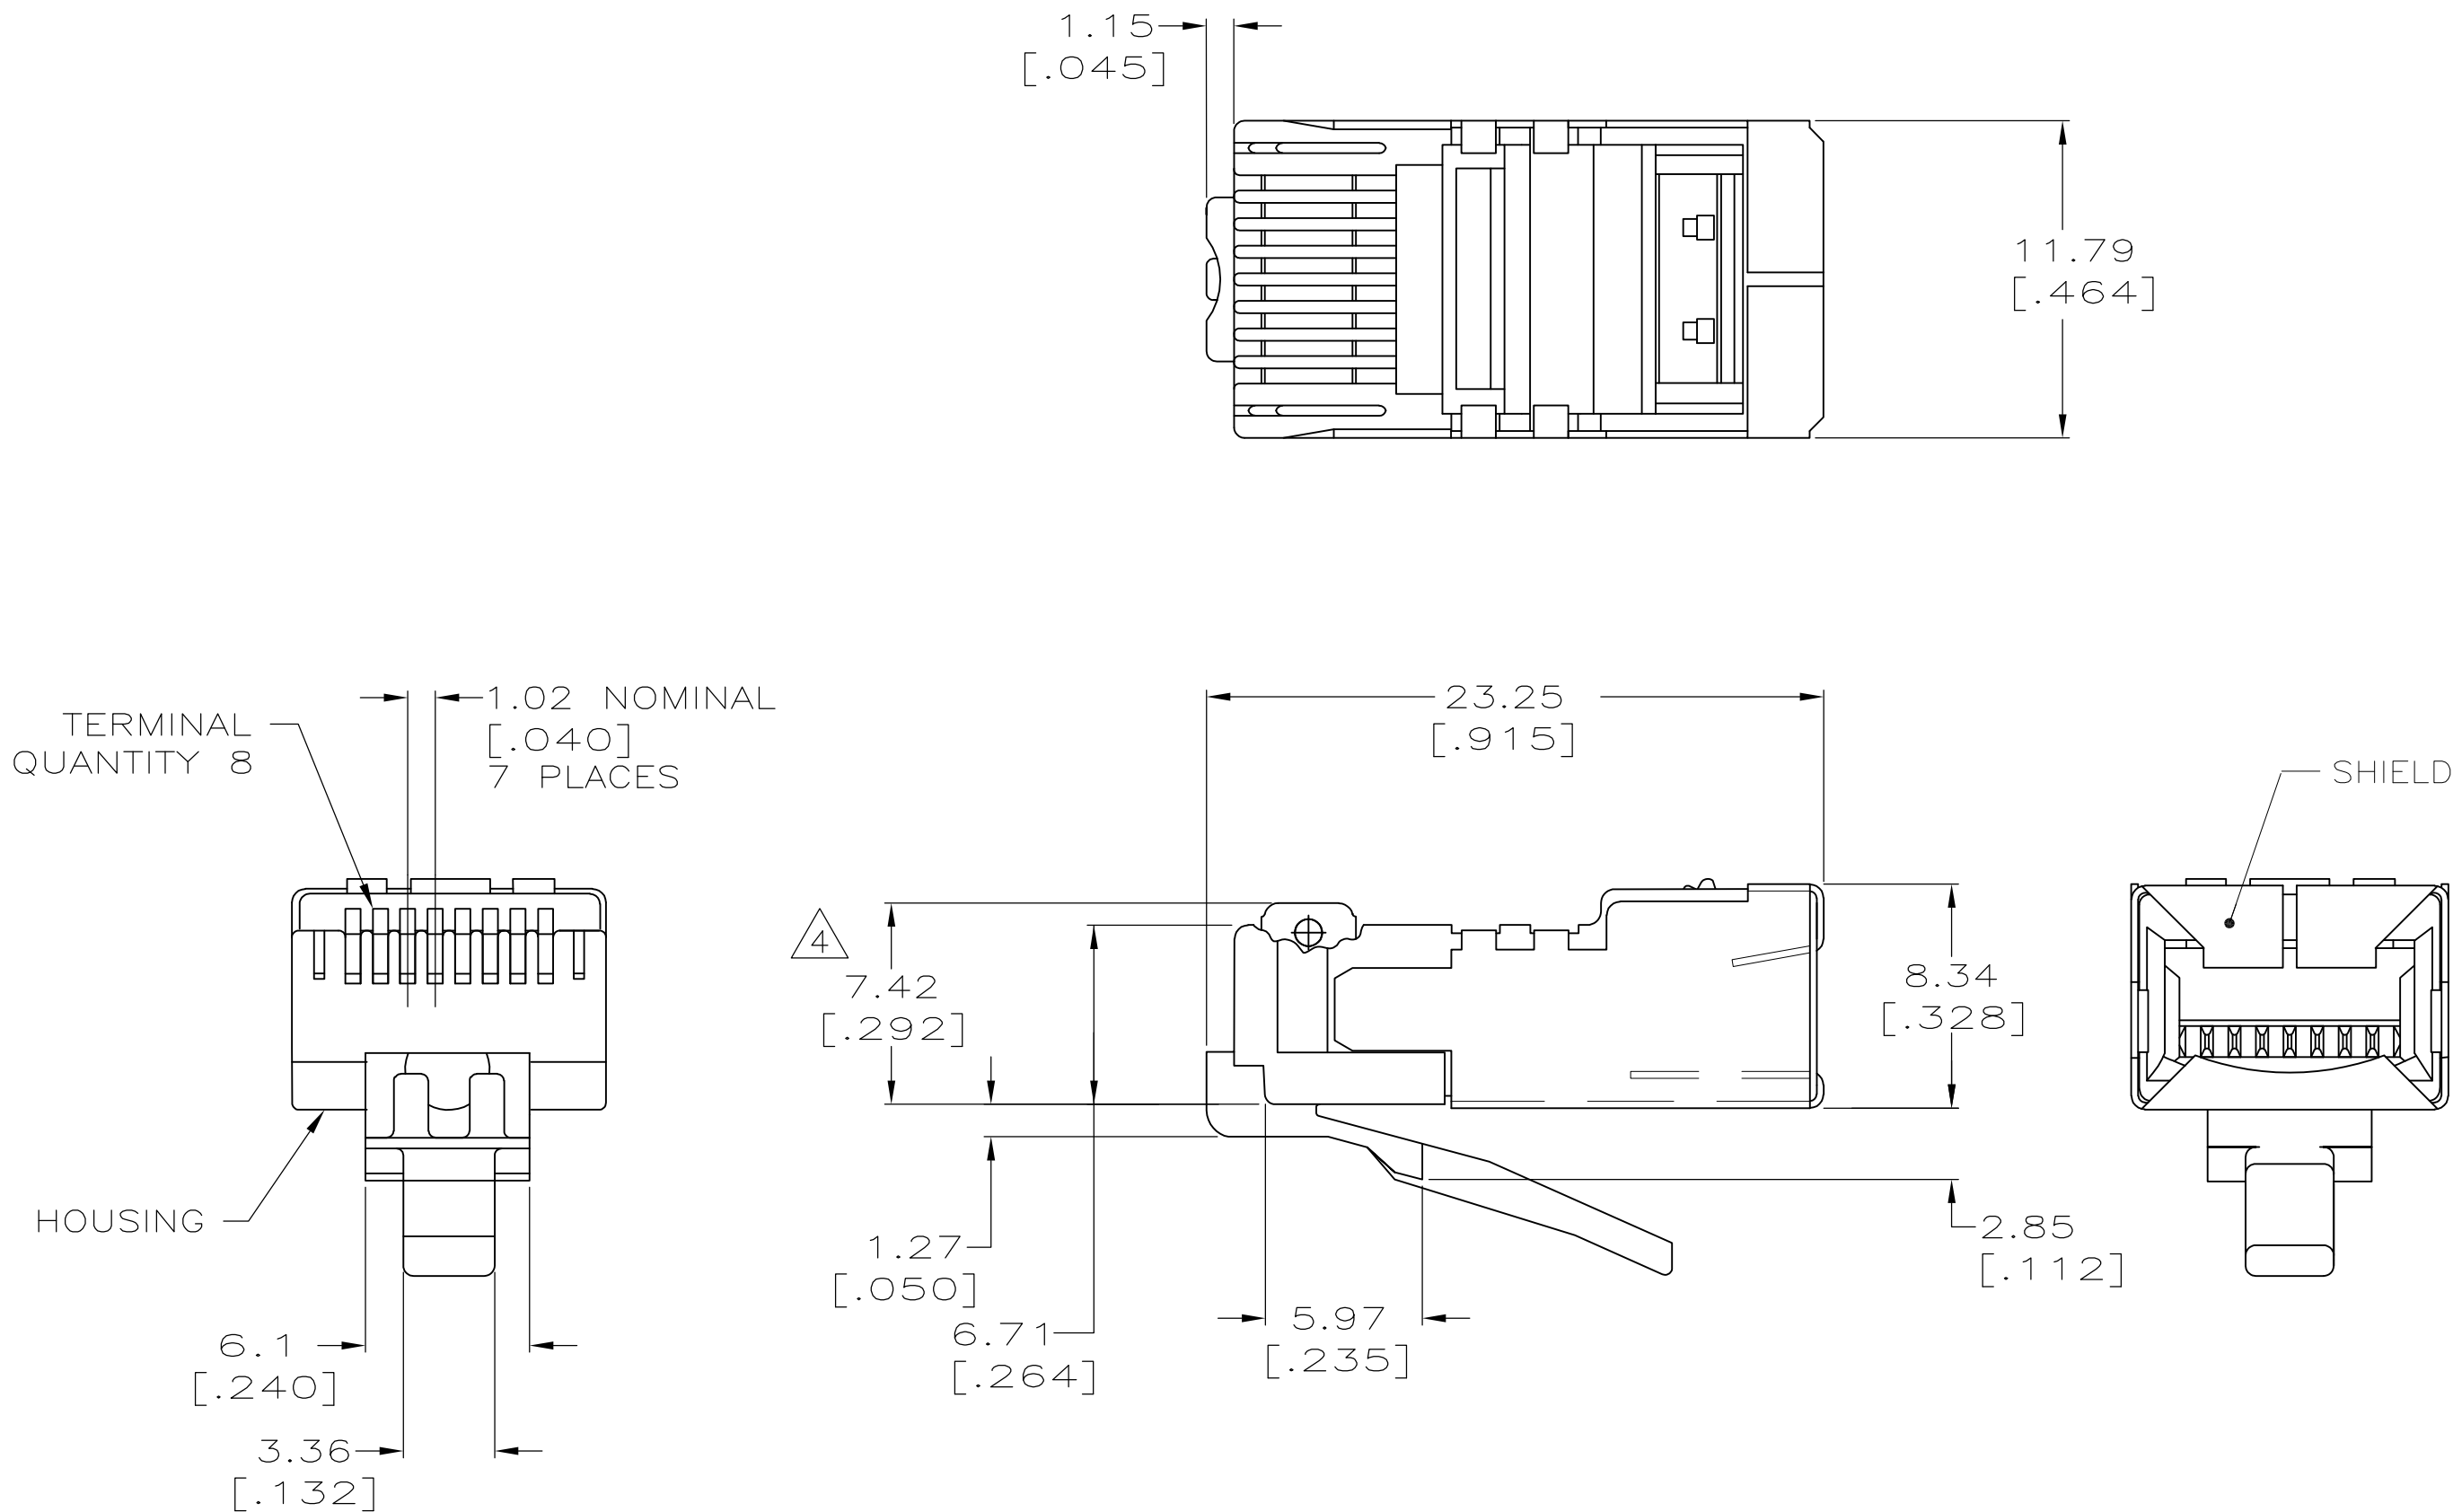

6	5-569532-3
5	5-569532-2
PACKAGED	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. HALL 25OCT2006	 TE Connectivity				
		CHK C. DOOLEY 30OCT2006					
DIMENSIONS: mm [INCHES]		APVD C. DOOLEY 30OCT2006	NAME MODULAR PLUG ASSEMBLY, 8 POSITION, SHIELDED, ROUND CABLE, STRANDED WIRE				
		PRODUCT SPEC 108-1163					
		APPLICATION SPEC 114-6016	SIZE CAGE CODE DRAWING NO RESTRICTED TO				
		WEIGHT -				A200779C=569532 -	
MATERIAL 	FINISH 	CUSTOMER DRAWING			SCALE 4:1		