



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER		WIRE SIZE AWG	DIMENSIONS in.				HOUSING COLOR
PREFIX	PK		A $\pm .03$ ($\pm .8$)	B DIA. $\pm .01$ ($\pm .3$)	C $\pm .02$ ($\pm .3$)	D DIA.	
PV18-P47	-C -M	22-18 (.5-1.0)	.97 (24,6)	.07 (1,8)	.49 (12,4)	.15 (3,8)	RED
PV14-P47	-C -M	18-14 (1.5-2.5)	.97 (24,6)	.07 (1,8)	.49 (12,4)	.17 (4,3)	BLUE
PV10-P55	-L -D	12-10 (4.0-6.0)	1.10 (27,9)	.10 (2,5)	.55 (14,0)	.25 (6,35)	YELLOW

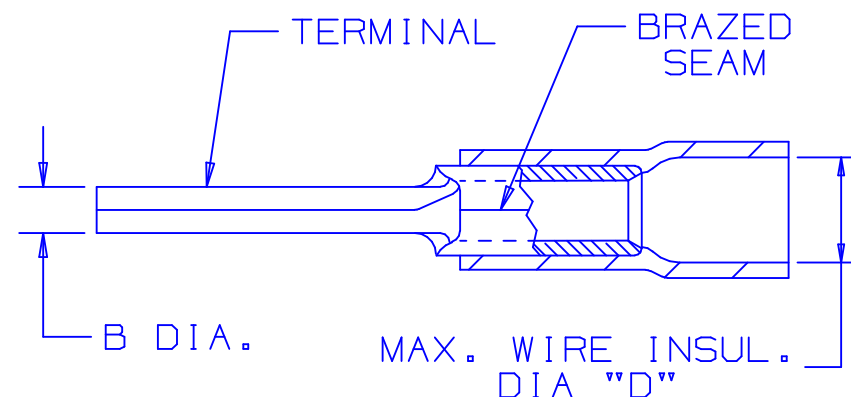

NOTES:

- RECOMMENDED FOR:
A. SOLID OR STRANDED COPPER WIRE
- MATERIAL:
A. STAMPING - COPPER, TIN PLATED
B. HOUSING - VINYL, COLOR CODED
- PACKAGE QTY: STD. PKG. -L=50, -C=100
BULK PKG. -D=500, -M=1000
- DIMENSIONS IN BRACKETS ARE IN mm or mm²
- INSTALLATION TOOLS:
A. PANDUIT APPROVED: CT-100, CT-160,
CT-250, CT-550, CT-500 (EXCEPT PV10-P55)
CT-1550, CT-1551
- WIRE STRIP LENGTH 5/16 $^{+1/32}_{-0}$ (7,9 $^{+.8}_{-0}$)

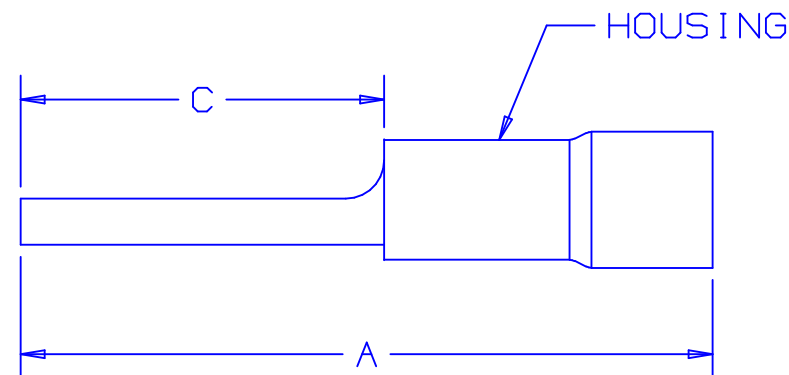

A41335_06

06	5/02	DAW		MAX. WIRE INSUL. DIA "D" WAS "D" DIA. MIN.				 TINLEY PARK, ILLINOIS
05	5/01	KMD	SKB	DIM. "A" WAS 1.01 (25,8) FOR PV18-P47	09177	TRO	JAC	
04	3/01	EJS	SKB	WIRE RANGE FOR PART PV18-P47 WAS (.5-1.5), PV14-P47 WAS (2.0-2.5)	09177	TRO	JAC	
03	2/99	WB	SKB	UPDATED NOTES AND DIMENSIONS	07530	TRO	JCJ	
REV	DATE	BY	CHK	DESCRIPTION	ECN	PM	CUST	DRAWN BY DAW CHK'D RLS SCALE NONE DRAWING NO. A41335

VINYL INSULATED PIN TERMINAL