

## FEATURES AND SPECIFICATIONS

### Features and Benefits

- Sizes 3 to 6 circuits

### Reference Information

Packaging: Bag  
UL File No.: E29179  
CSA File No.: LR19980  
Mates With: 5279-NA  
Designed In: Millimeters

### Electrical

Voltage: 250V  
Current: 7.0A  
Contact Resistance: 10mΩ max.  
Dielectric Withstanding Voltage: 1500V AC/1 min.  
Insulation Resistance: 1000 MΩ min.

### Physical


Housing: 6/6 nylon, UL 94V-2  
Contact: Brass  
Plating: Tin over Copper  
Operating Temperature: -40 to +105°C




## 5.08mm (.200") Pitch PC Board Connector

**2767-NAH**

**Right Angle Mount**



## CATALOG DRAWING (FOR REFERENCE ONLY)

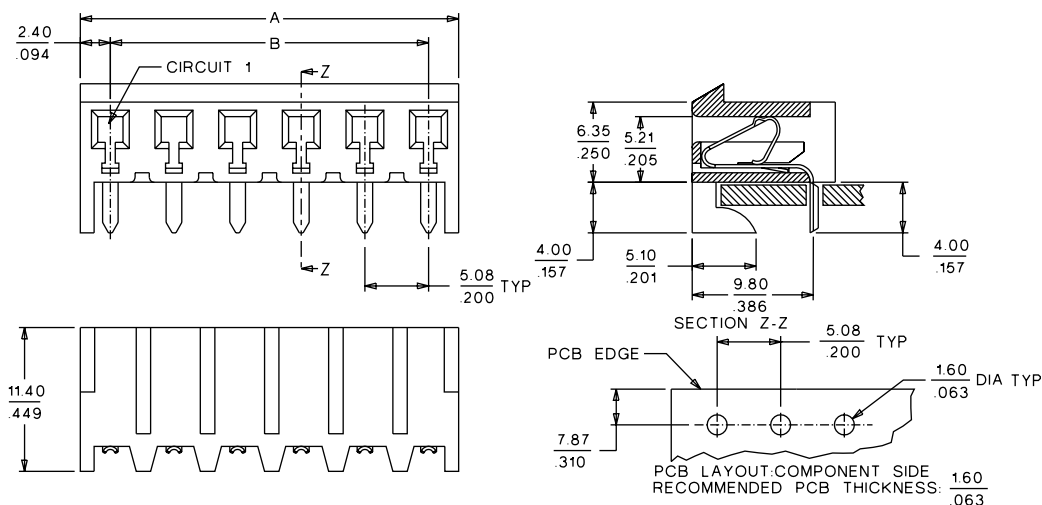

## ORDERING INFORMATION AND DIMENSIONS

| Circuits | Order No.  | Dimension     |               |
|----------|------------|---------------|---------------|
|          |            | A             | B             |
| 3        | 10-05-1033 | 14.96 (.589)  | 10.16 (.400)  |
| 4        | 10-05-1043 | 20.04 (.789)  | 15.24 (.600)  |
| 5        | 10-05-1053 | 25.12 (.989)  | 20.32 (.800)  |
| 6        | 10-05-1063 | 30.20 (1.189) | 25.40 (1.000) |