
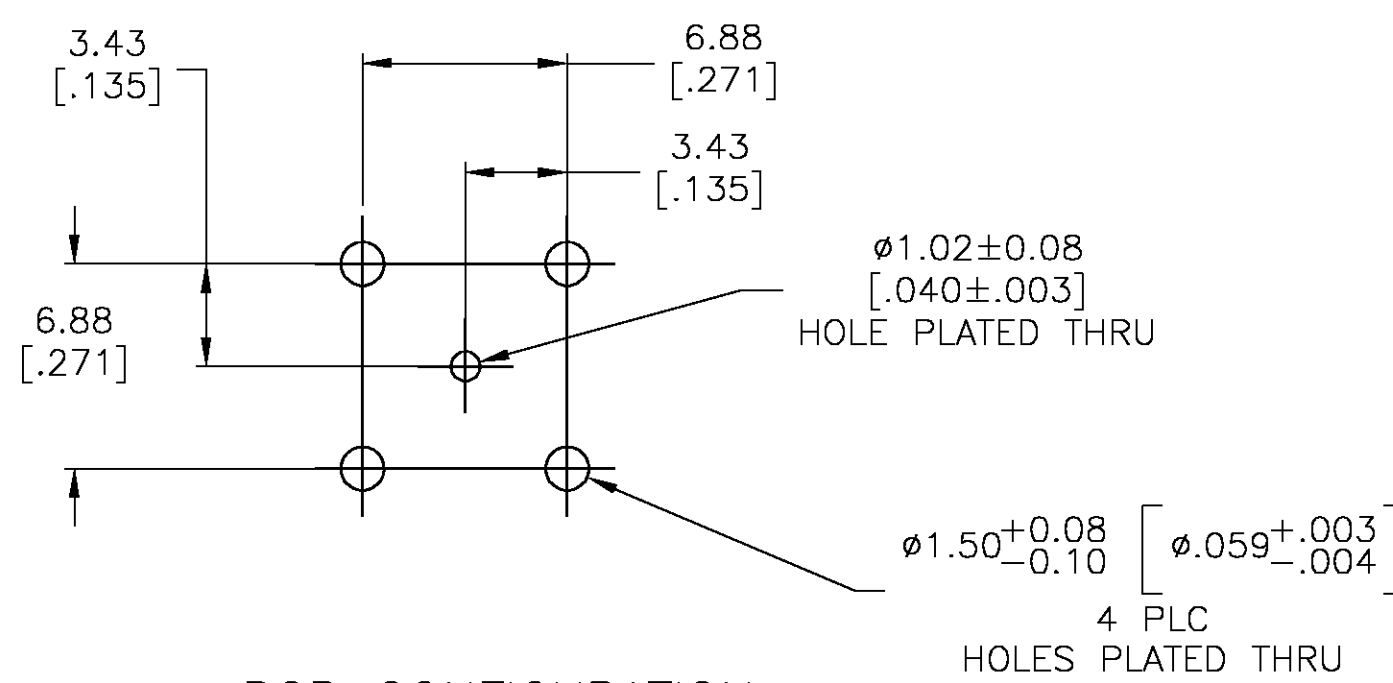
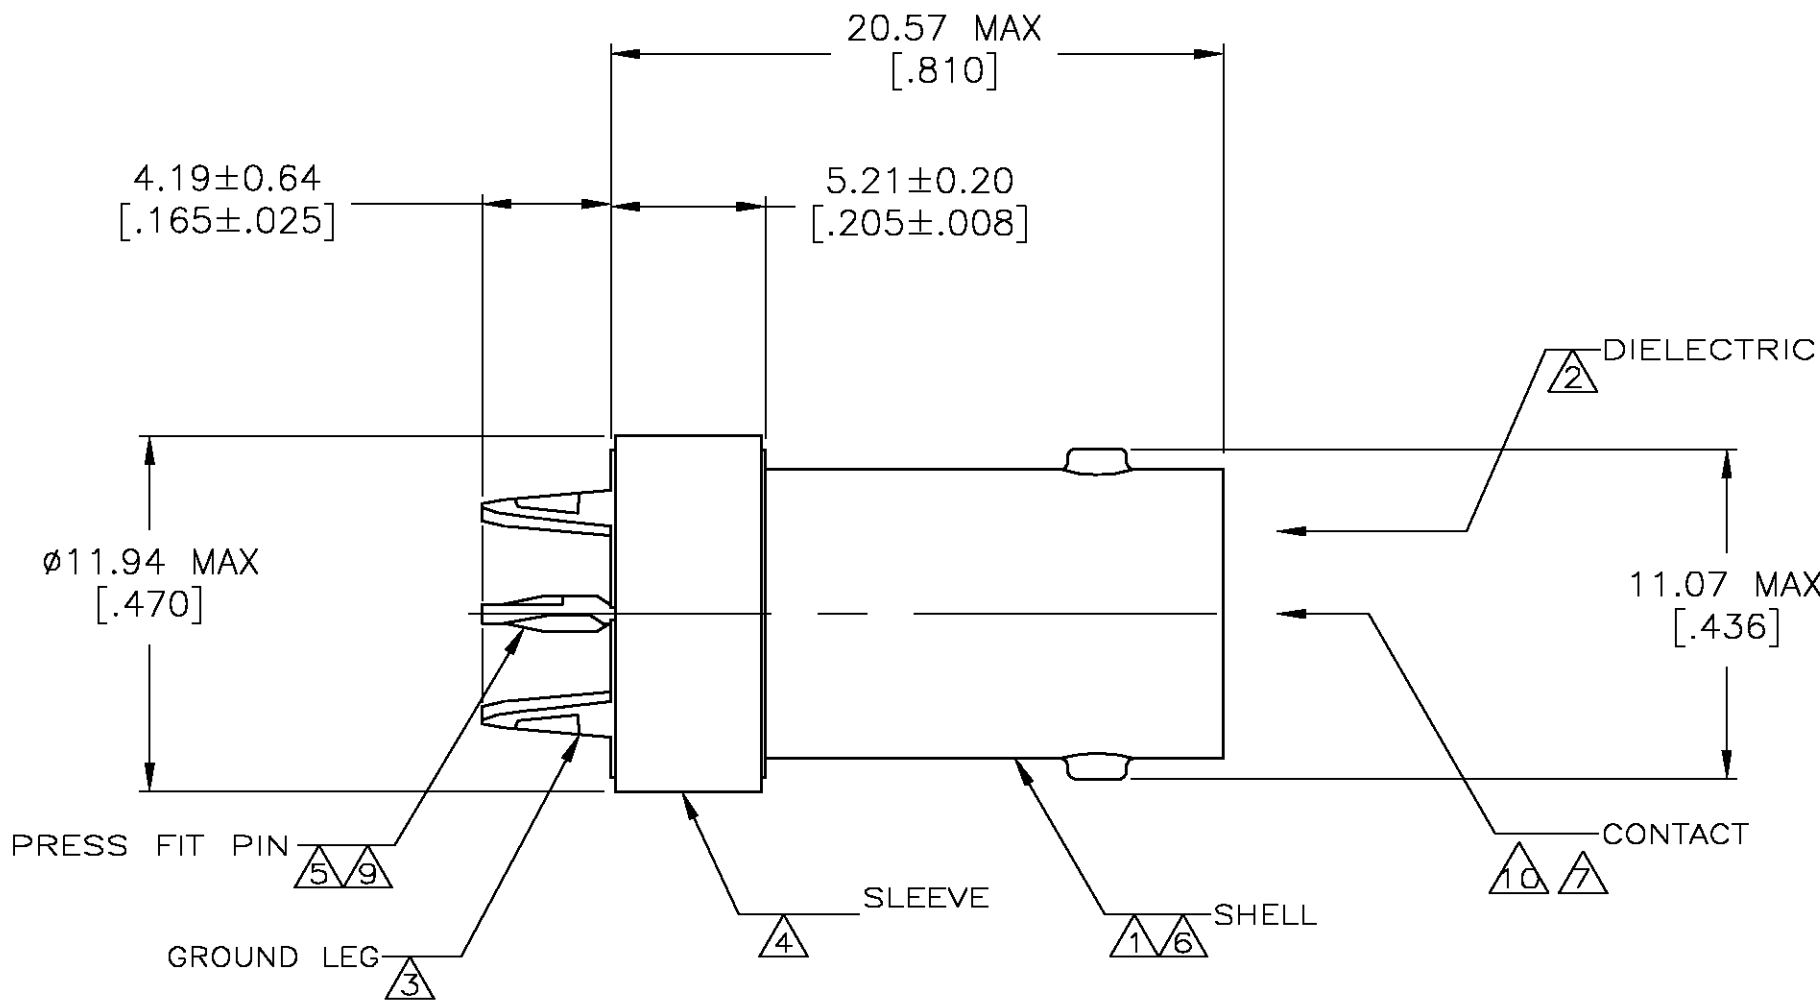


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AJ	16		L	PER EC 0S14-0184-04	01DEC2004	JGH
						APVD
						JL



- 1 ZINC PER QQ-Z-363.
- 2 PTFE PER MIL-P-19468.
- 3 COPPER-IRON ALLOY PER ASTM-B-465.
- 4 COPPER PER QQ-C-576.
- 5 COPPER-NICKEL ALLOY PER ASTM-B-122.
- 6 NICKEL PLATE PER QQ-N-290
3.81 μm [.000150] MINIMUM THICK.
- 7 GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
- 8 TIN PLATE PER ASTM-B-545,
2.54 μm [.000100] MIN THICK.
- 9 GOLD PLATE PER MIL-G-45204
- 10 BERYLLIUM COPPER PER ASTM-B-643
- 11 .010±.001 THICK, MYLAR (POLYESTER FILM) INSULATOR, AMP P/N 1274912-1, ATTACHED TO BOTTOM, (NOT SHOWN).
- 12 TIN PLATE 2.54 μm [.000100] MINIMUM THICK.

SUPERSEDED BY 222462-1	12	12	9-222462-0
	8	8	222462-4
	8	8	222462-2
	8	8	222462-1
	GROUND LEG	SLEEVE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. LIPPERT	OSMAR01	tyco <i>Electronics</i>		Tyco Electronics Corporation	
DIMENSIONS: MM [INCHES]		CHK D. TAYLOE	8-2-93			Harrisburg, PA 17105-3608	
		APVD J. LIPPERT	8-5-93	NAME RECEPTACLE, PCB, PRESS FIT, 75 OHM, BNC			
		PRODUCT SPEC 108-12103					
MATERIAL 1 THRU 5,10,11		APPLICATION SPEC 114-12001		SIZE A2	CAGE CODE 00779	DRAWING NO C-222462	RESTRICTED TO -
FINISH 6 THRU 10,12		WEIGHT -		SCALE 5:1		SHEET 1 OF 1	REV L
CUSTOMER DRAWING							