
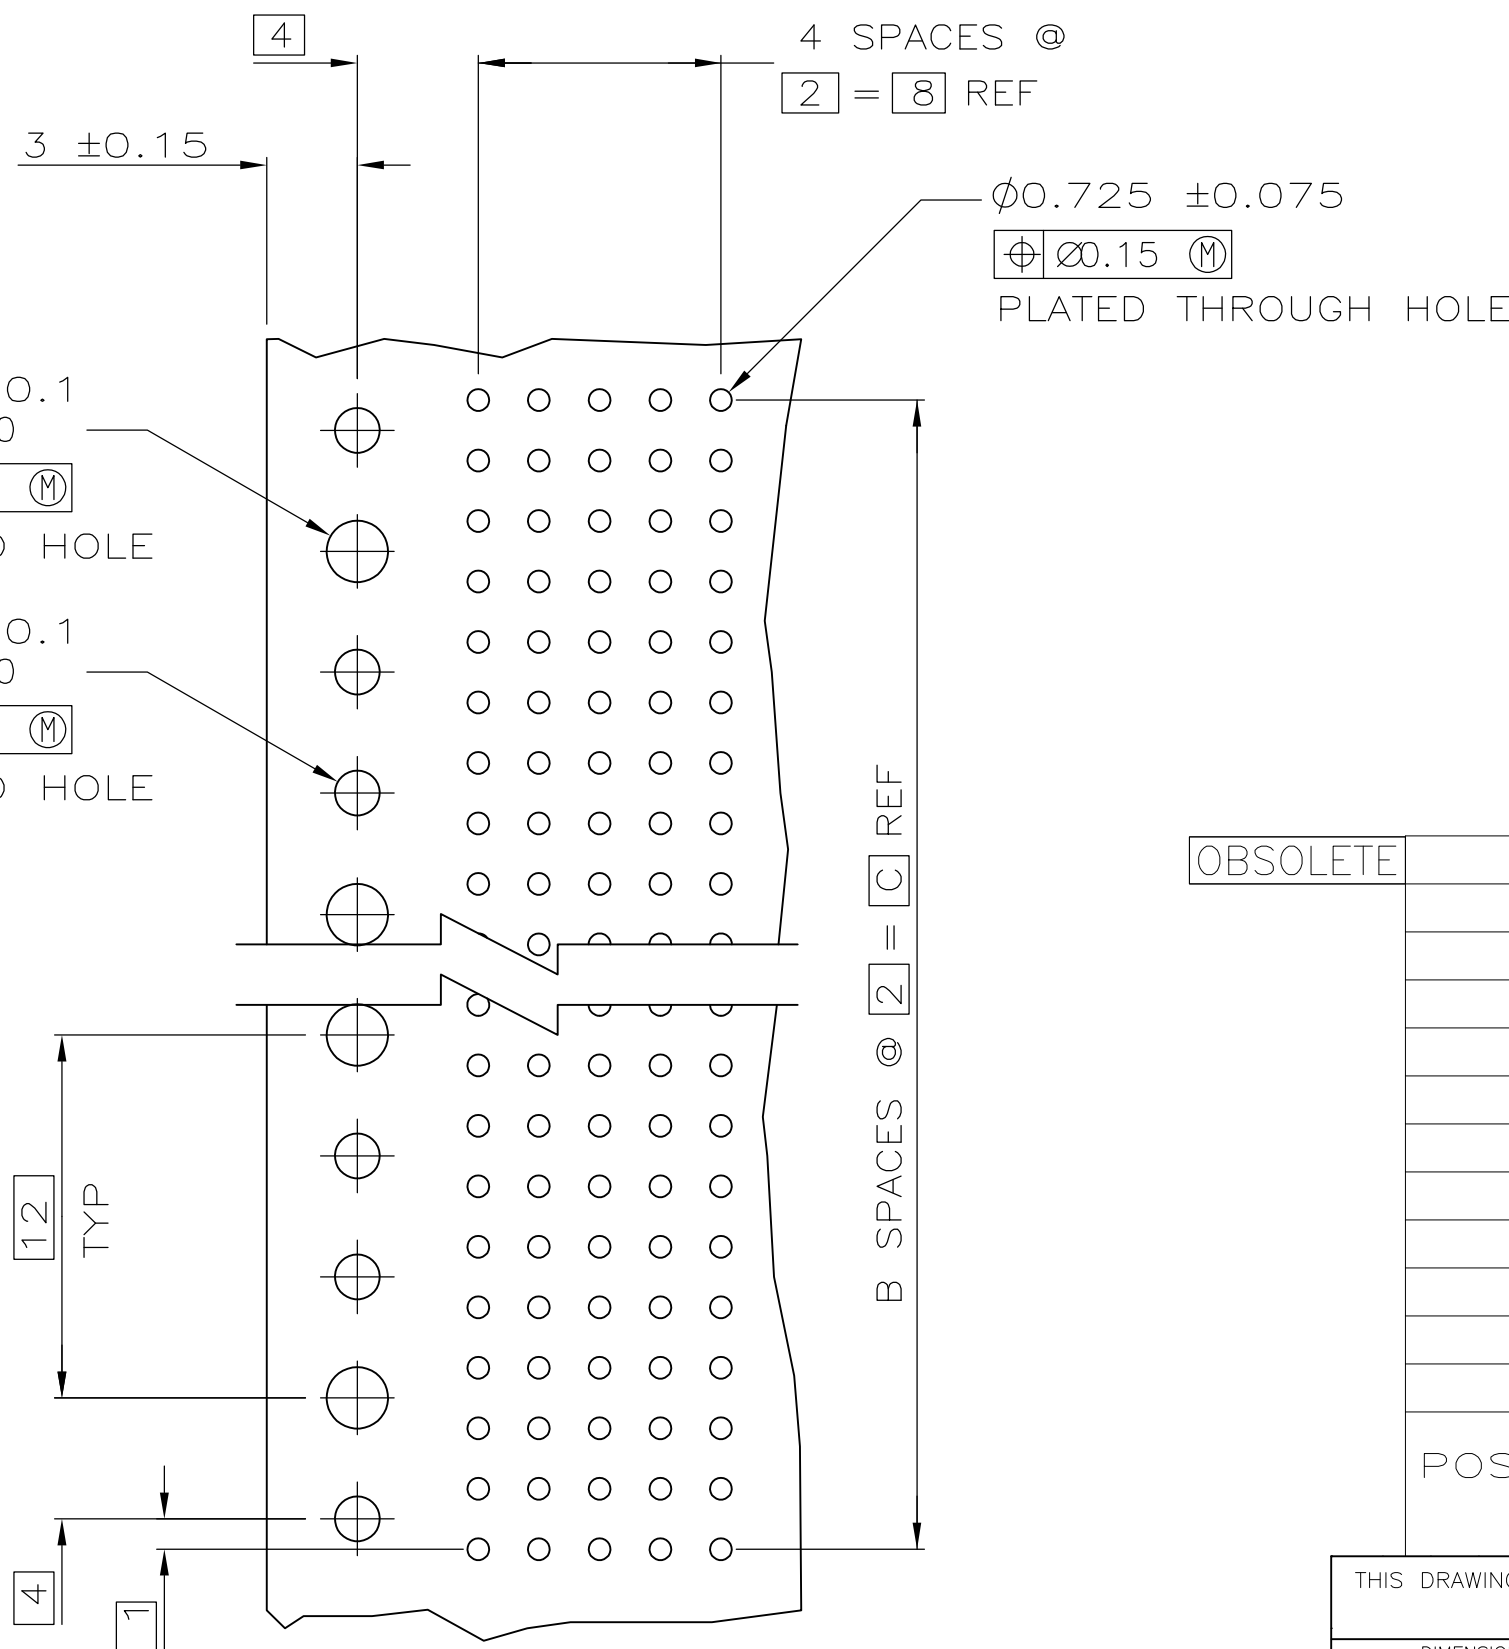
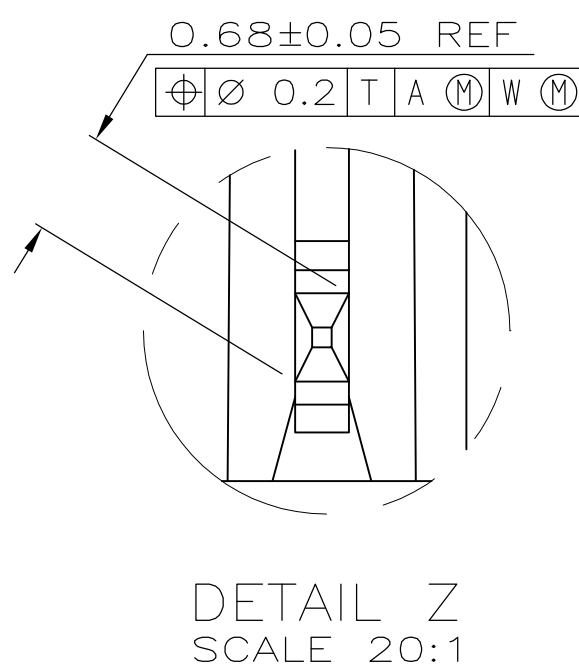
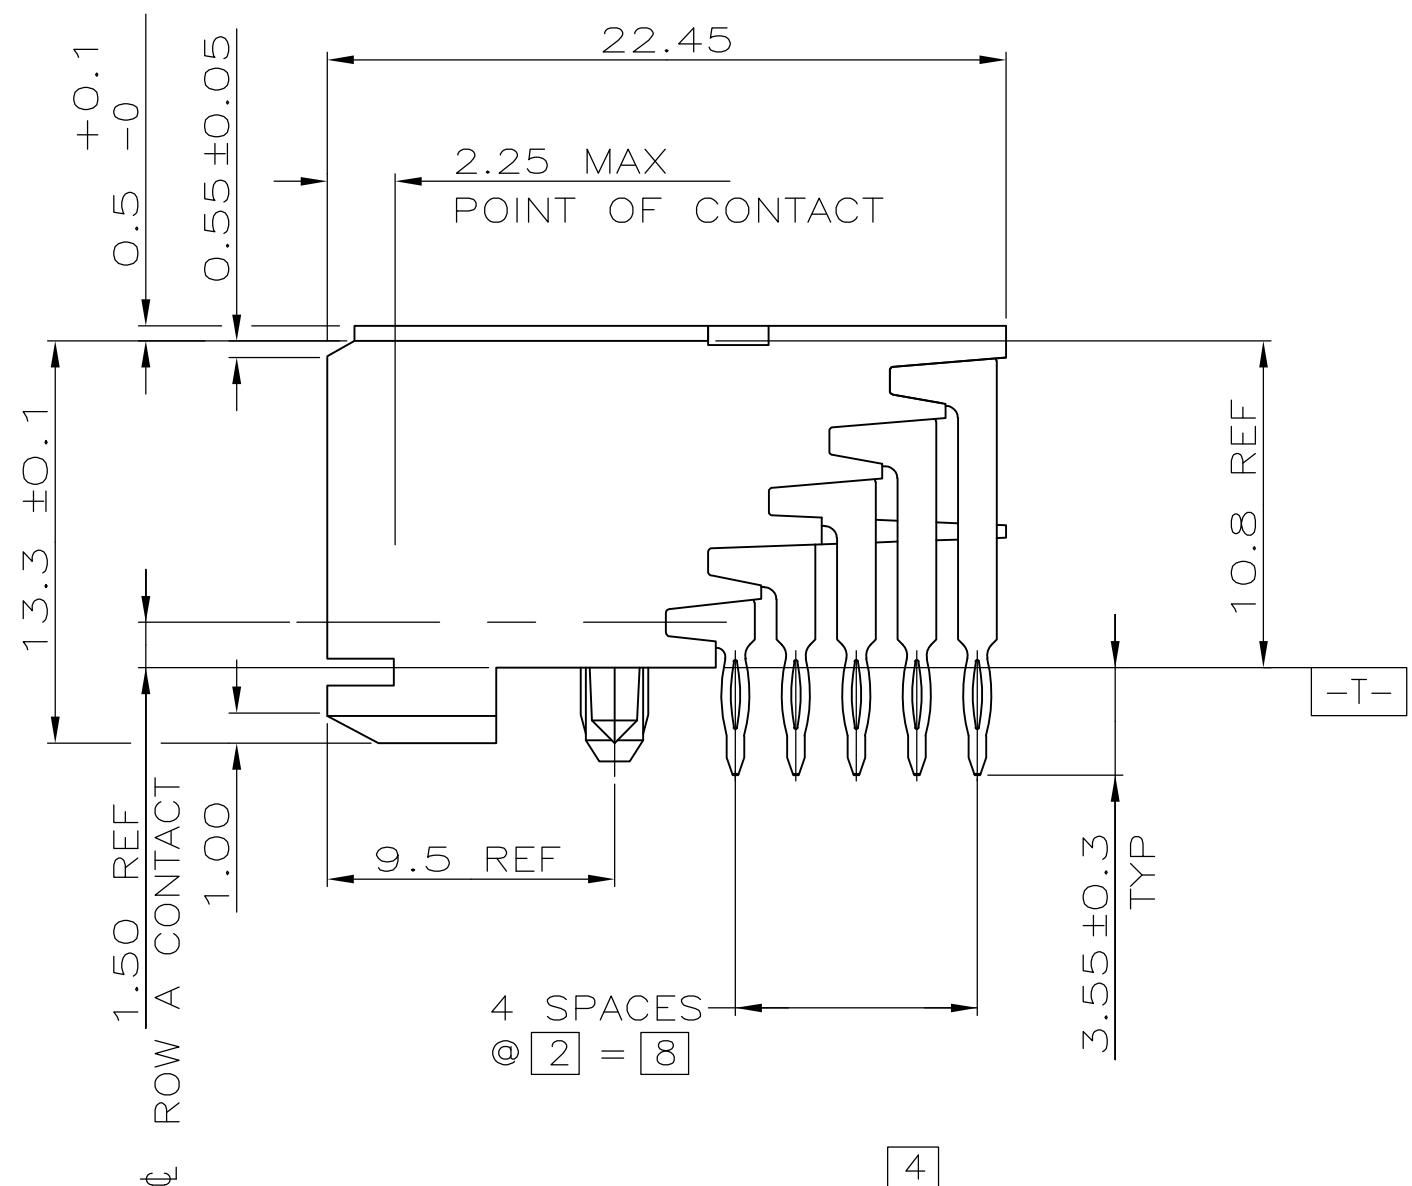
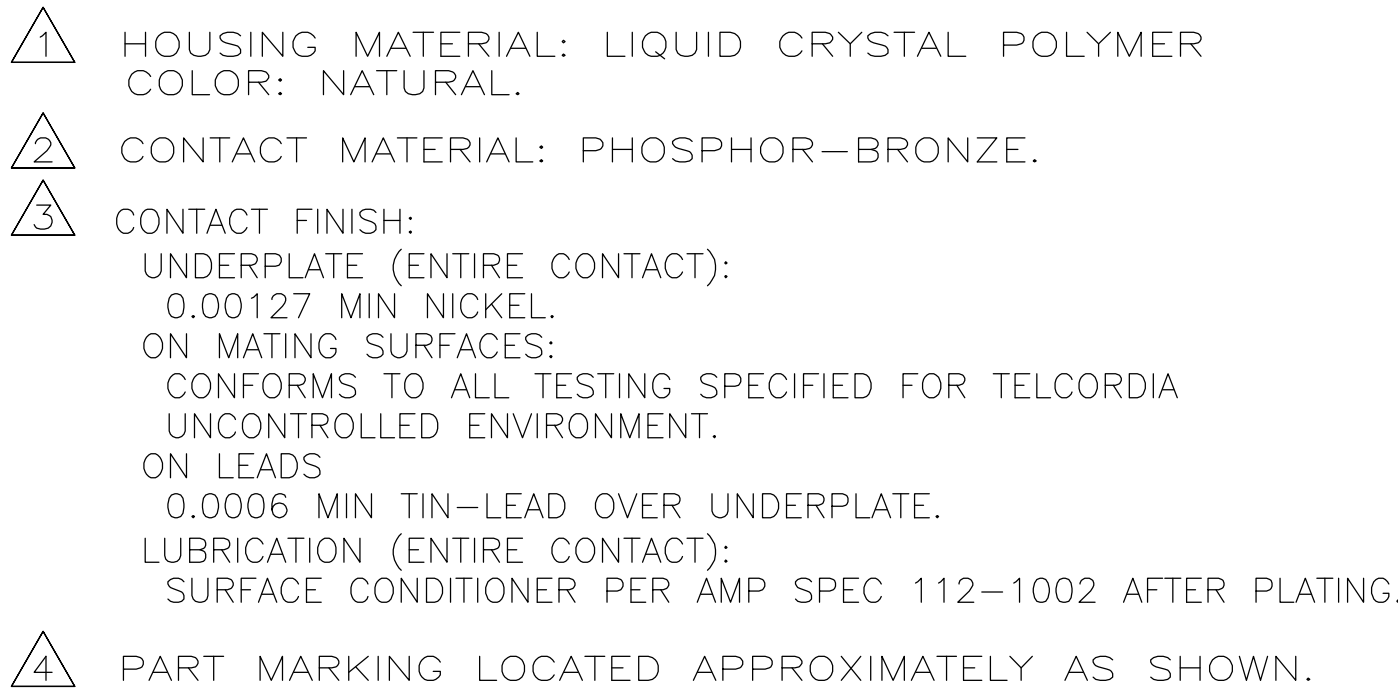





RECOMMENDED CIRCUIT PATTERN
PER IPC-D300 TYPE II, CLASS C
(COMPONENT SIDE)

OBSOLETE	NO	214	107	215.88		540	1-223008-2
	NO	130	65	131.88		330	1-223008-1
	NO	118	59	119.88		300	1-223008-0
	NO	106	53	107.88		270	223008-9
	NO	94	47	95.88		240	223008-8
	NO	82	41	83.88		210	223008-7
	NO	70	35	71.88		180	223008-6
	NO	58	29	59.88		150	223008-5
	NO	46	23	47.88		120	223008-4
	NO	34	17	35.88		90	223008-3
	NO	22	11	23.88		60	223008-2
	YES	10	5	11.88		30	223008-1
	POSITIONING PEGS	C	B	A	FINISH	NO. OF SIGNAL POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. 08/FEB/98 R. BUCHHEISTER CHK. 08/FEB/98 D. BACHTLE APPV. 08/FEB/98		 Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm 		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 P/LC ± - 1 P/LC ± - 2 P/LC ± 0.13 3 P/LC ± - 4 P/LC ± - ANGLES ± - FINISH		NAME ASSEMBLY, RECEPTACLE, SIGNAL, RIGHT ANGLE, Z-PACK 2mm FB, 5 ROW, PRESS FIT LEAD - SIZE CASE CODE DRAWING NO RESTRICTED TO A1 00779 C=223008 - WEIGHT - CUSTOMER DRAWING	
MATERIAL 				SCALE 4:1 SHEET 1 of 1 REV P	