

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST
GP	00

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	G1	REVISED PER ECO-06-020813	27/OCT/06	ZR	CR

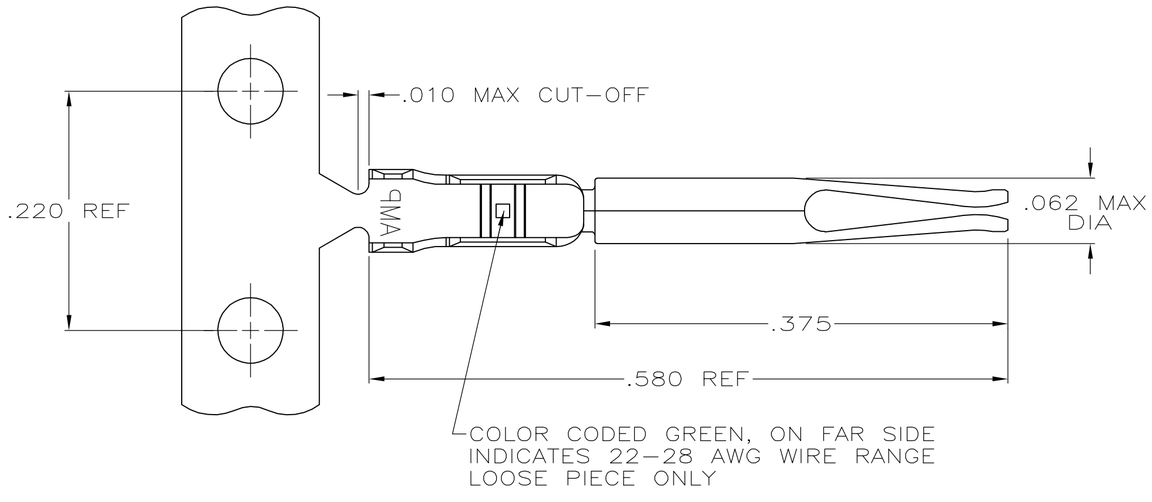

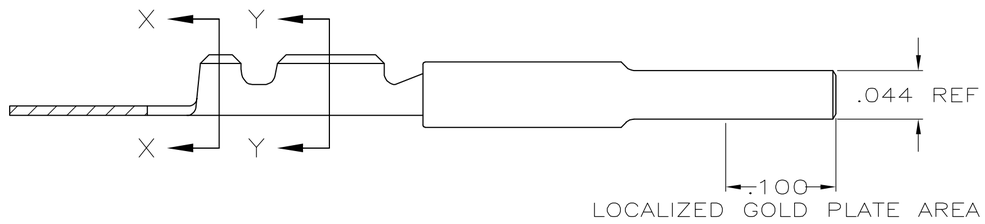



SECTION X-X
INSULATION BARREL



SECTION Y-Y
WIRE BARREL

1. FOR MINI APPLICATOR.
2. FOR HAND TOOL USE ONLY.
3. WIRE RANGE OF 22-28, INSULATION RANGE OF .030-.040.
4. GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290, TIN PLATING PER MIL-T-10727.
5. PLATED WITH .000030 GOLD IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000050 NICKEL.
6. PLATED WITH GOLD FLASH IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000030 NICKEL.
7. .000050 MIN GOLD OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
8. GOLD PLATING ON THE CARRIER STRIP IS NOT REQUIRED.
9. OBSOLETE.

PACKAGING	FINISH 4	LOOSE PIECE 2	PART NUMBER 1
SMALL PACK	6	9 748610-7	9 1-748610-1
–	7 8	9 748610-9	748610-8
STANDARD	6	9 748610-7	748610-5
–	5	748610-4	748610-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	–
1 PLC	±	–
2 PLC	±	–
3 PLC	±	.005
4 PLC	±	–
ANGLES	±	0° 30'

MATERIAL: PHOS BRONZE PER QQ-B-750

FINISH: SEE TABLE

DWN	C.RICHARD	1-12-88
CHK	W.LENKER	1-14-88
APVD	V.KUMAR	1-19-88
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

tyco Electronics — Tyco Electronics Corporation, Harrisburg, PA 17105-3608

NAME: SOCKET CONTACT, SIZE 22 DF, 22-28 AWG, W/.030-.040 DIA INSULATION SUPPORT

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-748610	–

CUSTOMER DRAWING | SCALE 10:1 | SHEET 1 OF 1 | REV G1

748610