
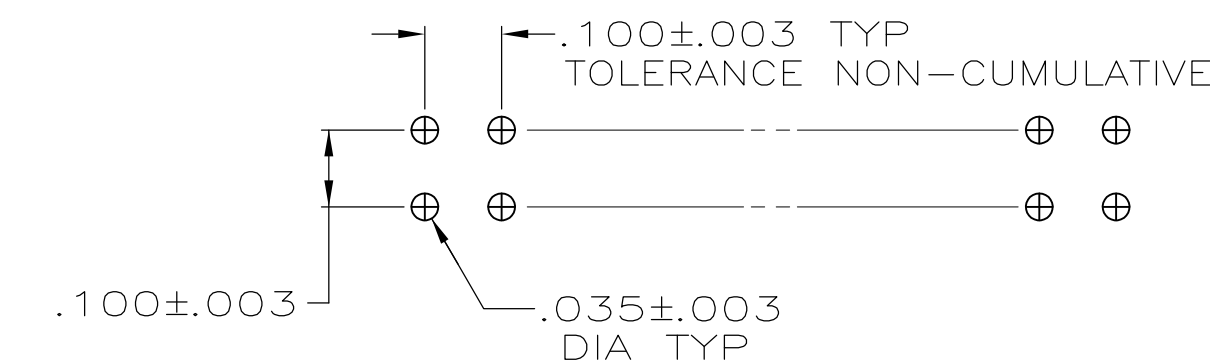
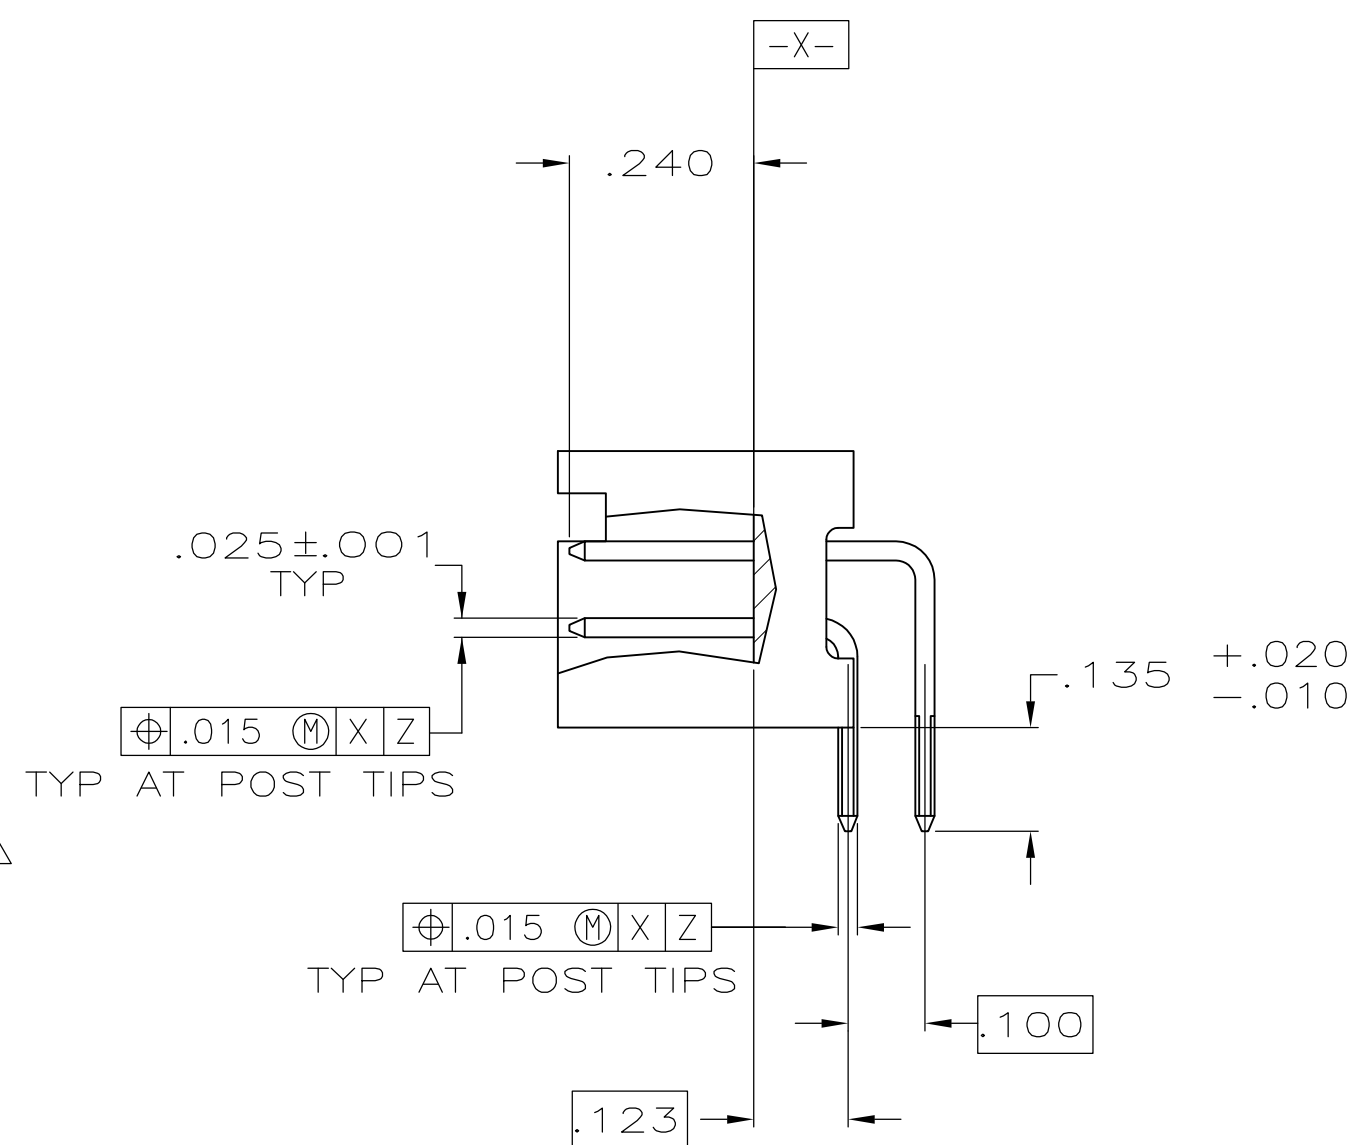


LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			M1	REVISED PER ECO-11-004835	11MAR11	RK	HMR

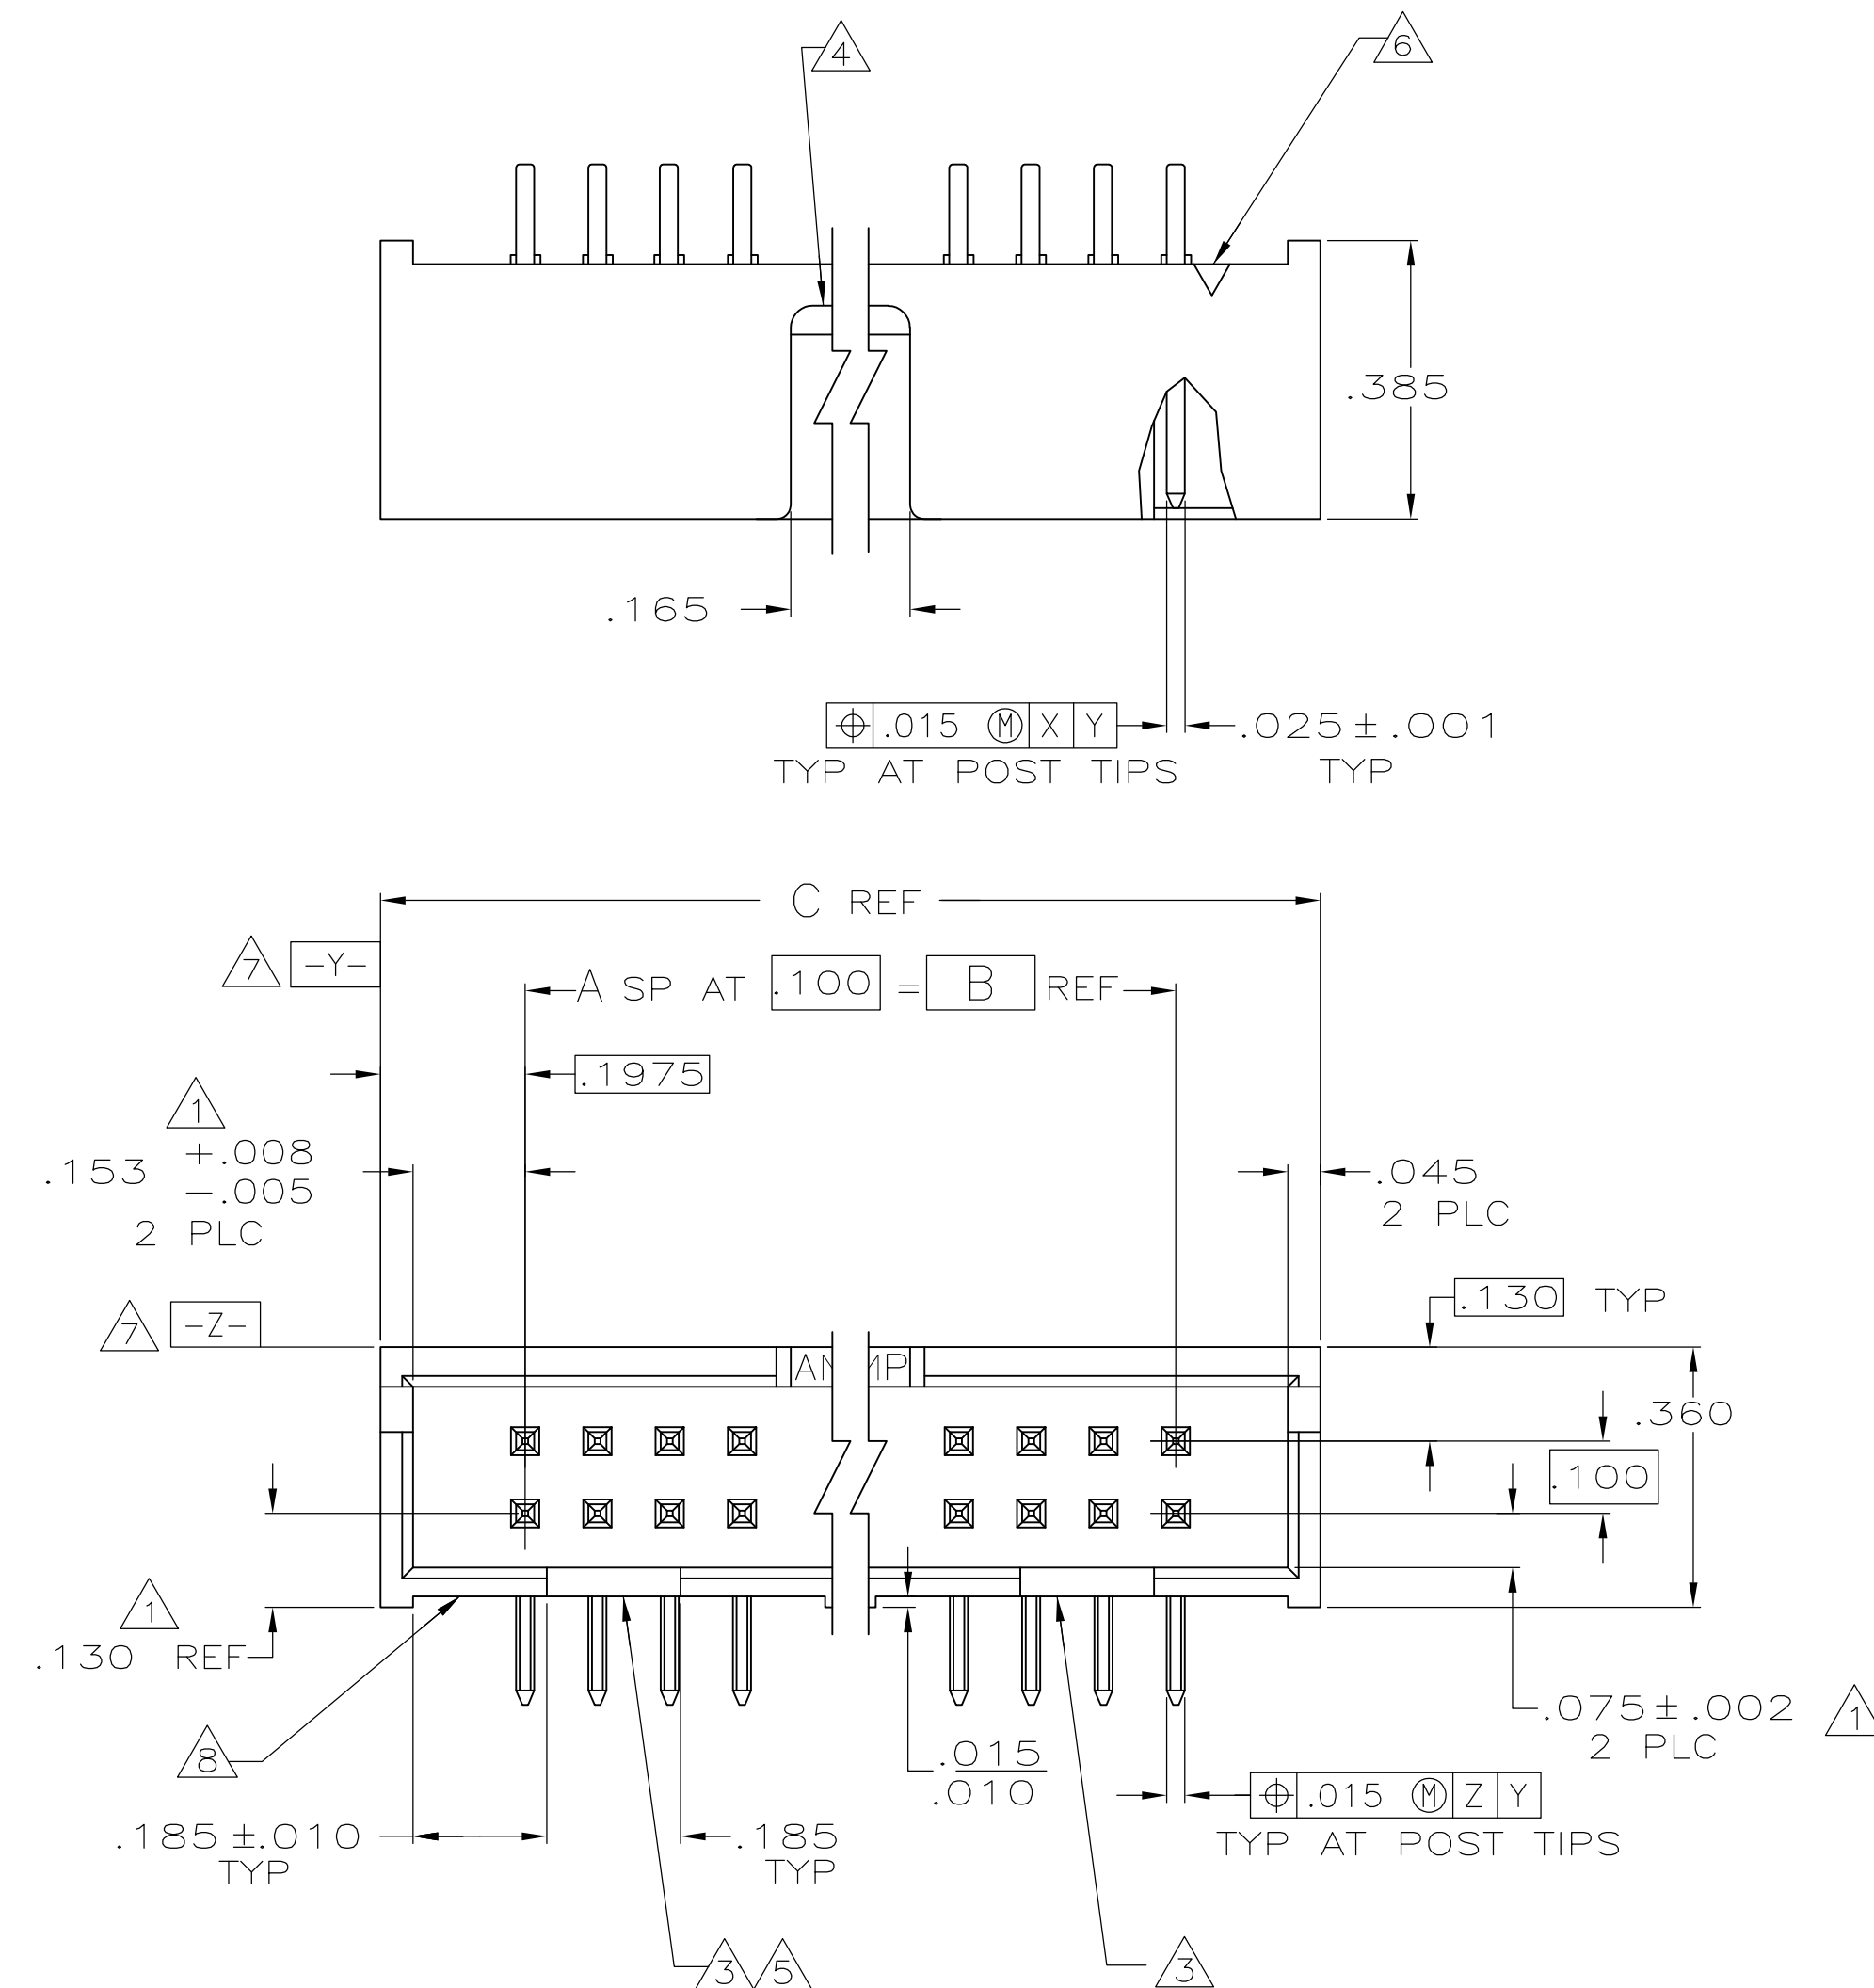

RECOMMENDED HOLE LAYOUT
FOR MANUAL INSERTION

OBSOLETE	3.300	2.900	29	60	1-103311-2
	3.100	2.700	27	56	1-103311-1
	2.800	2.400	24	50	1-103311-0
OBSOLETE	2.500	2.100	21	44	103311-9
	2.300	1.900	19	40	103311-8
	2.000	1.600	16	34	103311-7
OBSOLETE	1.600	1.200	12	26	103311-6
	1.300	.900	9	20	103311-5
	1.200	.800	8	18	103311-4
	1.100	.700	7	16	103311-3
	1.000	.600	6	14	103311-2
	.800	.400	4	10	103311-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG 8-27-87 H. MOLL CHK 9-4-87 L. A. MAYER		 TE Connectivity	
DIMENSIONS: INCHES 		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± - FINISH		NAME R. FLICKER 9-4-87 PRODUCT SPEC 108-40018 APPLICATION SPEC -	
MATERIAL BLACKING: GLASS FILLED NYLON OPT. BLACK UL 94V-0 RATED CROTT 1000				WEIGHT - CUSTOMER DRAWING	
				SIZE CAGE CODE DRAWING NO A1 00779 C=103311	
				RESTRICTED TO - SCALE 4:1 SHEET 1 of 1 REV M1	