
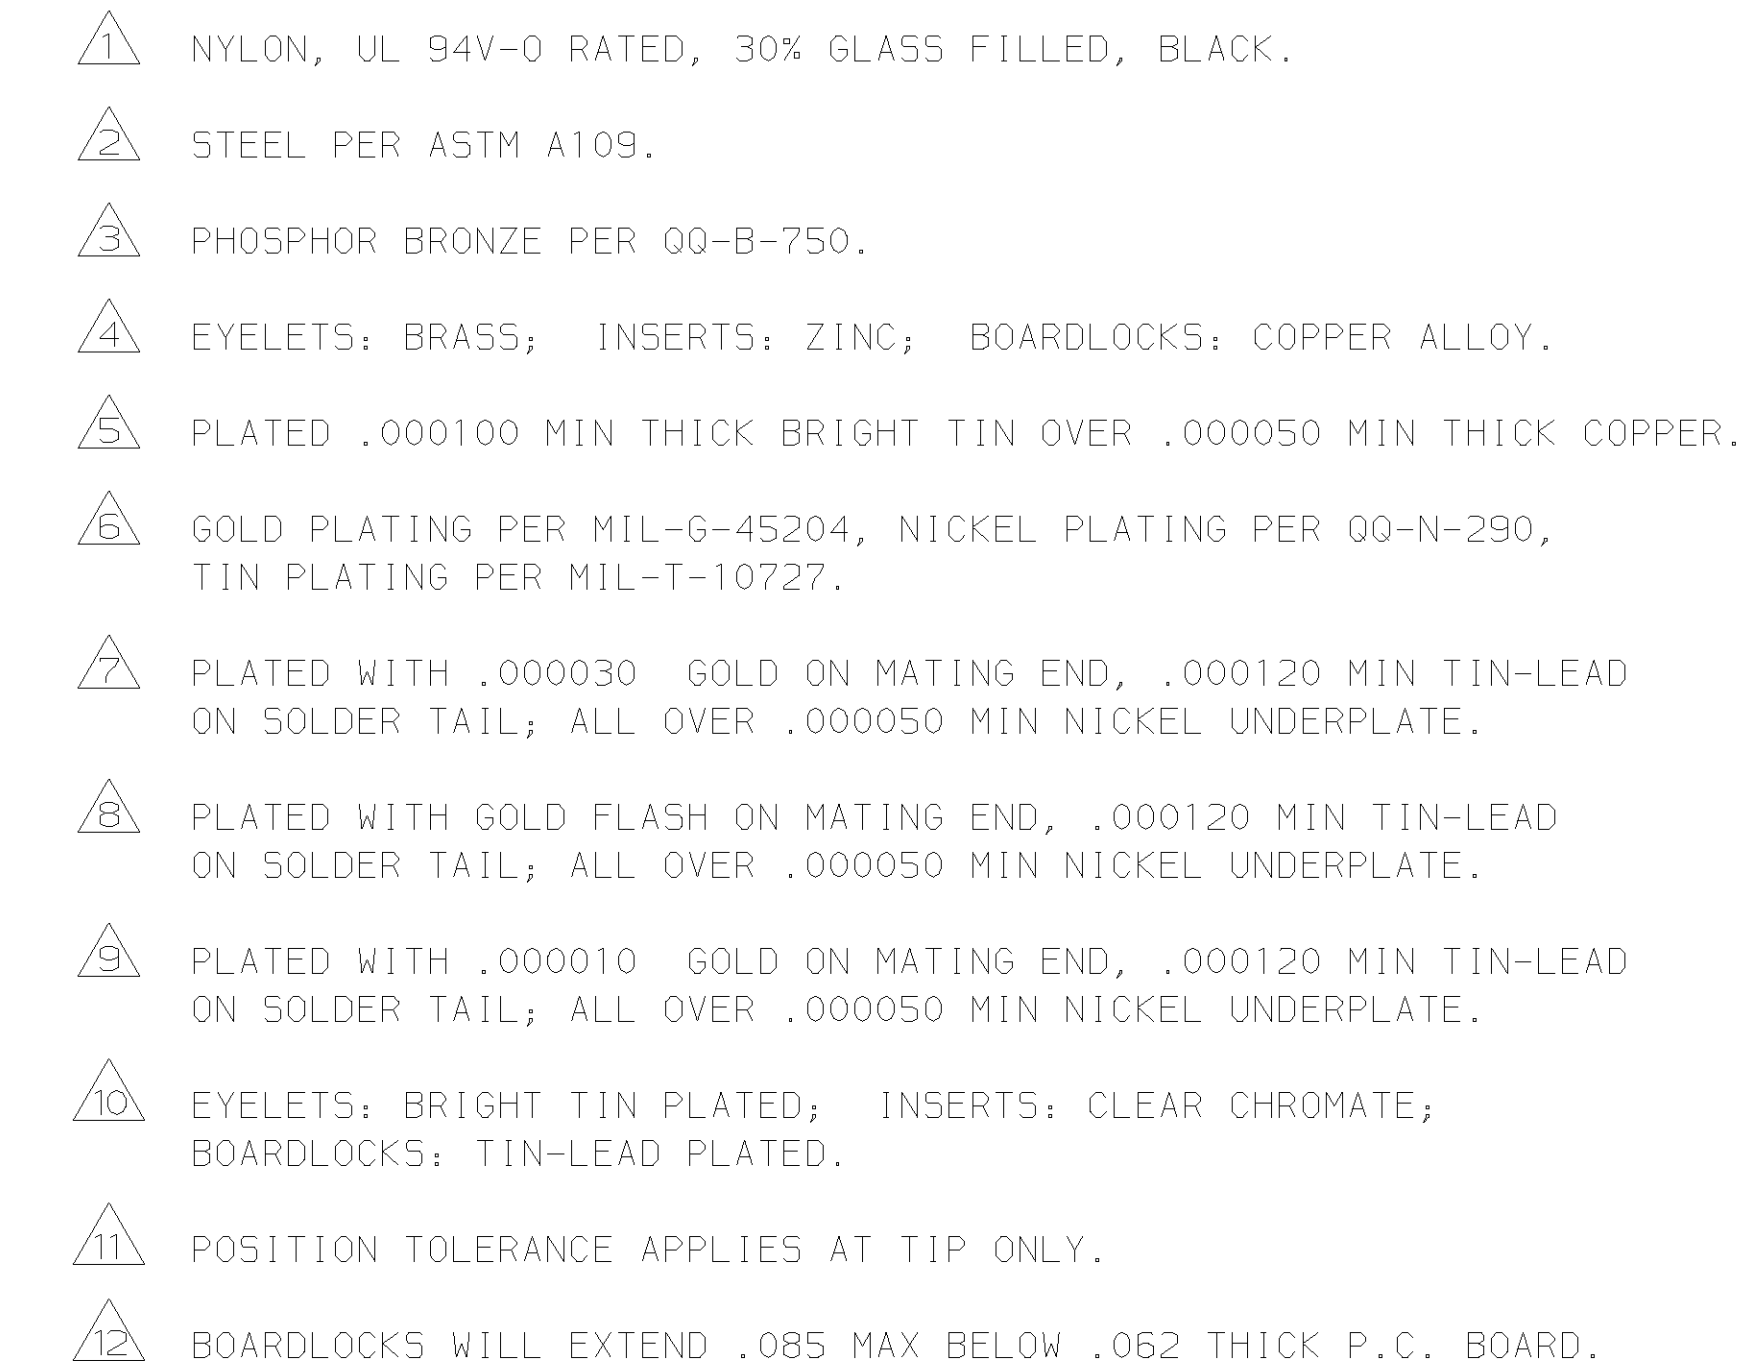
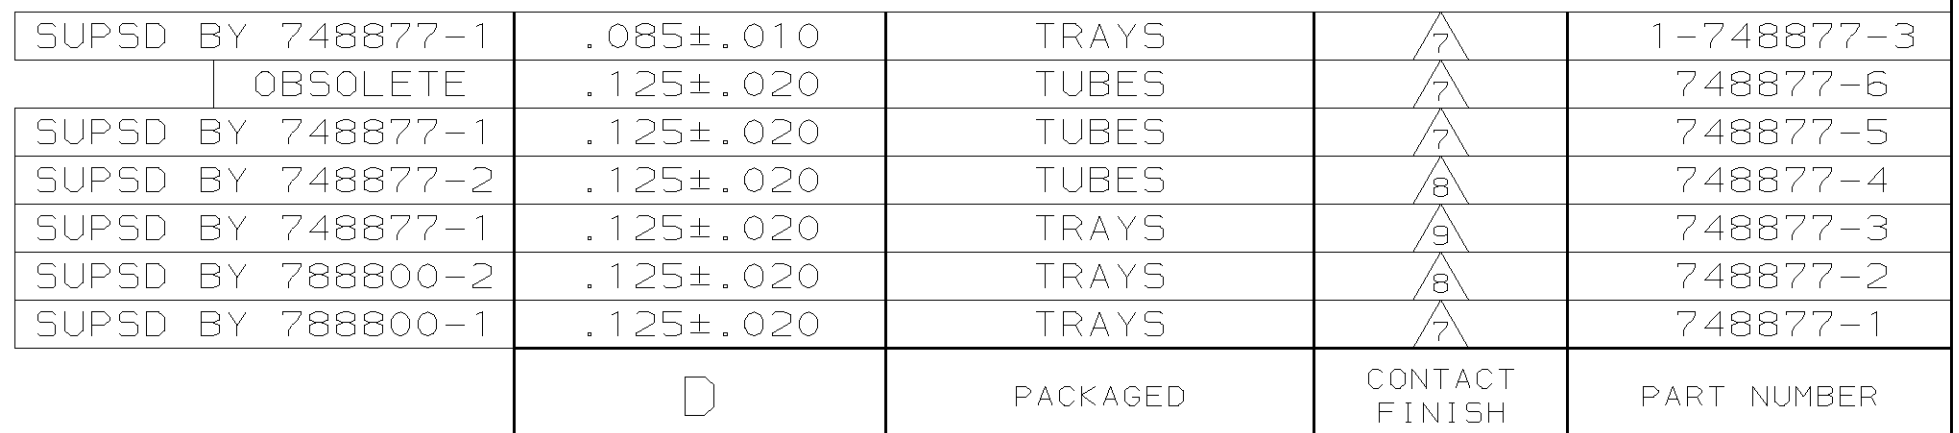


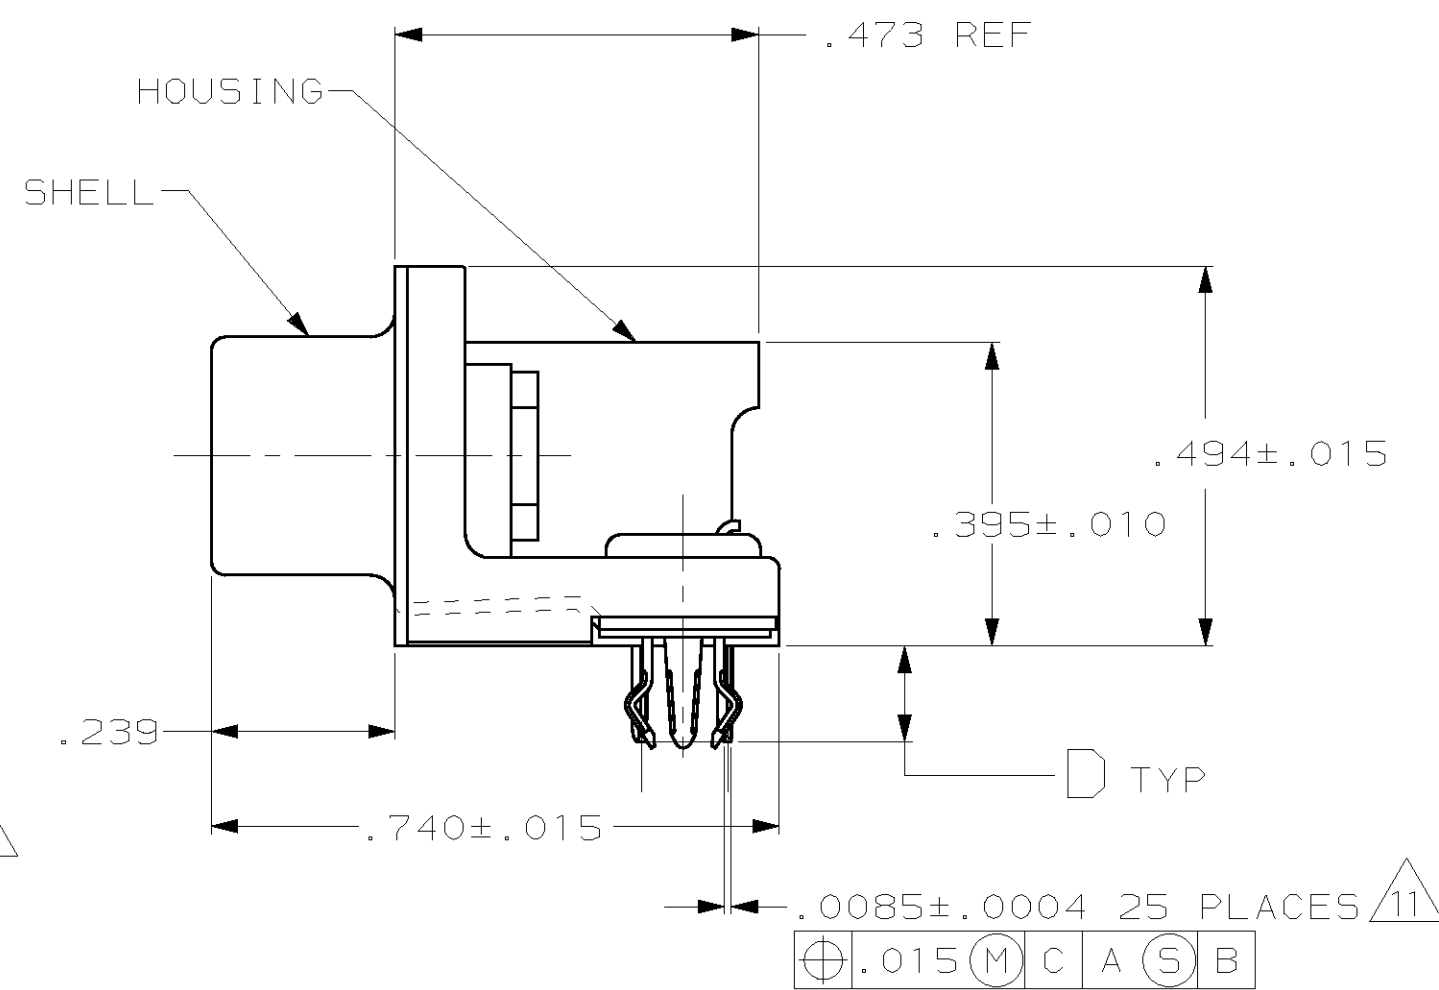

13. COMPATIBLE WITH TYPICAL HIGH TEMPERATURE SOLDERING APPLICATIONS TO A MAXIMUM OF 225°C FOR A MAXIMUM DURATION OF 90 SECONDS. TEMPERATURE TO BE MEASURED ON CONNECTOR SURFACE.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN S.G. SMITH	21 DEC 08	AMP		AMP Incorporated	
				CHE G.R. DEFLAUGH	21 DEC 08			Harrisburg, PA 17105-3608	
DIMENSIONS: [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		FORD B.H. MOSSER	03 JAN 09	NAME:	RECEPTACLE ASSEMBLY, SIZE 3, 25 POSITION, METAL SHELL, RIGHT ANGLE .318 SERIES, WITH THREADED INSERTS AND BOARDLOCKS,AMPLIMITE 111®		
		P.L.C. ±. P.O.E. ±. F.P.C. ±.005 F.A.C. ±. ANGLES ±.2°		PRODUCT SPEC 108-1226 APPLICATION SPEC 114-40028		SIZE CASE CODE (DRAWING NO.) A1 00775 C-748877		RESTRICTED TO	
MATERIAL:		FINISH:		WEIGHT -		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV 5	
HOUSING: △ CONTACTS: △		CONTACTS: SEE TABLE							
SHELL: △ HARDWARE: △		SHELL: △ HARDWARE: △							