


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT BY

REVISIONS					DATE	APPROVED
P	F	ZONE	LTR	DESCRIPTION		
		Y1		REVISED PER ECO-11-005294	07APR11	HMR

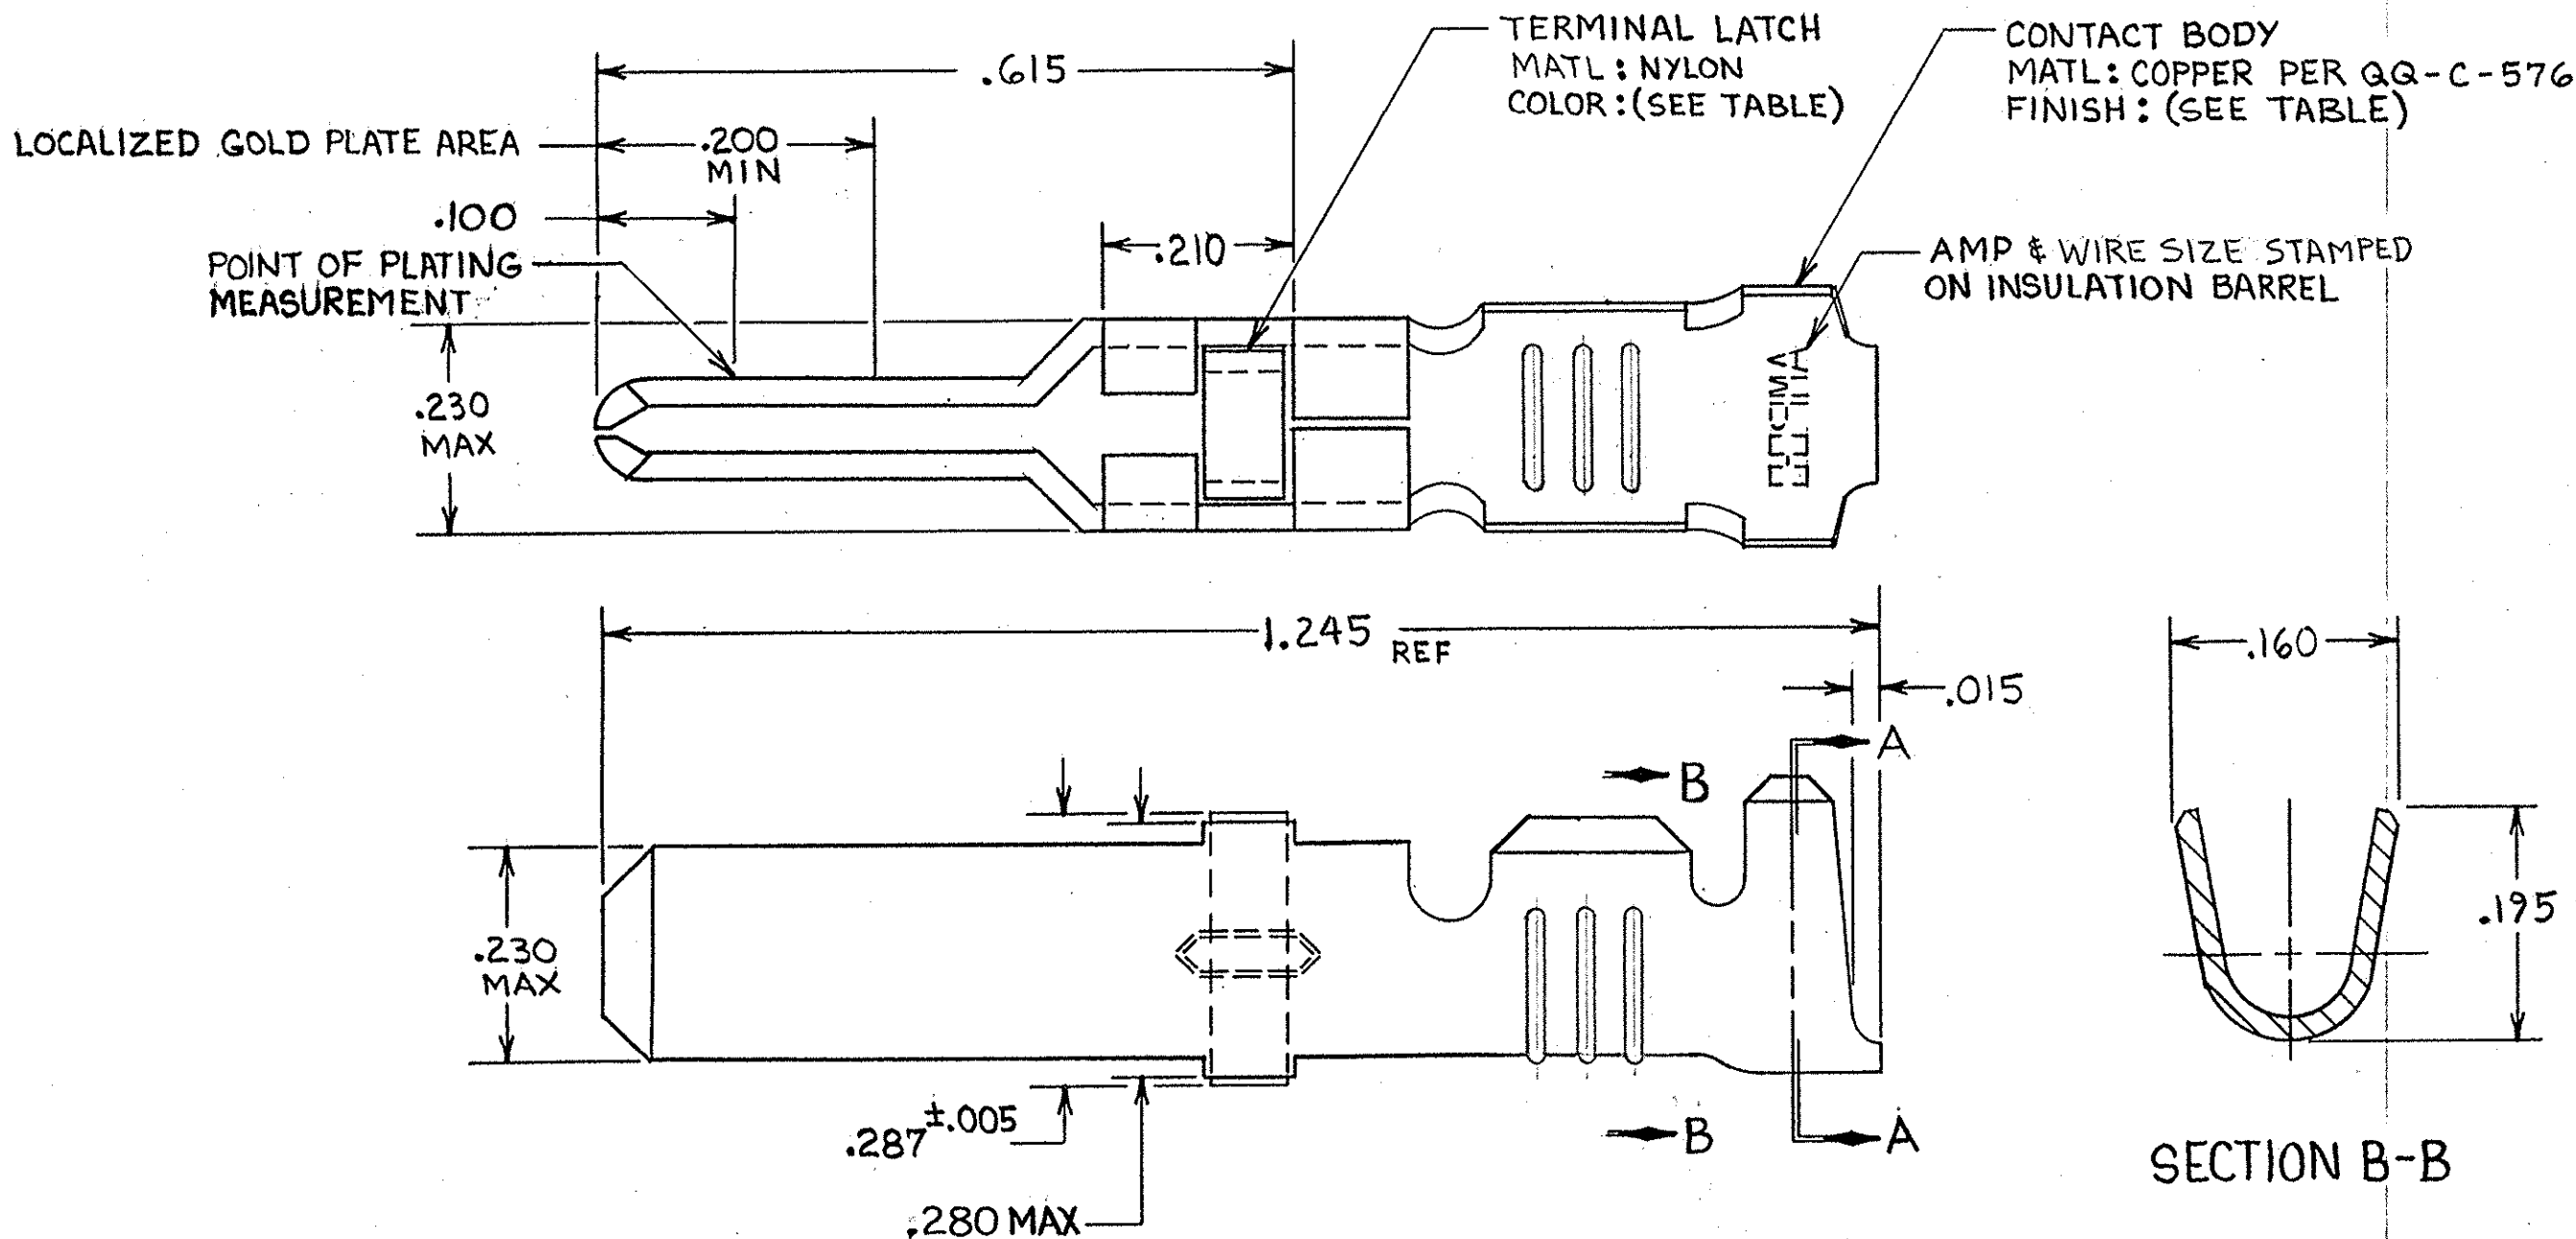

1. REELED FOR USE WITH STANDARD APPLICATORS.
2. REELED FOR USE WITH HEAVY DUTY MINI-APPLICATORS.
3. PLATED WITH .000100 MIN SILVER PER QQ-S-365.
4. PLATED WITH .000015 MIN GOLD PER MIL-G-45204 IN THE LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER .000030 MIN NICKEL PER QQ-N-290.
5. PLATED WITH .000030 MIN GOLD PER MIL-G-45204 IN THE LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER .000030 MIN NICKEL PER QQ-N-290.
6. PLATED WITH .000050 MIN 93-7% TIN-LEAD ALLOY OVER .000030 MIN NICKEL PER QQ-N-290.
7. WIRE RANGE = 12-16 AWG.
8. INSULATION RANGE = .140-.165 DIA.
9. PLATED TIN (NO LEAD) .000050 MIN THK PER ASTM-B-545 OVER NICKEL .000050 MIN THK PER QQ-N-290.

TERMINAL LATCH COLOR	FINISH	STRIP ASS'Y P/N REF	STRIP ASS'Y P/N REF	LOOSE PIECE P/N ASS'Y
BLACK	9	1-66255-2	1-66255-1	66261-5
NATURAL	3	66255-8	66255-7	66261-4
BLACK	4	66255-4	66255-3	66261-3
BLACK	5	66255-6	66255-2	66261-2
BLACK	6	66255-5	66255-1	66261-1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ±.010 ANGLES ±		CONTRACT NO 9-27-85		TE Connectivity	
MATERIAL SEE CALLOUT		DR Rick Rodabaugh CHK Larry G. Lawner APPD B. L. Boland APPD Kennis E. Smith		NAME MALE TYPE XII CONTACT LOOSE PIECE ASS'Y	
FINISH SEE DASH NO		DSGN APPD OTHER APPD		SIZE C	FSCM NO 00779
				DRAWING NO 66261	
				SCALE NTS	SHEET