

D

D

C


C

B





B

A

A

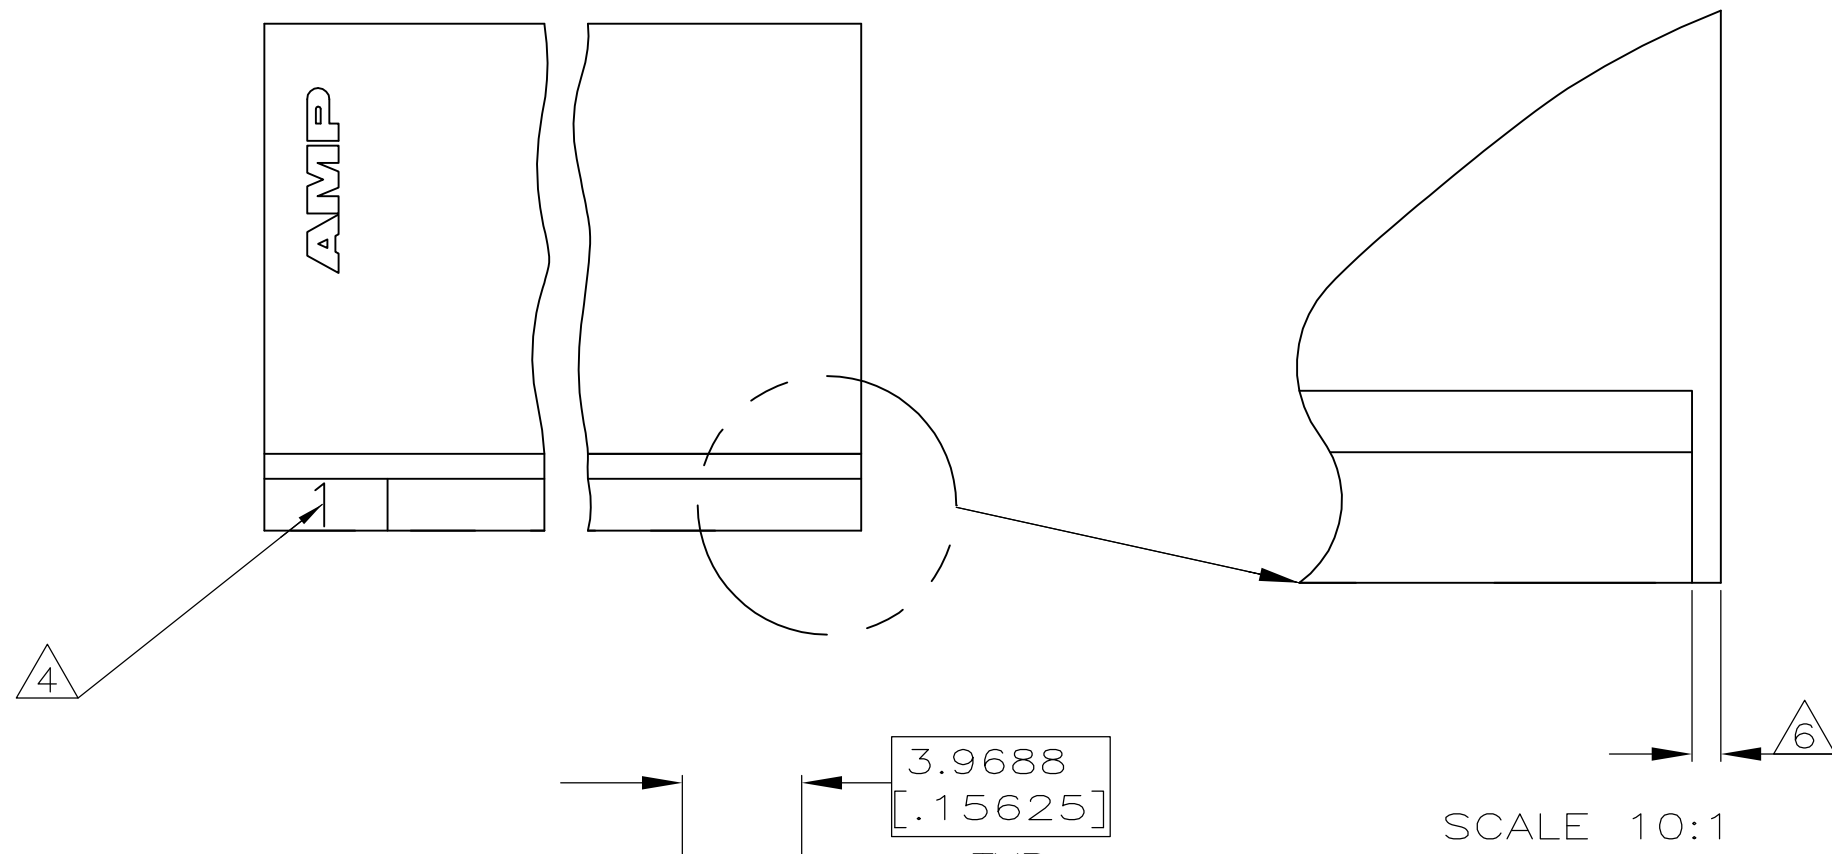

SCALE 10:1

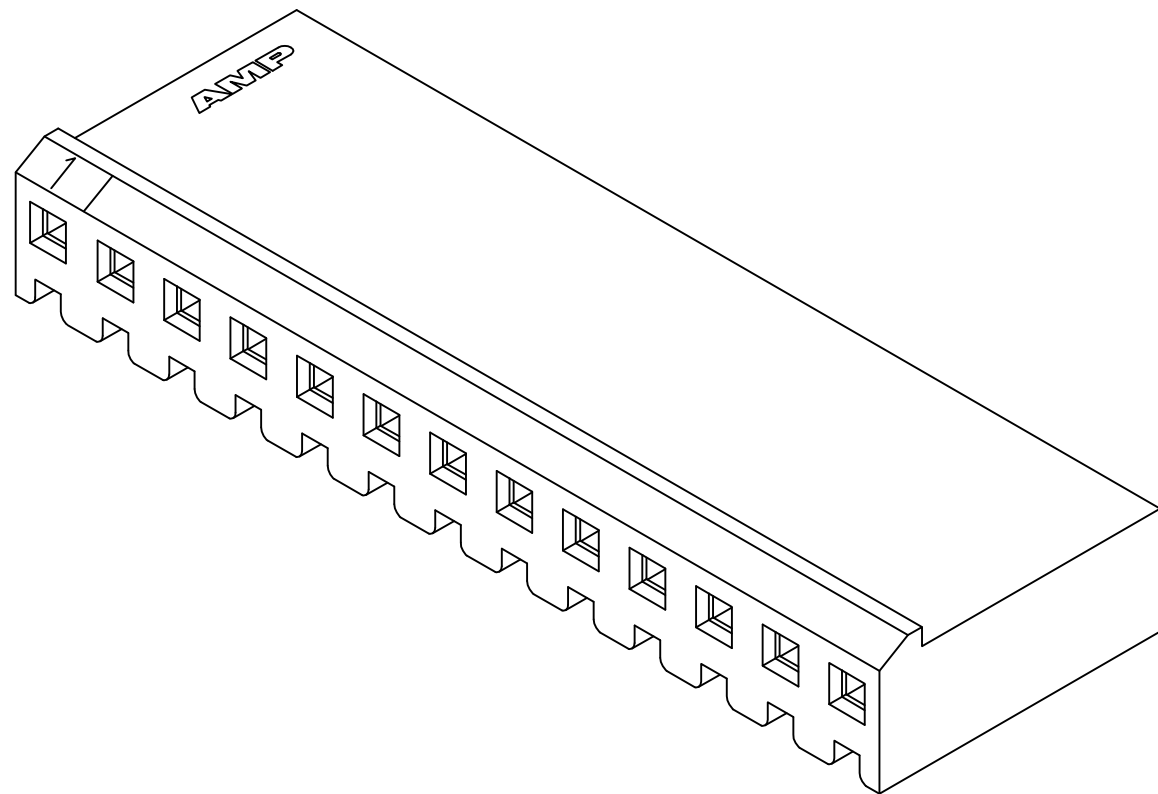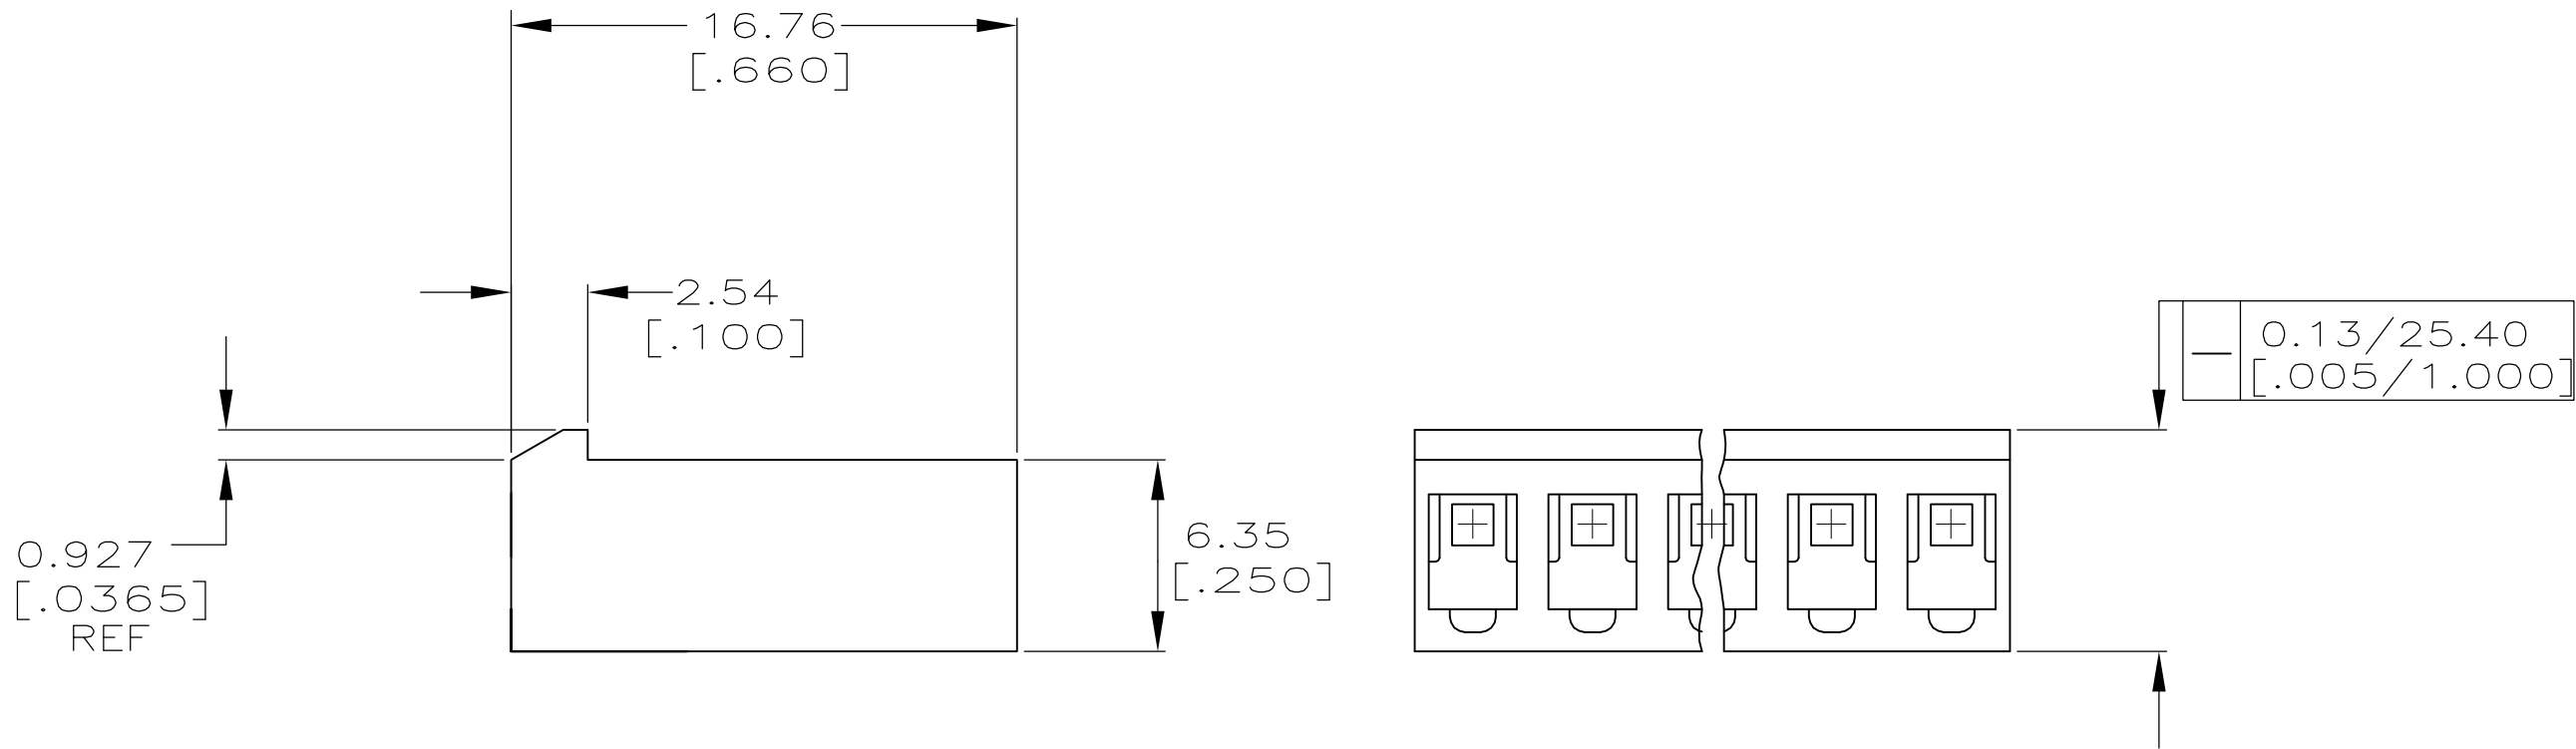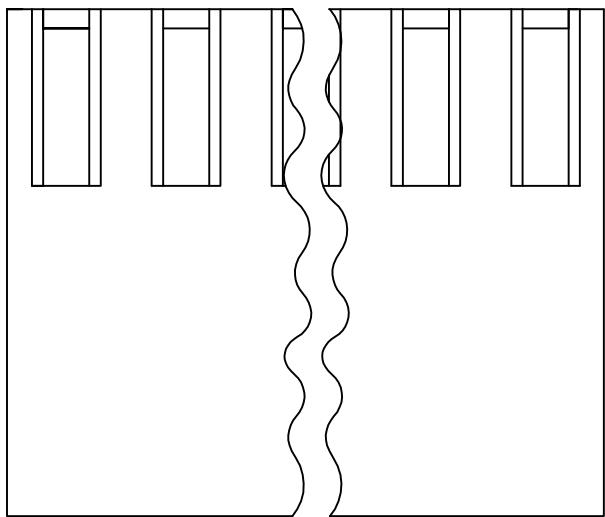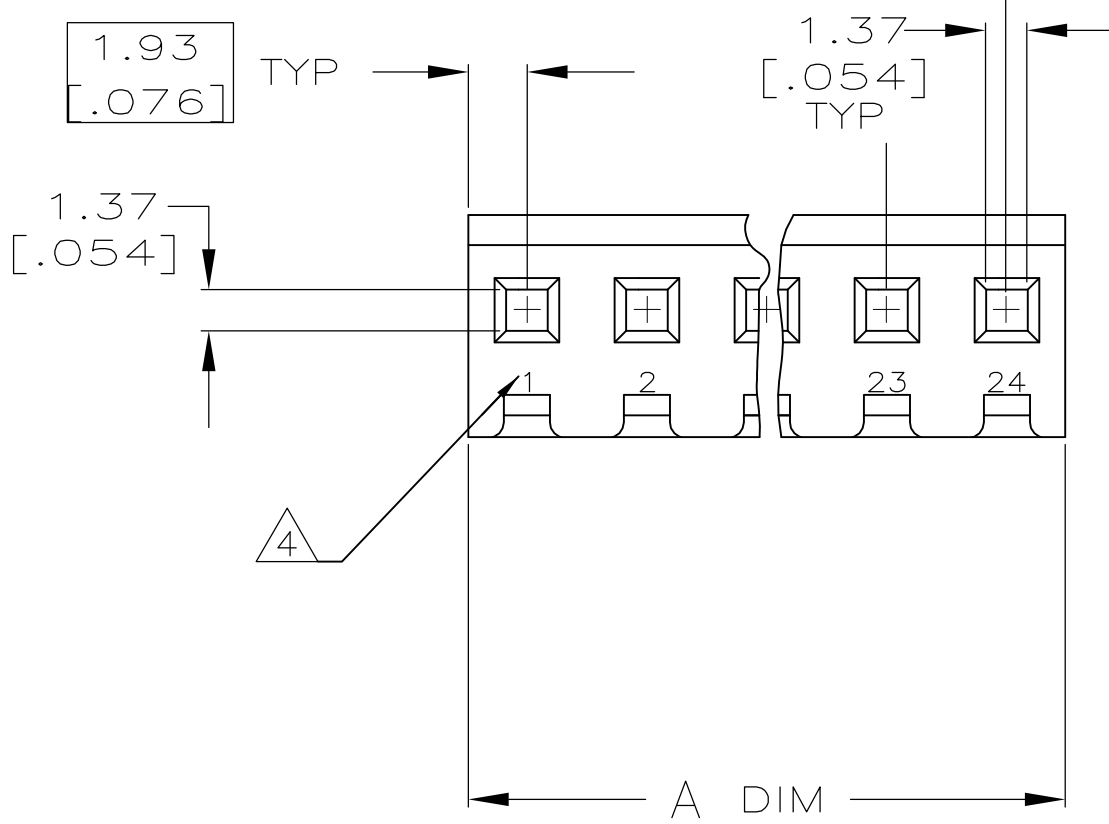

3-DIMENSIONAL MODEL
NTS

1. UNIT ACCEPTS 1.14 [.045] SQUARE OR ROUND POST.
 2. UNIT ACCEPTS STANDARD SL-156 CONTACTS.
 3. UNIT ACCEPTS KEYING PLUG 640254-1 AND KEYING PIN 640255-1.
 4. CIRCUIT I.D. NUMBER(S) TO BE LOCATED SEQUENTIALLY AS SHOWN OR ONLY NO.1 CIRCUIT PLACED ON LOCKING RAMP.
 5. DIMENSIONS IN BRACKETS ARE IN INCHES.
- OPTIONAL CONSTRUCTION (BOTH CORNERS) UP TO 0.38 [.015] FOR P/N -1 THRU -5, UP TO 1.27 [.050] FOR P/N -6 THRU 2--4.

95.15	[3.746]	24	2-640250-4
91.19	[3.590]	23	2-640250-3
87.20	[3.433]	22	2-640250-2
83.24	[3.277]	21	2-640250-1
79.27	[3.121]	20	2-640250-0
75.31	[2.965]	19	1-640250-9
71.32	[2.808]	18	1-640250-8
67.36	[2.652]	17	1-640250-7
63.40	[2.496]	16	1-640250-6
59.44	[2.340]	15	1-640250-5
55.45	[2.183]	14	1-640250-4
51.49	[2.027]	13	1-640250-3
47.52	[1.871]	12	1-640250-2
43.56	[1.715]	11	1-640250-1
39.57	[1.558]	10	1-640250-0
35.61	[1.402]	9	640250-9
31.65	[1.246]	8	640250-8
27.69	[1.090]	7	640250-7
23.70	[.933]	6	640250-6
19.74	[.777]	5	640250-5
15.77	[.621]	4	640250-4
11.81	[.465]	3	640250-3
7.82	[.308]	2	640250-2
3.86	[.152]	1	640250-1
A ±0.25 [.010]		NO. OF CIRCUITS	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LEWIS	7-27-92	 TE Connectivity						
		CHK R. SWING	7-27-92							
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD E. REILES		NAME	HOUSING WITH LOCKING RAMP, SL-156					
		PRODUCT SPEC								
	0.005 1.005 2.005 3.005 4.005 ANGLES FINISH	APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
		WEIGHT								
MATERIAL NYLON,UL 94V-0 NATURAL		WEIGHT		DRAWING NO		RESTRICTED TO				
		CUSTOMER DRAWING		SCALE						
				4:1		SHEET	1 of 1	REV	U1	