


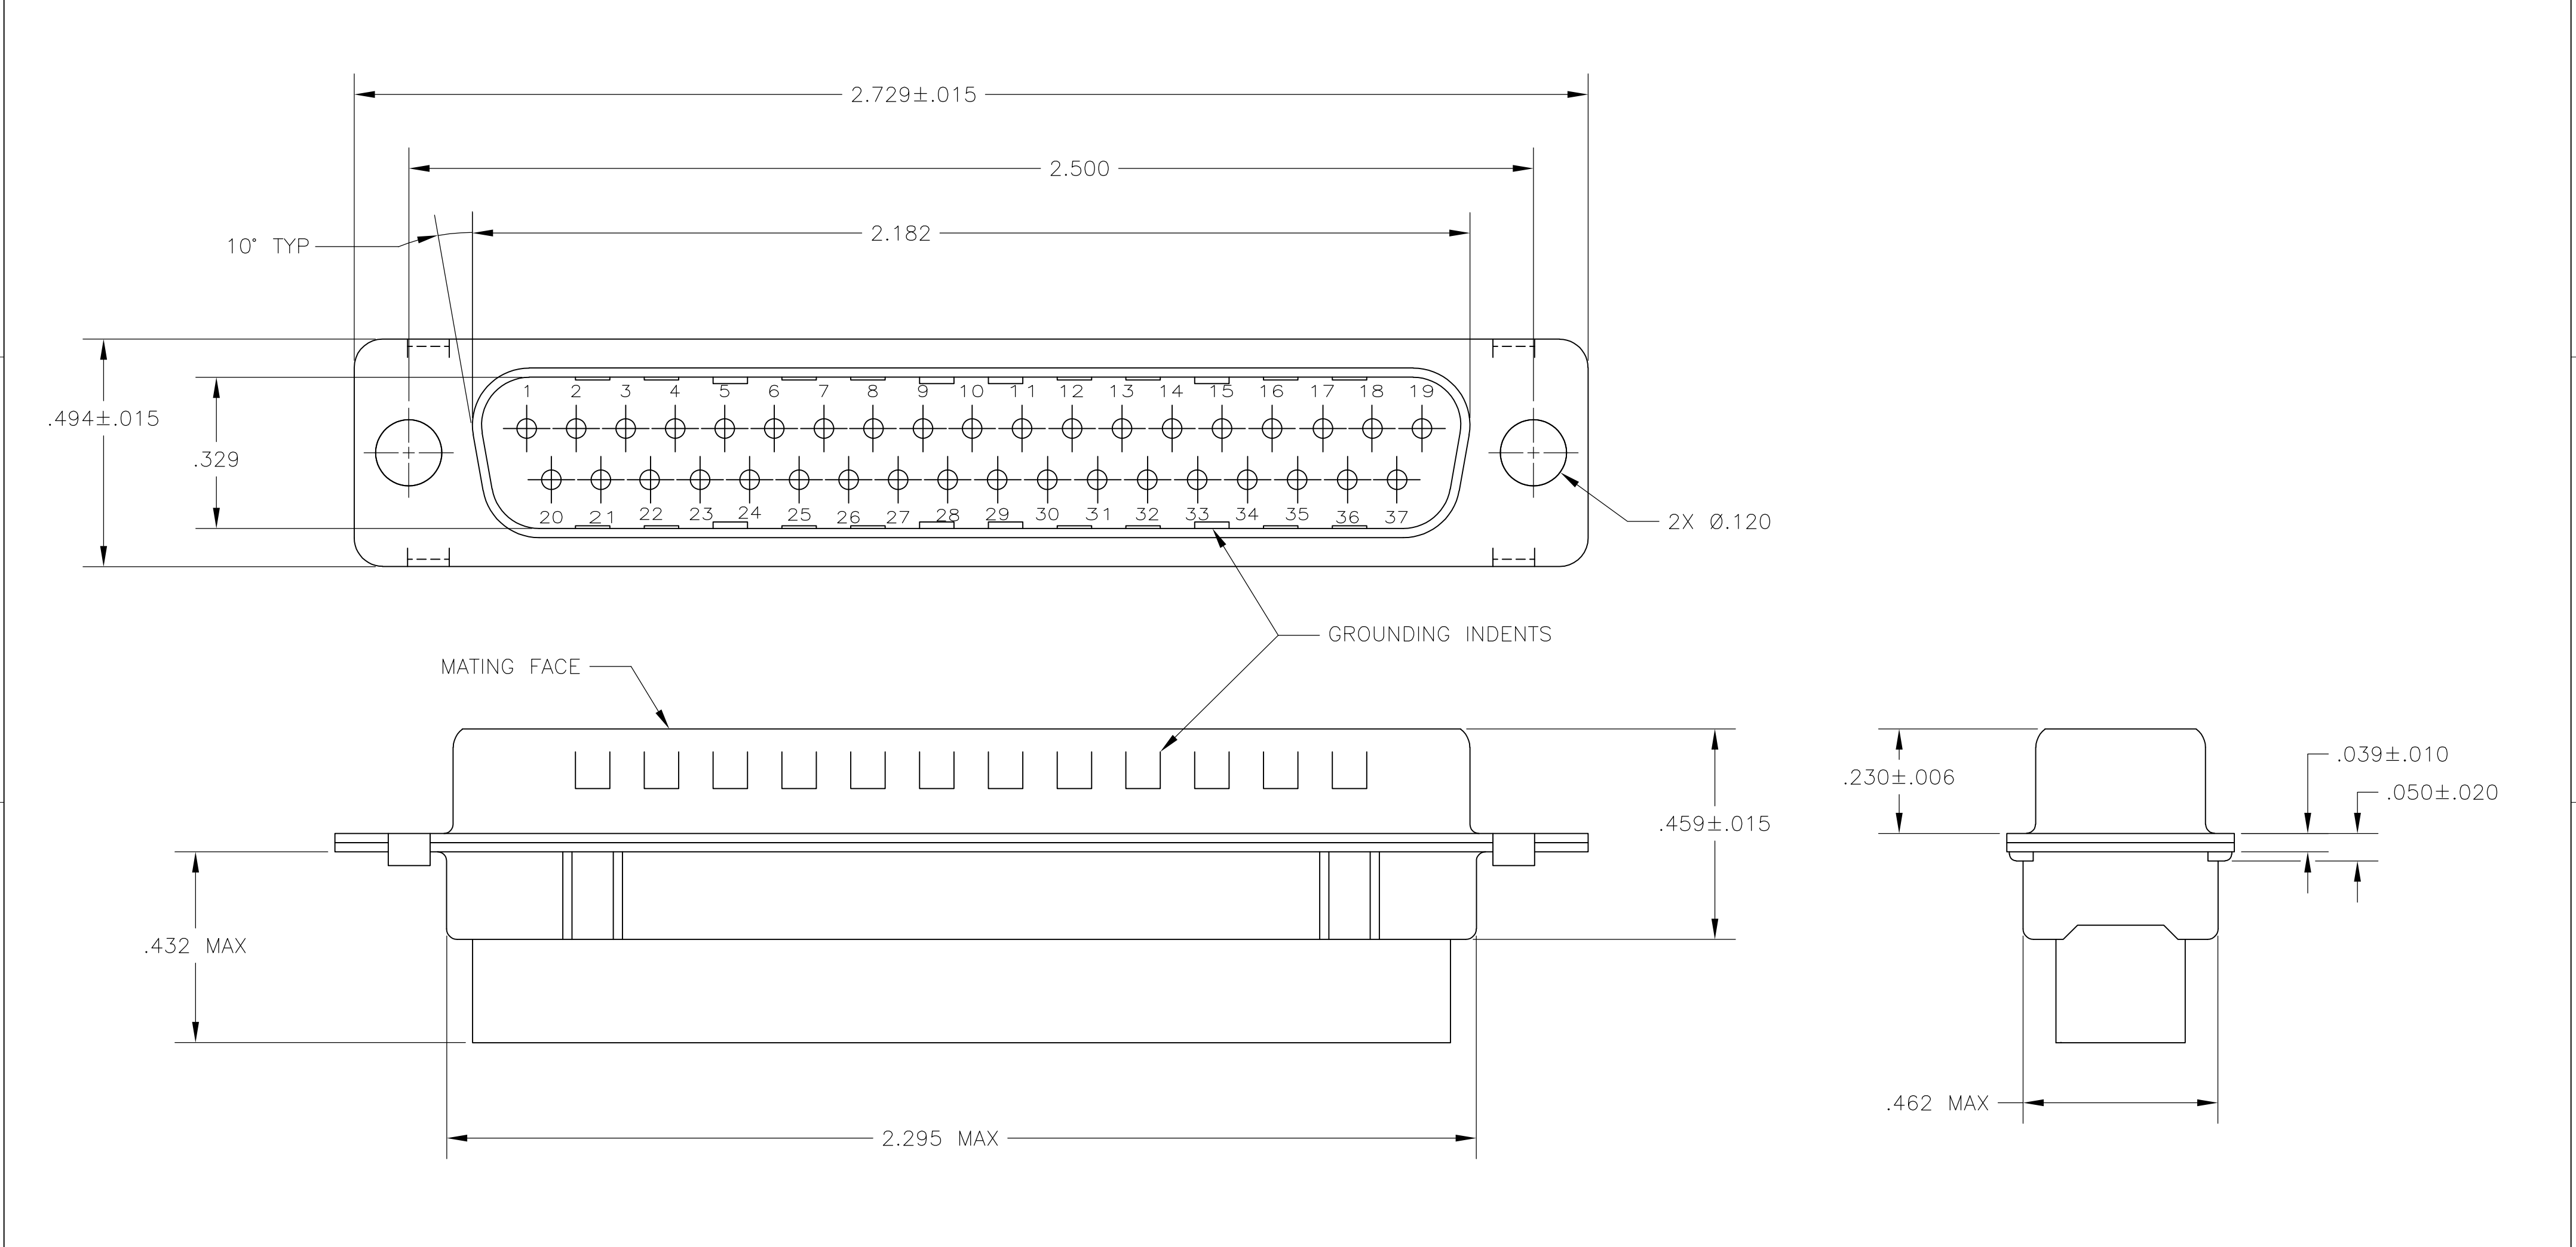

- 1. CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- 2. CONNECTOR COMPLIES WITH 108-40005 WHERE APPLICABLE.
- 3. MOLDED PARTS: NYLON, FLAME RETARDANT, 94V-0 RATED, GLASS FILLED, BLACK.
- 4. SHELL MATERIAL: STEEL PER ASTM A109.
- 5. SHELL FINISH: TIN PLATE OVER COPPER UNDERPLATE.

747568-3

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± .005
	4 PLC ± -
ANGLES ± 0° 30'	
MATERIAL SEE NOTES	FINISH SEE NOTES

DWN C. VALENTINE 18NOV2009	CHK C. ROHDE 18NOV2009	APVD C. ROHDE 18NOV2009	Tyco Electronics Corporation Harrisburg, PA 17105-3608		
PRODUCT SPEC			NAME PLUG ASSEMBLY, SIZE 4, 37 POSN, HDP-20, AMPLIMITE FOR SHIELDING HARDWARE		
APPLICATION SPEC			SIZE A2	CAGE CODE 00779	DRAWING NO C=747568
WEIGHT -			RESTRICTED TO -		
CUSTOMER DRAWING			SCALE NTS	SHEET 1 of 1	REV A