

SH Series

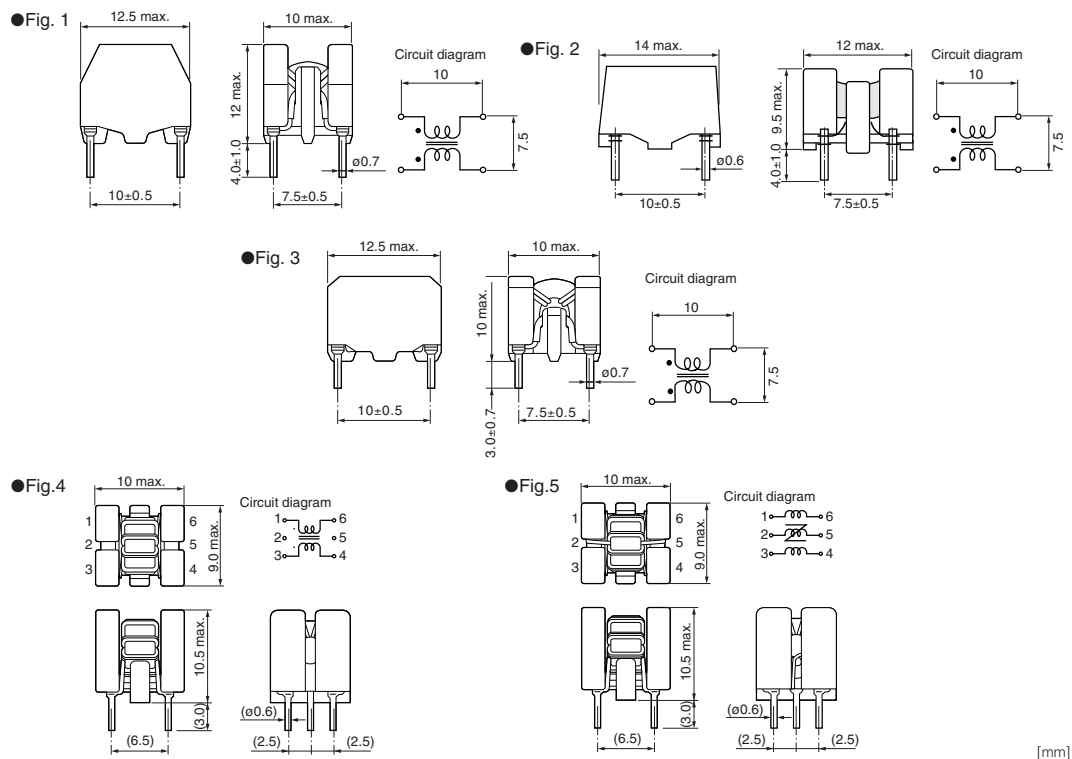
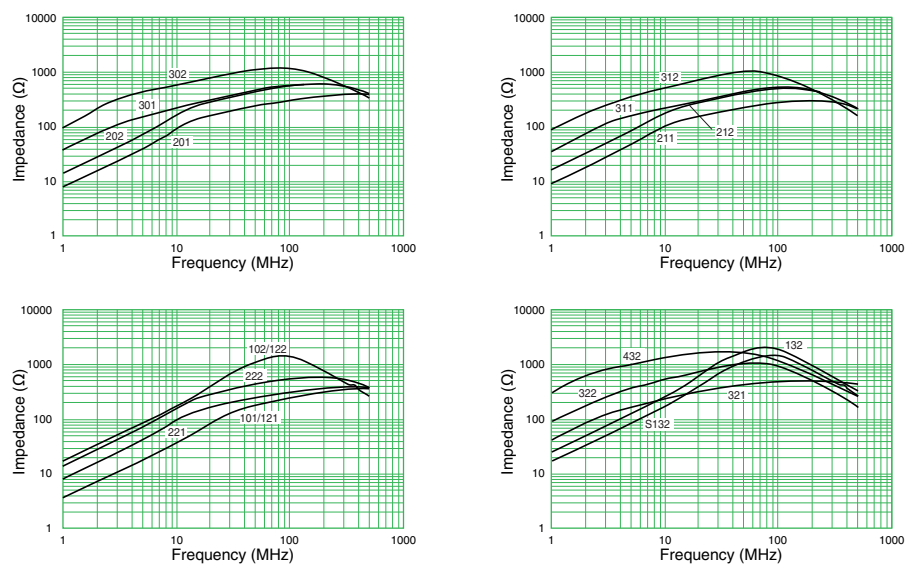
[RoHS Compliant]



Model	Rated voltage DC (V)	Rated current (A)	Inductance (μH) min.	DC resistance (mΩ/line) max.	Operating temperature range (°C)	Shape and dimensions
for 2 lines	SH-101	150	3.0	0.35	16	-25 to +80
	SH-102	150	3.0	1.5	26	-25 to +80
	SH-201	150	3.0	0.5	16	-25 to +80
	SH-202	150	3.0	1.5	20	-25 to +80
	SH-301	150	3.0	3.2	22	-25 to +80
	SH-302	150	3.0	7.5	26	-25 to +80
	SH-211	150	3.0	0.5	18	-25 to +80
	SH-212	150	3.0	1.5	23	-25 to +80
	SH-311	150	3.0	3.2	25	-25 to +80
	SH-312	150	3.0	7.5	30	-25 to +80
	SH-121	50	3.0	0.35	11	-25 to +80
	SH-122	50	3.0	1.5	20	-25 to +80
for 2 lines	SH-221	50	3.0	0.5	11	-25 to +80
	SH-222	50	3.0	1.5	14	-25 to +80
	SH-321	50	3.0	3.5	14	-25 to +80
	SH-322	50	3.0	7.5	20	-25 to +80
	SH-132	50	2.4	2.6	51	-25 to +60
	SH-432	50	2.4	30.0	51	-25 to +60
for 3 lines	SH-S132	50	1.0	1.7	81	-25 to +80



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Shape and Dimensions/Circuit Diagram

Impedance vs. Frequency


DC Line Filters VOL.08



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.