




INSULATED QUICK DISCONNECTS

NYLON-INSULATED DOUBLE CRIMP TERMINALS (NYD SERIES)

NYLON-FULLY INSULATED DOUBLE CRIMP FEMALE DISCONNECTS

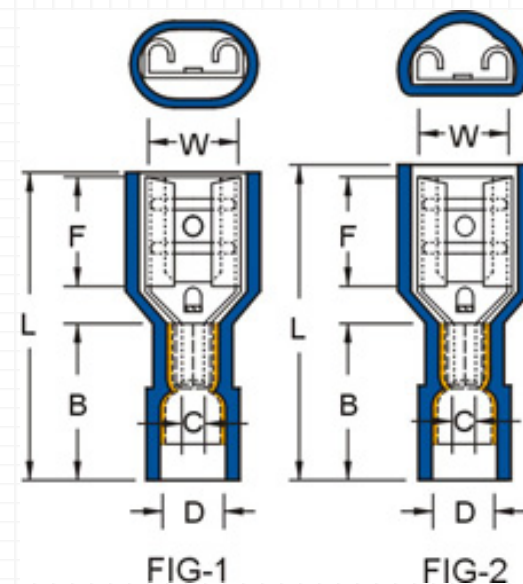

WIRE RANGE A.W.G. mm ²	ITEM NO.	NEMA TAB	DIMENSION inch(mm)	FIG	Q'TY BOX
			W		
22-16 A.W.G. 0.5-1.5 mm ²	FDFNYD1-110(5)	.020X.110 (0.5X2.8)	0.126 3.20	1	1000
	FDFNYD1-110(8)	.032X.110 (0.8X2.8)	0.126 3.20	1	1000
	FDFNYD1-187(5)	.020X.187 (0.5X4.75)	0.197 5.00	2	1000
	FDFNYD1-187(8)	.032X.187 (0.8X4.75)	0.197 5.00	2	1000
	FDFNYD1-250	.032X.250 (0.8X6.35)	0.260 6.60	1	1000
16-14 A.W.G.	FDFNYD2-187(5)	.020X.187 (0.5X4.75)	0.197 5.00	2	1000

1.5-2.5 mm ²	FDFNYD2-187(8)	.032X.187 (0.8X4.75)	0.197 5.00	2	1000
	FDFNYD2-250	.032X.250 (0.8X6.35)	0.260 6.60	1	1000
12-10 A.W.G. 4-6 mm ²	FDFNYD5-250	.032X.250 (0.8X6.35)	0.260 6.60	2	500