
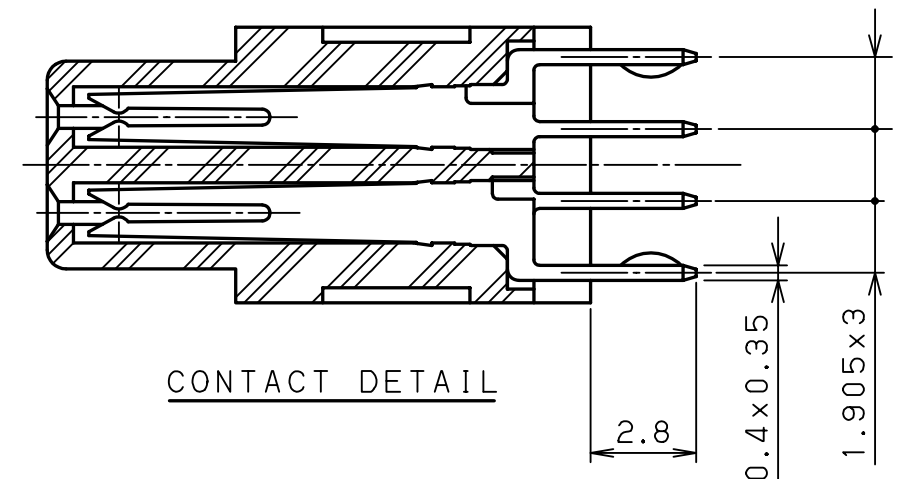
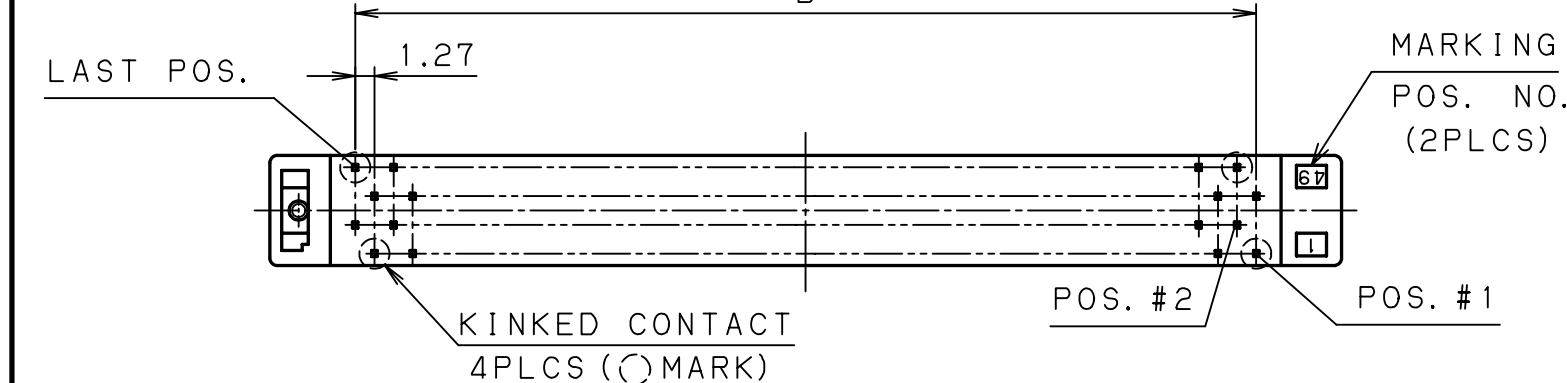
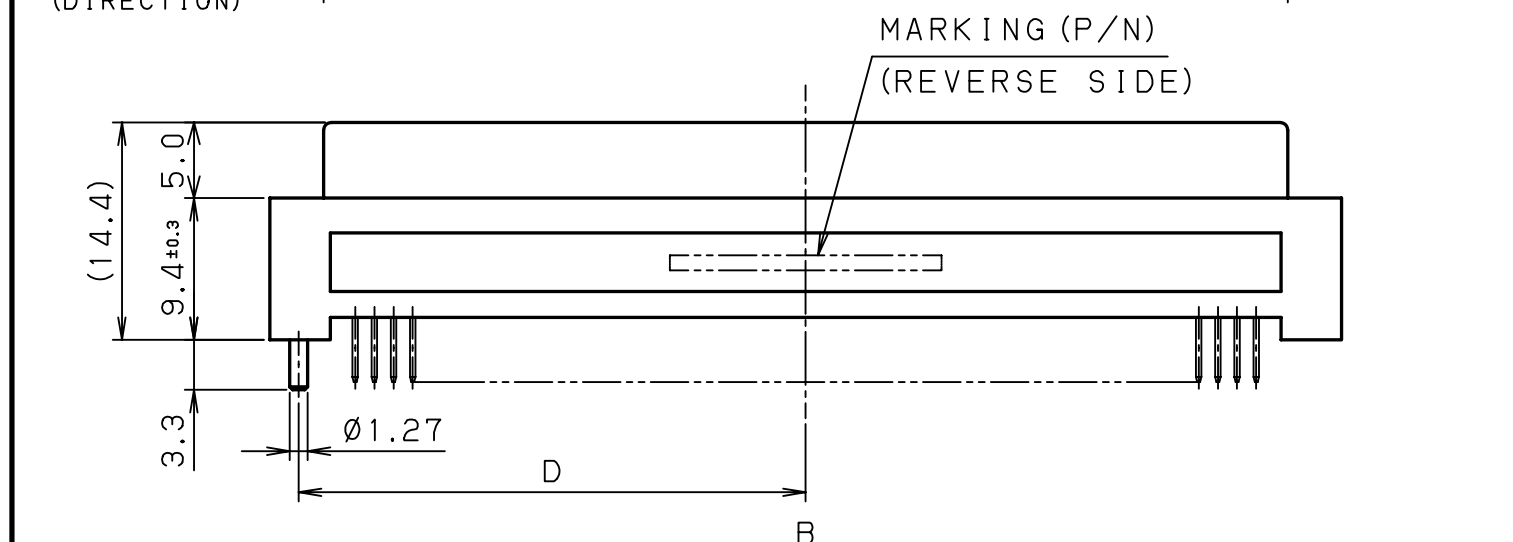
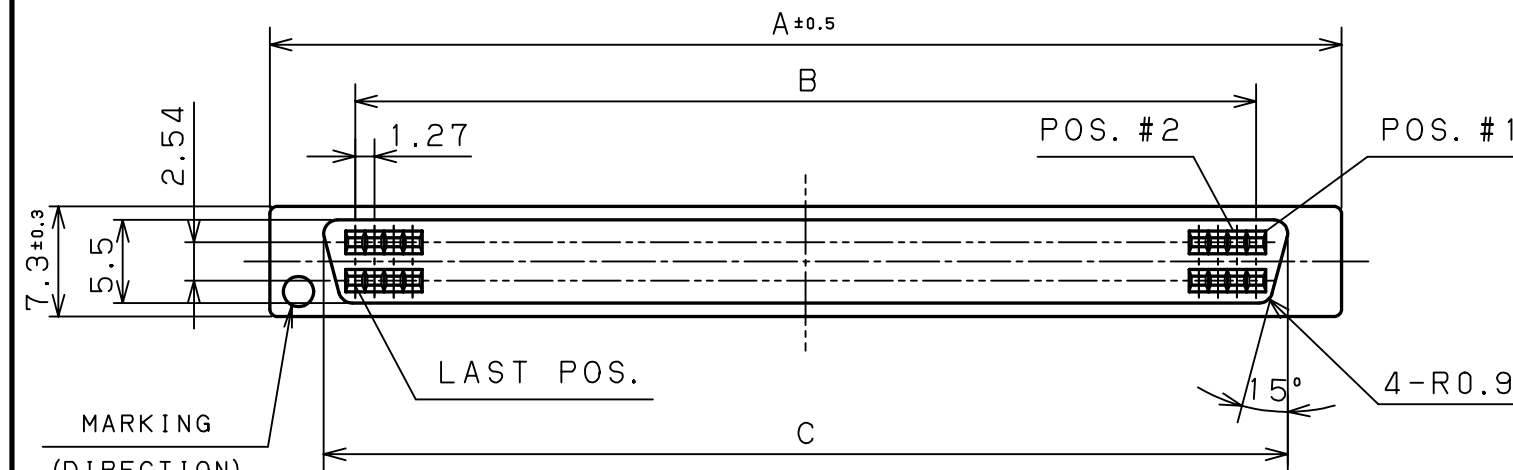


NOTE

1. CONTACT PLATING

GOLD (0.2 μ m MIN.) ON MATING AREA,
TIN/LEAD ON TERMINATION AREA,
ALL OVER NICKEL UNDERPLATED.

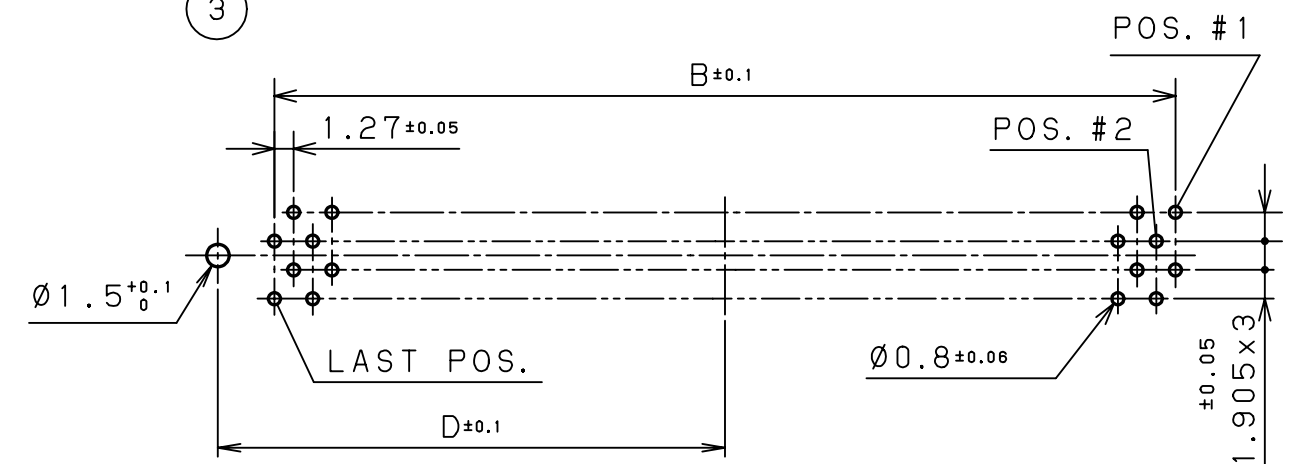

RECOMMENDED P. C. BOARD LAYOUT

(CONNECTOR SIDE)

P. C. BOARD THICKNESS: 1.6mm

PCS-96FD2KP-A	96	71.0	1.27x(48-1)=59.69	63.86	33.59	1, 49	HONDA PCS-96FD2
PART NO.	NO. OF POS.	A	B	C	D	POS. NO.	PART NO.
DIMENSIONS						MARKING	

③				3	KEY POST	PBT (GF)	1	_____	UL94V-0 BLACK
②				2	CONTACT	PHOSPHOR BRONZE	NO. OF POS.	NOTE #1	_____
①				1	INSULATOR	PBT (GF)	1	_____	UL94V-0 BLACK
改版 LTR.	年月日 DATE	変更者 BY	変 更 内 容 REV. DESCRIPT	番 号 No.	部 品 名 称 PART NAME	材 質 MATERIAL	個 数 QTY	処 理 FINISH	備 考 NOTE
年 月 日 DATE JAN. 18 (1991)		尺 度 SCALE 2/1		单 位 UNIT mm (INCH)	3 角 法 3RD. A. P	本 多 通 信 工 業 株 式 会 社 HONDA TSUSHIN KOGYO CO., LTD.			
製 図 DR.	設 計 DE.	検 査 CHK.	検 査 CHK.	承 認 APP.	名 称 NAME	PCS TYPE FEMALE CONNECTOR WITH KEY POST			
K. KASAI	K. KASAI	K. SATO	Y. HIRAI	H. MIYAZAKI	製 番 PART NO.	PCS - () FD2KP-A			