


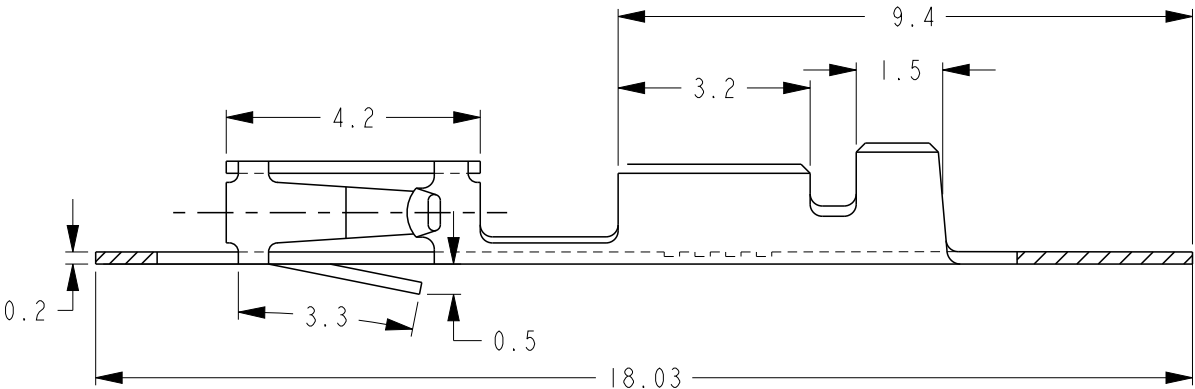


2		1				
LOC	DIST	REVISIONS				
H	-	P	LTR	DESCRIPTION	DATE	APVD
			C3	REVISED PER ECO-12-021315	10JAN2012	KH

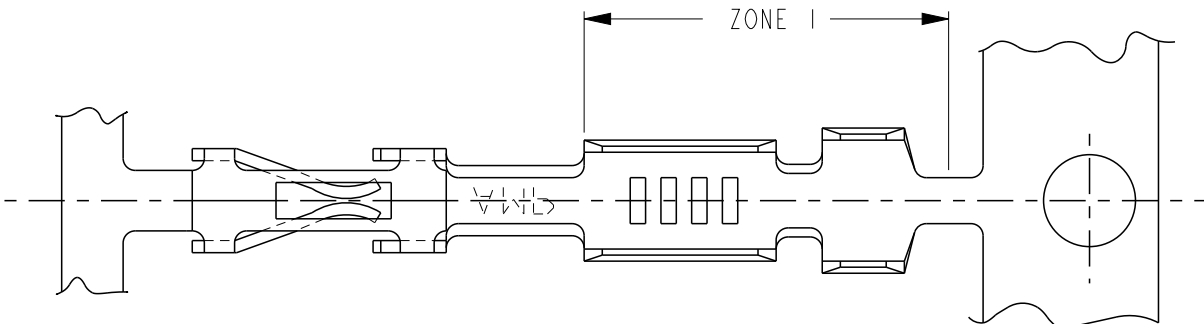

0,25 MAX.
CUT-OFF

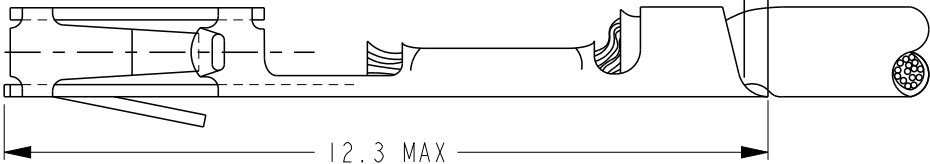

- 1
- FOR MINI-APPLICATOR-CRIMPING.
- 2
- UNDERCOATING:1,25μm Ni,SELECTIVE:0,8μm Au, NO GOLDFLASH.
- 3
- UNDERCOATING:1,25μm Ni,SELECTIVE:0,8μm Au,
REMAINDER:GOLDFLASH.
- 4
- PRE-TINPLATED:2,0μm.
- 5
- ZONE 1:MATT TIN PLATED.
- 6
- MATERIAL:PHOSPHORBRONZE
- 7
- FOR REELFED-HANDTOOL-CRIMPING, 500 CONTACTS ON A SMALL REEL.
- 8
- 24-20 AWG (0,20-0,56 mm²) WITH .055 CRIMPER.
26 AWG (0,12-0,14 mm²) WITH .042 CRIMPER.
- 9
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI

WIRE RANGE
8
INSUL. RANGE
1,4 MAX. DIA.

TIN	4	166310-3	5-166309-3	7
GOLD	3	166310-2	5-166309-2	7
GOLD	25	166310-1	5-166309-1	7
TIN	4	166310-3	166309-3	1
GOLD	3	166310-2	166309-2	1
GOLD	25	166310-1	166309-1	1
FINISH		LOOSE PIECE		PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±
FINISH SEE TABLE

DWN Rv HEUVEN 25JUNE07

CHK MvD 25JUNE07

APVD MvD -

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

TE Connectivity

AMPMODU MOD. V
RECEPTACLE,
HIGH PRESSURE, STRIP.

SIZE A3

CAGE CODE 00779

DRAWING NO C-166309

RESTRICTED TO -

SCALE NTS

SHEET 1 OF 1

REV C3