

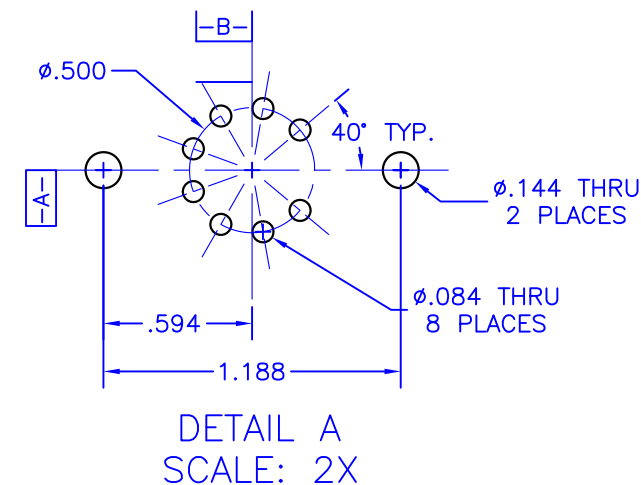
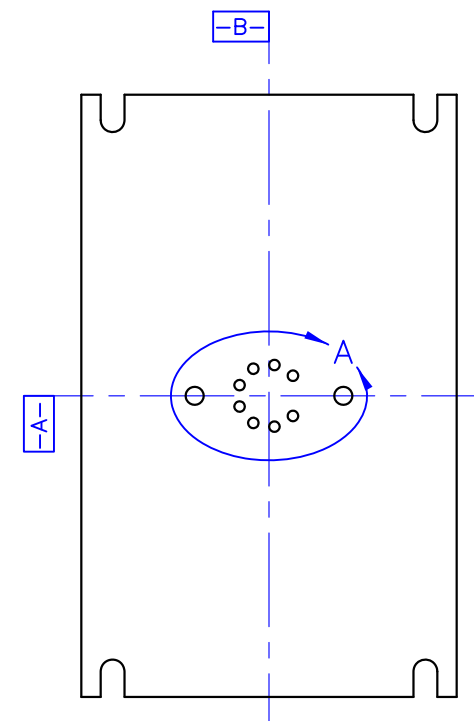
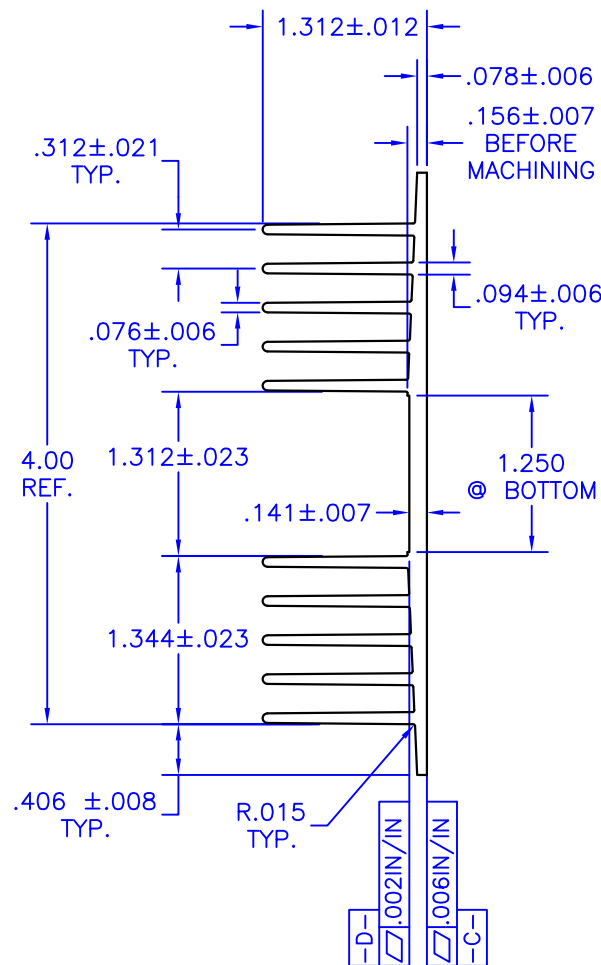


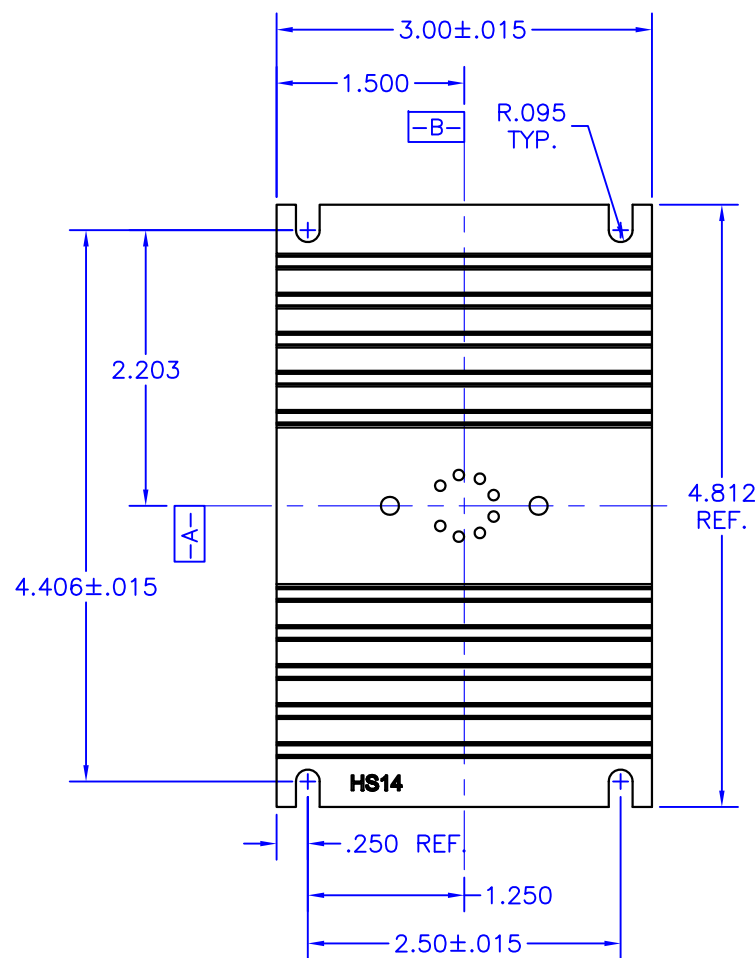

P1

HEATSINK

MAT'L: 6063-T5 ALUMINUM (AAVID EXTRUSION #60840)
FINISH: ANODIZE PER MIL-A-8625, TYPE II, CL 2, BLACK
TYPICAL BREAKDOWN VOLTAGE > 300V

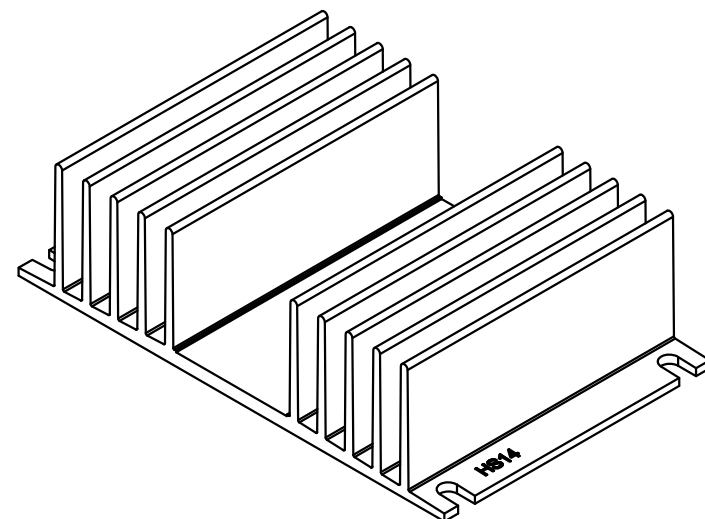

NOTES:

- UNLESS OTHERWISE NOTED, ALL DIMENSIONS ARE IN INCHES.
- BREAK ALL SHARP EDGES, DE-BURR & REMOVE LOOSE CHIPS.
- MARK WITH CONTRASTING INK AS SHOWN, IF SPECIFIED BY PURCHASE ORDER.
- THERMAL RATING: 2 °C/W
- APPROXIMATE WEIGHT: 7.5 oz [213g]

TOLERANCES - UNLESS OTHERWISE SPECIFIED				TITLE: TO-3 HEATSINK				MODEL: HS14			
.XX = ±.01 [.254]				SUBJECT: MECHANICAL DRAWING				FILENAME: HS14			
.XXX = ±.005 [.127]				ENGINEER: D-M				REV: I			
ANG. = ±5°				DRAWN BY: R.MOR				DATE: 03JAN14			
				DCA: 13497				SH: 1 OF 1			



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Apex Microtechnology:](#)

[HS14](#)