

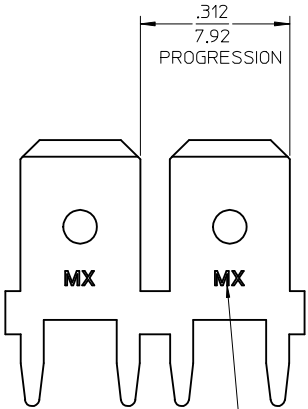
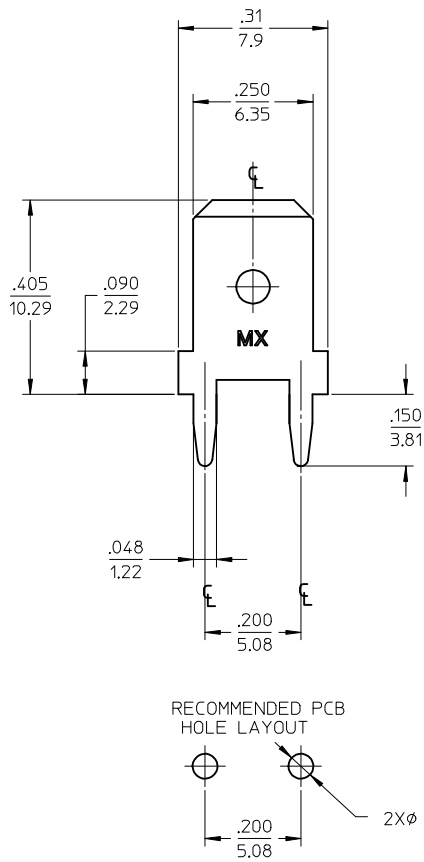


MATERIAL NUMBER	ENGINEERING NUMBER	CARRIER	LOGO ORIENTATION
197054303	19705-4303	STRIP	IN
197054305	19705-4305	STRIP	OUT
197054301	19705-4301	LOOSE	-



LOGO OPTIONS:
MX, ETC, OR MX-ETC

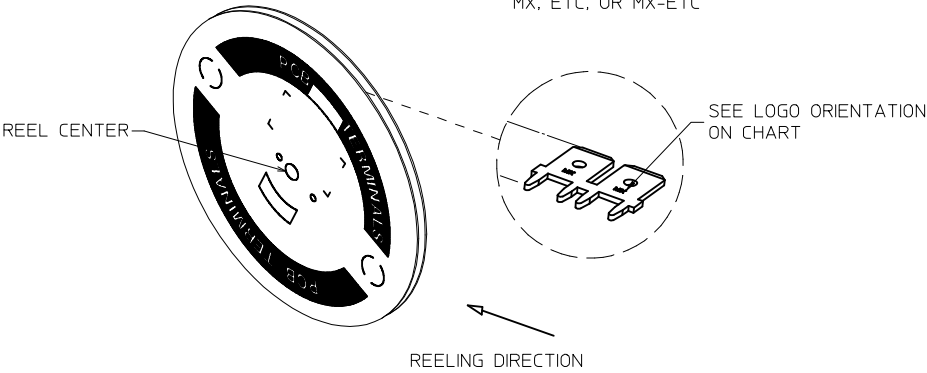

SCALE 3:1

- NOTES:
1. BARE EDGES PERMISSIBLE AT CARRIER CUT OFF.
 2. MATERIAL: BRASS C26000 (.032/0.81) THICK.
 3. TAB CONFORMS TO NEMA SPECIFICATIONS.
 4. ALL DIMENSIONS AND NOTES REFERENCE UNLESS OTHERWISE NOTED.
 5. PLATING: MATTE TIN 150μN/3.81μmm MINIMUM THICKNESS OVER NICKEL 50μN/1.25μmm MINIMUM THICKNESS.
 6. REF: 9,000 MINIMUM PARTS PER REEL, REEL HAS 14" DIAMETER REEL WITH A 1.25"DIAMETER CENTER HOLE.
 7. PART IS ROHS COMPLIANT.

REVISED PCB HOLE DIA		EC NO: ET2C007-0403		2007/05/14		2007/05/14		2007/05/15		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE		DESIGN UNITS		THIRD ANGLE PROJECTION	
		DRAWN: NEHLE		CHKD: JMACNEIL		APPR: JMACNEIL		DESCRIPTION		▽=0		mm		INCH		IN/MM		5:1		INCH	
										▽=0		4 PLACES ± ---		± ---		EDB		DATE		TITLE	
												3 PLACES ± ---		± .005		CHECKED BY		DATE		QUICK DISCONNECT	
												2 PLACES ± 0.13		± .01		JH		11/08/96		PCB MOUNTABLE	
												1 PLACE ± 0.25		± ---		APPROVED BY		DATE		.250 X .032 TAB	
												ANGULAR ± 1/2°				RWD		11/08/96		MOLEX INCORPORATED	
												DRAFT WHERE APPLICABLE				MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
												MUST REMAIN				SEE CHART		SD-19705-430		1 OF 1	
												WITHIN DIMENSIONS				SIZE					
																C				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	