

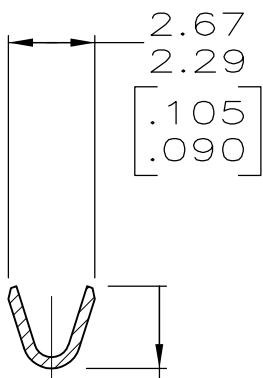
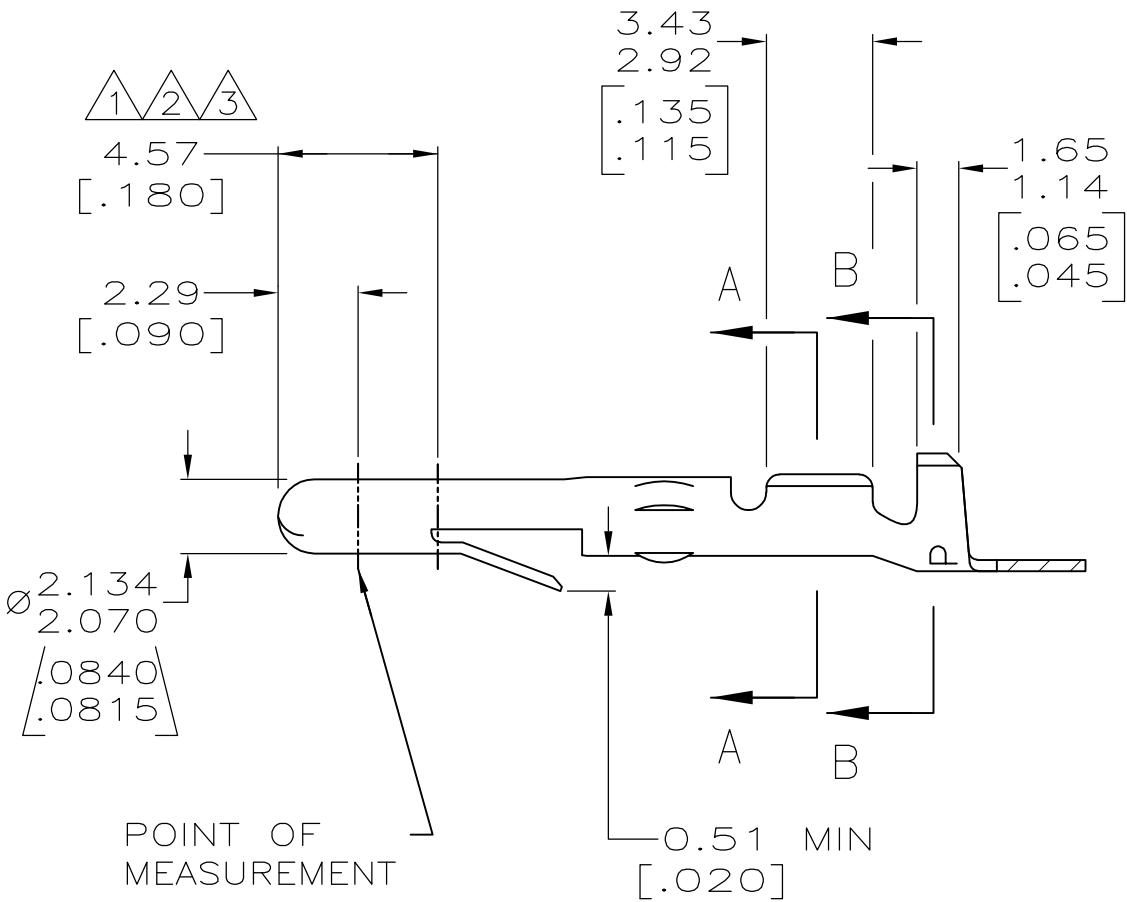


LOC	DIST	REVISIONS				
CM	53	P	LTR	DESCRIPTION	DATE	OWN
			AG2	REVISED PER ECO-11-010839	26MAY11	RK

APVD	HMR
------	-----

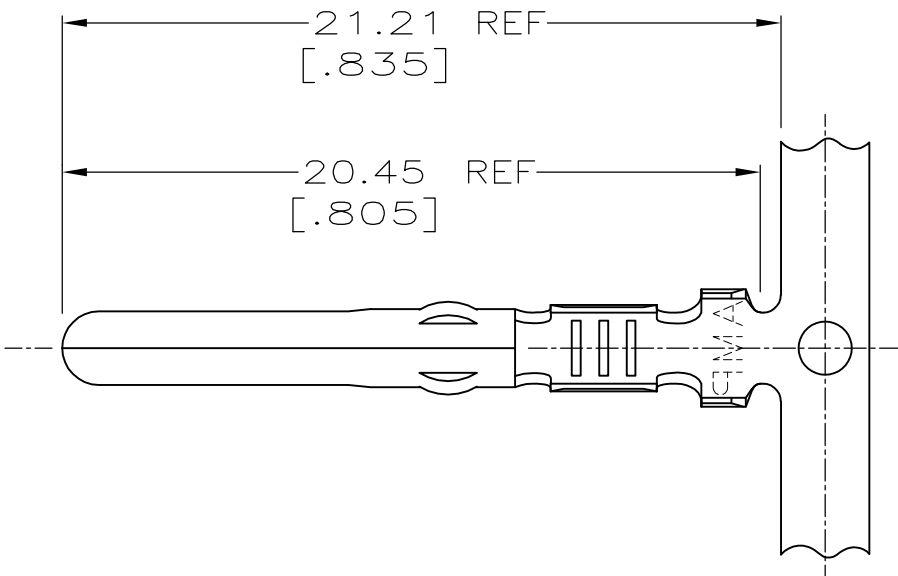

SECTION A-A

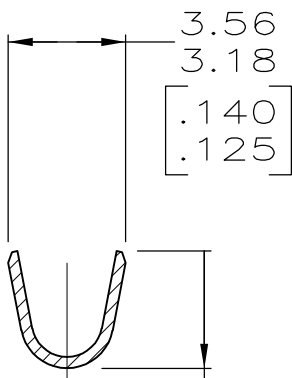

SECTION B-B

2.36 REF
[.093]

3.35 REF
[.132]

- 1

PLATE OVERALL WITH 0.00127 [.000050] MIN NICKEL, THEN TIP PLATE WITH 0.00076 [.000030] MIN GOLD IN THE MATING AREA.
- 2

PLATE OVERALL WITH 0.00127 [.000050] MIN NICKEL, THEN PLATE IN THE MATING AREA AND STRIPE THE INSIDE OF THE WIRE BARREL WITH 0.00076 [.000030] MIN GOLD.
- 3

PLATE OVERALL WITH 0.00127 [.000050] MIN NICKEL, THEN FLASH ENTIRE TERMINAL WITH GOLD, THEN TIP PLATE WITH 0.00076 [.000030] MIN GOLD IN THE MATING AREA.
4.

WIRE RANGE: 0.2 – 0.9 mm² [24 – 18 AWG] .
5.

INSULATION RANGE: 2.54 [.100] MAX DIA.
6.

APPLICATOR TYPE: MINI.
7.

DIMENSIONS IN BRACKETS ARE IN INCHES.

1	0.30 [.012] BRASS	61116-7
1	0.30 [.012] PH BRZ	61116-6
2	0.30 [.012] BRASS	61116-5
PRE-TIN	0.30 [.012] PH BRZ	61116-4
-	0.30 [.012] PH BRZ	61116-3
-	0.30 [.012] BRASS	61116-2
PRE-TIN	0.30 [.012] BRASS	61116-1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.BECK 2-18-93	TE Connectivity		
		CHK R. SWING 2-18-93			
DIMENSIONS: MM [INCHES]		APVD C. MARTIN 2-24-93	NAME PIN, MATE-N-LOK™		
		PRODUCT SPEC	SIZE A2		
		APPLICATION SPEC			
MATERIAL SEE TABLE		WEIGHT -	DRAWING NO 00779		RESTRICTED TO -
		CUSTOMER DRAWING	SCALE 5:1		SHEET 1 of 1
			REV AG2		

